


Forming Chain Oiler (Air Spray System)



Application

AUTOMATIC SPRAY LUBRICATION OF FORMING CHAIN PIN/BUSHING POINTS AS WELL AS LINK/LINK INTERACTION POINTS. PRECISION INTERNAL MIX NOZZLES DISPENSE A CONSISTENT STREAM OF LUBRICANT FILM ALONG THE AXIS OF WEAR POINTS. INDUCTIVE PROXIMITY SENSOR DETECTS CHAIN LINKS VIA ROLLER DETECTION. SYSTEM LOGIC INCLUSIVE OF LOW LEVEL SENSING FROM REMOTE DRUM LEVEL SENSOR. LIGHT STACK INDICATION OF SYSTEM CONDITION. GREEN INDICATION SHOWS SYSTEM OPERATING NORMALLY. RED LIGHT INDICATION OF LOW LUBE LEVEL. FLASHING RED LIGHT INDICATION OF SENSOR FAULT. ALL FAULTS ARE CONFIRMED VIA LCD ON CONTROL FACE. INTERNAL REGULATOR FOR CONTROL OF AIR SPRAY. SYSTEM CONFIGURABLE FOR LINKS TO LUBE AND LINKS TO SKIP. UNIT SHIPPED WITH CONTINUOUS DUTY LUBE CYCLE PROGRAMMED. DISCRETE VOLUME ADJUSTMENT MECHANICALLY CONTROLLED ON EACH LUBRICATION PUMP. REDUNDANT CHECK VALVES ENSURE NO-DRIP PERFORMANCE AND NOZZLE CLEARING IN THE EVEN OF DEBRIS OR CLOGGED TIP.

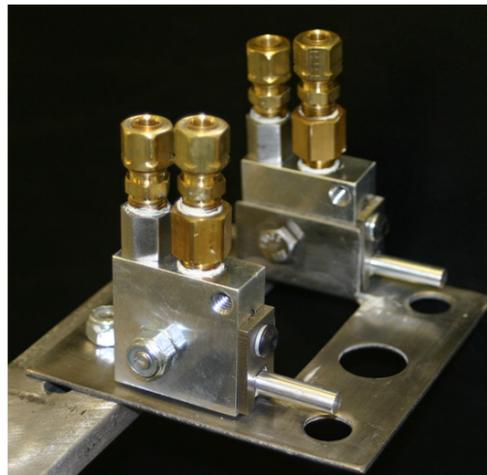

Technical Data:

Part No.	XEAMOLS04N12OC
Availability	3 WEEKS
Typical Install Time	2 1/2 HOURS
Number of Lube Points	4 CHAIN SPRAY POINTS
Lubrication Intervals	CONFIGURED
Recommended Lubes	JAX MLD, PYRO-KOTE
Power Requirements	115 VAC
Air Requirements	60 PSI MIN. / 125 PSI
Recommended Maintenance	REPLACE SOLENOIDS ANNUALLY, REPLACE PUMP SEALS EVERY 5 YEARS.

Performance Features:

- Consistency in lubrication.
- Automatic oil lubrication of multiple points.
- Smaller volumes of oil more frequently.
- Rigid Stainless mounting hardware.
- Logic control with fault monitoring.
- Low level indication from Drum supply.