



FACILITY PERMIT TO OPERATE

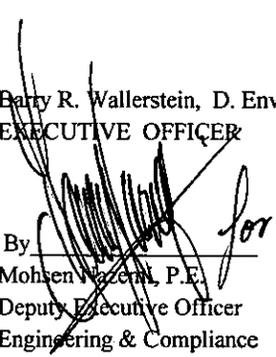
**TESORO REFINING AND MARKETING CO, LLC
2101 E PACIFIC COAST HWY
WILMINGTON, CA 90744**

NOTICE

IN ACCORDANCE WITH RULE 206, THIS PERMIT TO OPERATE OR A COPY THEREOF MUST BE KEPT AT THE LOCATION FOR WHICH IT IS ISSUED.

THIS PERMIT DOES NOT AUTHORIZE THE EMISSION OF AIR CONTAMINANTS IN EXCESS OF THOSE ALLOWED BY DIVISION 26 OF THE HEALTH AND SAFETY CODE OF THE STATE OF CALIFORNIA OR THE RULES OF THE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT. THIS PERMIT SHALL NOT BE CONSTRUED AS PERMISSION TO VIOLATE EXISTING LAWS, ORDINANCES, REGULATIONS OR STATUTES OF ANY OTHER FEDERAL, STATE OR LOCAL GOVERNMENTAL AGENCIES.

Barry R. Wallerstein, D. Env.
EXECUTIVE OFFICER

By  for
Mohsen Vaziri, P.E.
Deputy Executive Officer
Engineering & Compliance

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

TABLE OF CONTENTS

Section	Description	Revision #	Date Issued
A	Facility Information	3	02/15/2013
B	RECLAIM Annual Emission Allocation	14	07/29/2014
C	Facility Plot Plan	TO BE DEVELOPED	
D	Facility Description and Equipment Specific Conditions	22	07/29/2014
E	Administrative Conditions	3	02/15/2013
F	RECLAIM Monitoring and Source Testing Requirements	3	02/15/2013
G	Recordkeeping and Reporting Requirements for RECLAIM Sources	3	02/15/2013
H	Permit To Construct and Temporary Permit to Operate	21	07/29/2014
I	Compliance Plans & Schedules	7	07/29/2014
J	Air Toxics	4	02/15/2013
K	Title V Administration	5	02/15/2013
Appendix			
A	NOx and SOx Emitting Equipment Exempt From Written Permit Pursuant to Rule 219	3	02/15/2013
B	Rule Emission Limits	3	02/15/2013

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of NOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total NOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin (month/year)	Year End	Zone	NOx RTC Initially Allocated	NOx RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Non-Usable RTCs (pounds)
7/2011	6/2012	Coastal	0	0	0
7/2011	6/2012	Inland	0	192098	0
1/2012	12/2012	Coastal	750170	0	0
7/2012	6/2013	Coastal	0	0	0
1/2012	12/2012	Inland	0	0	0
7/2012	6/2013	Inland	0	0	0
1/2013	12/2013	Coastal	750170	0	0
7/2013	6/2014	Coastal	0	131391	0
1/2013	12/2013	Inland	0	15376	0
7/2013	6/2014	Inland	0	594111	0
1/2014	12/2014	Coastal	750170	370072	0
7/2014	6/2015	Coastal	0	305437	0
1/2014	12/2014	Inland	0	66174	0
7/2014	6/2015	Inland	0	594111	0
1/2015	12/2015	Coastal	750170	370072	0
7/2015	6/2016	Coastal	0	305437	0
1/2015	12/2015	Inland	0	66174	0

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (f)(1) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of NOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total NOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin End (month/year)	Zone	NOx RTC Initially Allocated	NOx RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Non-Usable RTCs (pounds)
7/2015 6/2016	Inland	0	594111	0
1/2016 12/2016	Coastal	750170	370072	0
7/2016 6/2017	Coastal	0	305437	0
1/2016 12/2016	Inland	0	66174	0
7/2016 6/2017	Inland	0	594111	0
1/2017 12/2017	Coastal	750170	370072	0
7/2017 6/2018	Coastal	0	305437	0
1/2017 12/2017	Inland	0	66174	0
7/2017 6/2018	Inland	0	594111	0
1/2018 12/2018	Coastal	750170	370072	0
7/2018 6/2019	Coastal	0	305437	0
1/2018 12/2018	Inland	0	66174	0
7/2018 6/2019	Inland	0	594111	0
1/2019 12/2019	Coastal	750170	370072	0
7/2019 6/2020	Coastal	0	305437	0
1/2019 12/2019	Inland	0	66174	0
7/2019 6/2020	Inland	0	594111	0

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (f)(1) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of NOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total NOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin End (month/year)	Zone	NOx RTC Initially Allocated	NOx RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Non-Usable RTCs (pounds)
1/2020 12/2020	Coastal	750170	370072	0
7/2020 6/2021	Coastal	0	305437	0
1/2020 12/2020	Inland	0	66174	0
7/2020 6/2021	Inland	0	594111	0
1/2021 12/2021	Coastal	750170	370072	0
7/2021 6/2022	Coastal	0	305437	0
1/2021 12/2021	Inland	0	66174	0
7/2021 6/2022	Inland	0	594111	0
1/2022 12/2022	Coastal	750170	370072	0
7/2022 6/2023	Coastal	0	305437	0
1/2022 12/2022	Inland	0	66174	0
7/2022 6/2023	Inland	0	594111	0
1/2023 12/2023	Coastal	750170	370072	0
7/2023 6/2024	Coastal	0	305437	0
1/2023 12/2023	Inland	0	66174	0
7/2023 6/2024	Inland	0	594111	0
1/2024 12/2024	Coastal	750170	370072	0

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (f)(1) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of NOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total NOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin (month/year)	Year End	Zone	NOx RTC Initially Allocated	NOx RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Non-Usable RTCs (pounds)
7/2024	6/2025	Coastal	0	305437	0
1/2024	12/2024	Inland	0	66174	0
7/2024	6/2025	Inland	0	594111	0
1/2025	12/2025	Coastal	750170	370072	0
7/2025	6/2026	Coastal	0	305437	0
1/2025	12/2025	Inland	0	66174	0
7/2025	6/2026	Inland	0	594111	0
1/2026	12/2026	Coastal	750170	370072	0
7/2026	6/2027	Coastal	0	305437	0
1/2026	12/2026	Inland	0	66174	0
7/2026	6/2027	Inland	0	594111	0
1/2027	12/2027	Coastal	750170	370072	0
7/2027	6/2028	Coastal	0	305437	0
1/2027	12/2027	Inland	0	66174	0
7/2027	6/2028	Inland	0	594111	0
1/2028	12/2028	Coastal	750170	370072	0
7/2028	6/2029	Coastal	0	305437	0

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (f)(1) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of NOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total NOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin End (month/year)	Zone	NOx RTC Initially Allocated	NOx RTC ¹	Non-Tradable ²
			Holding as of 07/29/2014 (pounds)	Non-Usable RTCs (pounds)
1/2028 12/2028	Inland	0	66174	0
7/2028 6/2029	Inland	0	594111	0
1/2029 12/2029	Coastal	750170	370072	0
1/2029 12/2029	Inland	0	66174	0

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (f)(1) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of SOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total SOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin End (month/year)	Zone	SOx RTC Initially Allocated	SOx RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Credits (NTCs) (pounds)
7/2011 6/2012	Coastal	0	329487	
1/2012 12/2012	Coastal	381905	175037	
7/2012 6/2013	Coastal	0	340426	
1/2012 12/2012	Inland	0	43096	
1/2013 12/2013	Coastal	381905	59352	
7/2013 6/2014	Coastal	0	366297	
1/2013 12/2013	Inland	0	31512	
1/2014 12/2014	Coastal	381905	213926	
7/2014 6/2015	Coastal	0	321411	
1/2014 12/2014	Inland	0	27650	
1/2015 12/2015	Coastal	381905	213926	
7/2015 6/2016	Coastal	0	321411	
1/2015 12/2015	Inland	0	27650	
1/2016 12/2016	Coastal	381905	213926	
7/2016 6/2017	Coastal	0	321411	
1/2016 12/2016	Inland	0	27650	
1/2017 12/2017	Coastal	381905	184051	29875

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (h)(2) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of SOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total SOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin End (month/year)	Zone	SOx RTC Initially Allocated	SOx RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Credits (NTCs) (pounds)
7/2017 6/2018	Coastal	0	276526	44885
1/2017 12/2017	Inland	0	23789	3861
1/2018 12/2018	Coastal	381905	184051	29875
7/2018 6/2019	Coastal	0	276526	44885
1/2018 12/2018	Inland	0	23789	3861
1/2019 12/2019	Coastal	381905	163145	50781
7/2019 6/2020	Coastal	0	245116	76295
1/2019 12/2019	Inland	0	21087	6564
1/2020 12/2020	Coastal	381905	163145	
7/2020 6/2021	Coastal	0	245116	
1/2020 12/2020	Inland	0	21087	
1/2021 12/2021	Coastal	381905	163145	
7/2021 6/2022	Coastal	0	245116	
1/2021 12/2021	Inland	0	21087	
1/2022 12/2022	Coastal	381905	163145	
7/2022 6/2023	Coastal	0	245116	
1/2022 12/2022	Inland	0	21087	

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (h)(2) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of SOx RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total SOx emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin End (month/year)	Zone	SOx RTC Initially Allocated	SOx RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Credits (NTCs) (pounds)
1/2023 12/2023	Coastal	381905	163145	
7/2023 6/2024	Coastal	0	245116	
1/2023 12/2023	Inland	0	21087	
1/2024 12/2024	Coastal	381905	163145	
7/2024 6/2025	Coastal	0	245116	
1/2024 12/2024	Inland	0	21087	
1/2025 12/2025	Coastal	381905	163145	
7/2025 6/2026	Coastal	0	245116	
1/2025 12/2025	Inland	0	21087	
1/2026 12/2026	Coastal	381905	163145	
7/2026 6/2027	Coastal	0	245116	
1/2026 12/2026	Inland	0	21087	
1/2027 12/2027	Coastal	381905	163145	
7/2027 6/2028	Coastal	0	245116	
1/2027 12/2027	Inland	0	21087	
1/2028 12/2028	Coastal	381905	163145	
7/2028 6/2029	Coastal	0	245116	

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (h)(2) of Rule 2002.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of SO_x RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. Total SO_x emission shall not exceed such annual allocations unless the operator obtains RTCs corresponding to the facility's increased emissions in compliance with Rules 2005 and 2007.

The level of Starting Allocation plus Non-Tradable Credits used to determine compliance with Rule 2005(c)(4) and applicability of Rule 2005(e) - Trading Zone Restrictions is listed on the last page of this Section.

The following table lists the annual allocations that were issued to this facility and the amounts of RTCs held by this facility on the day of printing this Section.

RECLAIM POLLUTANT ANNUAL ALLOCATION (POUNDS)

Year Begin End (month/year)	Zone	SO _x RTC Initially Allocated	SO _x RTC ¹ Holding as of 07/29/2014 (pounds)	Non-Tradable ² Credits (NTCs) (pounds)
1/2028 12/2028	Inland	0	21087	
1/2029 12/2029	Coastal	381905	163145	
1/2029 12/2029	Inland	0	21087	

Footnotes:

1. This number may change due to pending trades, emissions reported under Quarterly Certification of Emissions Report (QCER) and Annual Permit Emission Program (APEP) Report required pursuant to Rule 2004, or deductions made pursuant to Rule 2010(b). The most recent total RTC information can be obtained from the District's RTC Listing.
2. The use of such credits is subject to restrictions set forth in paragraph (h)(2) of Rule 2002.

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC**

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. If the facility submits a permit application to increase in an annual allocation to a level greater than the facility's starting Allocation plus Non-Tradable credits as listed below, the application will be evaluated for compliance with Rule 2005 (c)(4). Rule 2005 (e) - Trading Zone Restrictions applies if an annual allocation is increased to a level greater than the facility's Starting Allocation plus Non-Tradable Credits:

Year		Zone	NOx RTC	Non-Tradable
Begin	End		Starting Allocation	Credits(NTC)
(month/year)			(pounds)	(pounds)
1/1994	12/1994	Coastal	3077340	248242

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC**

SECTION B: RECLAIM ANNUAL EMISSION ALLOCATION

The annual allocation of RECLAIM Trading Credits (RTCs) for this facility is calculated pursuant to Rule 2002. If the facility submits a permit application to increase in an annual allocation to a level greater than the facility's starting Allocation plus Non-Tradable credits as listed below, the application will be evaluated for compliance with Rule 2005 (c)(4). Rule 2005 (e) - Trading Zone Restrictions applies if an annual allocation is increased to a level greater than the facility's Starting Allocation plus Non-Tradable Credits:

Year		Zone	SOx RTC	Non-Tradable
Begin	End		Starting Allocation	Credits(NTC)
(month/year)			(pounds)	(pounds)
1/1994	12/1994	Coastal	1589708	0

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 1: CRUDE DISTILLATION					P13.1
System 1: CRUDE DISTILLATION UNIT					S13.4, S15.2
FRACTIONATOR, V-1366, CRUDE, HEIGHT: 121 FT ; DIAMETER: 13 FT 6 IN A/N: 469239	D898				
ACCUMULATOR, REFLUX, V-1367, LENGTH: 24 FT ; DIAMETER: 10 FT 6 IN A/N: 469239	D1125				
ACCUMULATOR, V-1368, NAPHTHA, HEIGHT: 18 FT 6 IN; DIAMETER: 8 FT A/N: 469239	D1				
COLUMN, STRIPPER, V-1369, BURNER OIL DISTILLATE, HEIGHT: 46 FT ; DIAMETER: 4 FT A/N: 469239	D1126				
COLUMN, STRIPPER, V-1370, LAGO, HEIGHT: 46 FT ; DIAMETER: 4 FT A/N: 469239	D1127				
COLUMN, STRIPPER, V-1371, HAGO, HEIGHT: 20 FT ; DIAMETER: 4 FT A/N: 469239	D1128				
DRUM, CRUDE FLASH, V-1372, HEIGHT: 31 FT 6 IN; DIAMETER: 13 FT 6 IN A/N: 469239	D1129				
KNOCK OUT POT, V-1983, NAPHTHA/WATER PUMP SEPARATOR, HEIGHT: 3 FT 6 IN; DIAMETER: 1 FT A/N: 469239	D1690				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 1: CRUDE DISTILLATION					P13.1
KNOCK OUT POT, V-1376, CRUDE, LENGTH: 21 FT ; DIAMETER: 13 FT 6 IN A/N: 469239	D4				
DRUM, DECOKING QUENCH, V-1389, HEIGHT: 12 FT 6 IN; DIAMETER: 6 FT 6 IN A/N: 469239	D1131				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469239	D1354			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5
System 2: LIGHT ENDS FRACTIONATION					S13.4, S15.2, S15.3
COLUMN, DEBUTANIZER, V-1379, HEIGHT: 80 FT ; DIAMETER: 8 FT A/N: 469240	D5				
ACCUMULATOR, V-1380, DEBUTANIZER OVERHEAD, LENGTH: 15 FT ; DIAMETER: 5 FT A/N: 469240	D6				
COLUMN, SPLITTER, V-1381, NAPHTHA, HEIGHT: 80 FT ; DIAMETER: 6 FT A/N: 469240	D7				
ACCUMULATOR, V-1382, NAPHTHA SPLITTER OVERHEAD, LENGTH: 12 FT ; DIAMETER: 5 FT 6 IN A/N: 469240	D8				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469240	D1355			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5
System 3: CRUDE DISTILLATION HEATER					

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 1: CRUDE DISTILLATION					P13.1
HEATER, CRUDE, H-1, PROCESS GAS, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 198.98 MMBTU/HR WITH A/N: 509444 BURNER, REFINERY GAS, JOHN ZINK, MODEL PSMR-17, WITH LOW NOX BURNER, 12 TOTAL; 198.98 MMBTU/HR	D9	D76 D77 C764	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 35 PPMV (5) [RULE 1303(a)(1)-BACT, 5-10-1996]; CO: 2000 PPMV (5A) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.10, A99.17, A305.1, B61.1, D28.3, D90.7, H23.3
SELECTIVE CATALYTIC REDUCTION, ENGLEHARD, W/ A FIXED BED REACTOR, VANADIA-TITANIA CATALYST, HONEYCOMB TYPE, 480 CU.FT. WITH A/N: 469241 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C764	D9 S1356		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, E71.7
STACK A/N: 469241	S1356	C764			
System 4: CRUDE DESALTER					S31.3
VESSEL, DESALTER, V-2183, FIRST STAGE, HEIGHT: 20 FT ; DIAMETER: 16 FT A/N: 470262	D1478				
VESSEL, DESALTER, V-2184, SECOND STAGE, HEIGHT: 20 FT ; DIAMETER: 16 FT A/N: 470262	D1479				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 1: CRUDE DISTILLATION					P13.1
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470262	D1682			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
System 1: DELAYED COKING UNIT (DCU)					S13.4, S15.2, S15.9, S15.10, S31.1
FRACTIONATOR, FC-105 (V-900), HEIGHT: 147 FT 9 IN; DIAMETER: 16 FT A/N: 501288	D10				
COLUMN, STRIPPER, FC-106 (V-902), LIGHT GAS-OIL, HEIGHT: 25 FT ; DIAMETER: 4 FT 6 IN A/N: 501288	D1132				
COLUMN, STRIPPER, FC-107 (V-903), INTERMEDIATE GAS-OIL, HEIGHT: 25 FT ; DIAMETER: 4 FT 6 IN A/N: 501288	D1133				
COLUMN, STRIPPER, FC-108 (V-904), HEAVY GAS-OIL, HEIGHT: 25 FT ; DIAMETER: 4 FT 6 IN A/N: 501288	D1134				
DRUM, FLASH, FC-131 (V-927), FRESH FEED, LENGTH: 33 FT ; DIAMETER: 15 FT A/N: 501288	D11				
DRUM, SURGE, FC-135 (V-931), LGO, HEIGHT: 16 FT ; DIAMETER: 3 FT 6 IN A/N: 501288	D1135				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
VESSEL, DESALTER, FC-137 (V-933), LENGTH: 90 FT ; DIAMETER: 12 FT A/N: 501288	D1136				
DRUM, COKER HEATER SURGE, FC-146 (V-901), HEIGHT: 18 FT 6 IN; DIAMETER: 16 FT A/N: 501288	D1137				
SUMP, GLAND OIL, WIDTH: 5 FT ; DEPTH: 7 FT ; LENGTH: 5 FT A/N: 501288	D1141				
ACCUMULATOR, FRACTIONATOR OVERHEAD, FC-109 (V-905), LENGTH: 36 FT ; DIAMETER: 10 FT A/N: 501288	D15				
SCRUBBER, COMPRESSOR SUCTION, FC-110 (V-906), HEIGHT: 8 FT ; DIAMETER: 7 FT 6 IN A/N: 501288	D16				
ACCUMULATOR, FIRST STAGE DISCHARGE, FC-111 (V-907), LENGTH: 10 FT ; DIAMETER: 5 FT 6 IN A/N: 501288	D17				
ACCUMULATOR, SECOND STAGE DISCHARGE, FC-112 (V-908), LENGTH: 10 FT ; DIAMETER: 4 FT 6 IN A/N: 501288	D18				
ABSORBER, SPONGE OIL, FC-114 (V-910), HEIGHT: 57 FT 6 IN; DIAMETER: 3 FT 6 IN A/N: 501288	D1143				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
VESSEL, WATER COALESCER, V-2379, LENGTH: 12 FT 2 IN; DIAMETER: 4 FT A/N: 501288	D1661				
DRUM, COKE, FC-100-103 (V-895-898), 4 TOTAL, HEIGHT: 68 FT ; DIAMETER: 26 FT A/N: 501288	D20			PM: (9) [RULE 405, 2-7-1986]	E336.3
ACCUMULATOR, FC-126 (V-922), COKE DRUM CONDENSATE, LENGTH: 15 FT ; DIAMETER: 5 FT A/N: 501288	D1147				
COLUMN, DEBUTANIZER, FC-115 (V-911), HEIGHT: 85 FT 6 IN; DIAMETER: 5 FT 6 IN A/N: 501288	D906				
ACCUMULATOR, DEBUTANIZER OVERHEAD, FC-116 (V-912), LENGTH: 19 FT ; DIAMETER: 6 FT A/N: 501288	D24				
COLUMN, DEPROPANIZER, FC-117 (V-913), HEIGHT: 93 FT 1 IN; DIAMETER: 5 FT A/N: 501288	D25				
ACCUMULATOR, DEPROPANIZER OVERHEAD, FC-118 (V-914), LENGTH: 11 FT ; DIAMETER: 4 FT 4 IN A/N: 501288	D900				
COLUMN, SPLITTER, FC-119 (V-915), NAPHTHA, HEIGHT: 84 FT 1 IN; DIAMETER: 7 FT A/N: 501288	D26				

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
ACCUMULATOR, NAPHTHA SPLITTER OVERHEAD, FC-120 (V-916), HEIGHT: 14 FT ; DIAMETER: 5 FT 6 IN A/N: 501288	D27				
SCRUBBER, V-917, SPONGE OIL ABSORBER GAS, HEIGHT: 8 FT ; DIAMETER: 3 FT 6 IN A/N: 501288	D1149				
ABSORBER, AMINE, FC-122 (V-918), RESIDUE GAS, HEIGHT: 40 FT ; DIAMETER: 3 FT A/N: 501288	D28				
SCRUBBER, RESIDUE GAS, FC-123 (V-919), HEIGHT: 8 FT ; DIAMETER: 3 FT A/N: 501288	D1088				
ABSORBER, AMINE, FC-124 (V-920), PROPANE/PROPYLENE, HEIGHT: 30 FT ; DIAMETER: 5 FT A/N: 501288	D29				
VESSEL, SEPARATOR, FC-130 (V-926), AMINE, LENGTH: 10 FT ; DIAMETER: 3 FT 6 IN A/N: 501288	D30				
DRUM, FLASH, FC-147 (V-942), RICH AMINE, LENGTH: 15 FT ; DIAMETER: 8 FT 6 IN A/N: 501288	D31				
PIT, COKE, WITH FOUR COKE DRUM CHUTES, WIDTH: 36 FT ; HEIGHT: 21 FT ; LENGTH: 585 FT A/N: 501288	D1151			PM: (9) [RULE 405, 2-7-1986]	

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
COMPRESSOR, OVERHEAD, C-145 A/N: 501288	D901				H23.4
VESSEL, H-100/101, FUEL GAS, 2 TOTAL A/N: 501288	D904				
COMPRESSOR, C-87 (PC-100), WITH TANDEM GAS SEALS A/N: 501288	D969				
DRUM, RICH OIL FLASH DRUM, V-2332, LENGTH: 10 FT ; DIAMETER: 3 FT 6 IN A/N: 501288	D1567				
HEAT EXCHANGER, PROPANE VAPORIZER E-1465 A/N: 501288	D1616				
COLUMN, DEETHANIZER, FC-113 (V-909), HEIGHT: 104 FT 2 IN; DIAMETER: 8 FT 6 IN A/N: 501288	D19				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 501288	D1357			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 2: DCU HEATERS					

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
HEATER, H-101, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 218.4 MMBTU/HR WITH A/N: 509460 BURNER, REFINERY GAS, JOHN ZINK, MODEL PSMR-10, WITH LOW NOX BURNER, 80 TOTAL; 218.4 MMBTU/HR	D32		NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 35 PPMV (5A) [RULE 1303(a)(1)-BACT, 5-10-1996]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 24.7 LBS/HR (7) [RULE 2005, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.2, A99.18, B61.1, D28.3, D90.7, E193.5, H23.3
HEATER, H-100, PROCESS GAS, REFINERY GAS, 252 MMBTU/HR A/N: 469243	D33	D76 D77 C768 S987	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, E54.9, E54.17, H23.3
SELECTIVE CATALYTIC REDUCTION, ENGLEHARD, W/ A FXD BED REACTOR, VANADIA-TITANIA CATALYST, HONEYCOMB TYPE, 635 CU.FT. WITH A/N: 469253 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C768	D33 S987		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, E71.7
STACK A/N: 469253	S987	D33 C768			
System 3: MEROX TREATING UNIT FOR DCU					S13.4, S15.2, S15.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
VESSEL, CAUSTIC PREWASH, FC-600 (V-881), HEIGHT: 20 FT ; DIAMETER: 5 FT 6 IN A/N: 469263	D52				
VESSEL, EXTRACTOR, FC-601 (V-882), HEIGHT: 48 FT ; DIAMETER: 4 FT 6 IN A/N: 469263	D54				
OXIDIZER, FC-602 (V-883), HEIGHT: 18 FT ; DIAMETER: 3 FT 6 IN A/N: 469263	D907				
VESSEL, SEPARATOR, FC-603 (V-884), DISULFIDE, WITH MIST ELIMINATOR, HEIGHT: 20 FT ; DIAMETER: 6 FT A/N: 469263	D56				
REACTOR, MEROX, FC-605 (V-886), HEIGHT: 25 FT ; DIAMETER: 6 FT A/N: 469263	D58			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
SETTLING TANK, FC-606 (V-887), CAUSTIC, LENGTH: 22 FT ; DIAMETER: 6 FT A/N: 469263	D60				
FILTER, SAND, FC-607 (V-888), HEIGHT: 14 FT ; DIAMETER: 6 FT A/N: 469263	D62				
POT, LIQUID CATALYST ADDITION, FC-608, HEIGHT: 4 FT ; DIAMETER: 2 FT A/N: 469263	D1154				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469263	D1359			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
System 6: DCU BLOWDOWN RECOVERY SYSTEM					S13.4, S15.2, S15.3, S15.11, S31.4
ACCUMULATOR, BLOWDOWN, FC-127 (V-923), LENGTH: 20 FT ; DIAMETER: 10 FT A/N: 520770	D53				
POT, STEAM CONDENSATE, V-X103, HEIGHT: 5 FT ; DIAMETER: 2 FT A/N: 520770	D1684				
VESSEL, BLOWDOWN CONTACTOR, FC-128 (V-924), HEIGHT: 40 FT ; DIAMETER: 16 FT A/N: 520770	D1152				
KNOCK OUT POT, DISCHARGE, V-1400, HEIGHT: 7 FT 8 IN; DIAMETER: 3 FT A/N: 520770	D63				
DRUM, FLARE SEAL, V-1613, LENGTH: 19 FT 6 IN; DIAMETER: 6 FT A/N: 520770	D65				
COMPRESSOR, C-137, BLOWDOWN FLARE GAS RECOVERY A/N: 520770	D68				H23.4
DRUM, V-1613, DCU FLARE SEAL, HEIGHT: 25 FT ; DIAMETER: 5 FT A/N: 520770	D1350				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 520770	D1361			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5
System 7: DECOKING VENT GAS DISPOSAL					S13.4

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
DRUM, DCU DECOKING QUENCH, V-938, HEIGHT: 12 FT ; DIAMETER: 5 FT A/N: 469266	D76	D9 D33			
DRUM, CRUDE DECOKING QUENCH, V-1389, HEIGHT: 15 FT ; DIAMETER: 10 FT A/N: 469266	D77	D9 D33			
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469266	D1367			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5
System 8: COKE HANDLING, SCREENING AND LOADING					S7.1, S13.3
CONVEYOR, BELT, TUBE ENCLOSED, CB-37, PETROLEUM COKE, RECLAIM TRANSFER, 55 FEET LONG WITH ENCLOSED TRANSFER POINT A/N: 519994	D1698			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
HOPPER, RECEIVING, QQ-942, PETROLEUM COKE, PORTABLE A/N: 519994	D1155			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
STORAGE BUILDING, PETROLEUM COKE BARN A/N: 519994	D1438			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
FEEDER, SPREADER, QQ-943, PORTABLE, PETROLEUM COKE A/N: 519994	D1160			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-944, PETROLEUM COKE, PORTABLE A/N: 519994	D1156			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
CONVEYOR, BELT, QQ-950, PETROLEUM COKE, WITH AN ENCLOSED TRANSFER POINT, 733 FEET LONG A/N: 519994	D1157			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-951, PETROLEUM COKE, COVERED, 33 FEET LONG, WITH AN ENCLOSED TRANSFER POINT A/N: 519994	D1158			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-952, PETROLEUM COKE, COVERED, 414 FEET LONG, WITH AN ENCLOSED TRANSFER POINT A/N: 519994	D1159			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
HOPPER, SCREEN FEED, QQ-972-75, 4 TOTAL, PETROLEUM COKE, EACH 60 TONS A/N: 519994	D34			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-968-971, 4 TOTAL, PETROLEUM COKE, COVERED, EACH 14 FEET LONG A/N: 519994	D41			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
SCREEN, CLASSIFYING, QQ-964-967, PETROLEUM COKE, 4 TOTAL, DOUBLE-DECK VIBRATING TYPE, WIDTH: 8 FT ; LENGTH: 20 FT A/N: 519994	D45			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-954/955, 2 TOTAL, PETROLEUM COKE, COVERED, REVERSIBLE TYPE, EA. W/ AN ENCLOSED TRANSFER POINT, AND EA 61 FT LONG A/N: 519994	D49			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
CONVEYOR, QQ-960, PETROLEUM COKE, COVERED, SHUTTLE BELT TYPE, WITH AN ENCLOSED TRANSFER POINT, 80 FEET LONG A/N: 519994	D47			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
HOPPER, RAIL CAR LOADING, QQ-945, PETROLEUM COKE, THREE 45 TON CAPACITY SECTIONS WITH LOADING ARM, RAIL CAR, LOADING CHUTE, 3 TOTAL, PETROLEUM COKE, EACH WITH AN ELEVATION HOIST AND AN EXTENSION DRIVE A/N: 519994	D1162			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-956, PETROLEUM COKE, COVERED, WITH AN ENCLOSED TRANSFER TOWER, 255 FEET LONG A/N: 519994	D1161			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-957, PETROLEUM COKE, COVERED, WITH AN ENCLOSED TRANSFER POINT, 152 FEET LONG A/N: 519994	D1164			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, QQ-958, PETROLEUM COKE, SHUTTLE BELT TYPE, 52 FEET LONG, WITH A FEEDER A/N: 519994	D1165			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
System 9: COKE HANDLING					S7.2, S13.3

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
CONVEYOR, BELT, CB-36, PETROLEUM COKE, WITH A WIPER SYSTEM AND AN ENCLOSED TRANSFER POINT, 30 FEET LONG A/N: 519996	D1699			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
LOADING ARM, COKE PIT BRIDGE CRANE, QQ-109, PETROLEUM COKE, WITH A CLAMSHELL LOADER, 6 CU.YD. WITH A/N: 519996 HOPPER, RECEIVING, PETROLEUM COKE FEEDER, GRIZZLY BAR, PETROLEUM COKE CRUSHER, DOUBLE-ROLL TYPE, PETROLEUM COKE FEEDER, VIBRATING TYPE, PETROLEUM COKE	D1170			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-916, PETROLEUM COKE, WITH AN ENCLOSED TRANSFER POINT, 294 FEET LONG A/N: 519996	D1093			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-917, PETROLEUM COKE, WITH AN ENCLOSED TRANSFER POINT, 602 FEET LONG A/N: 519996	D1094			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
CONVEYOR, BELT, QQ-918, PETROLEUM COKE, WITH AN ENCLOSED TRANSFER POINT, 422 FEET LONG A/N: 519996	D1173			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-919, PETROLEUM COKE, WITH AN ENCLOSED TRANSFER POINT, 496 FEET LONG A/N: 519996	D1174			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-920, PETROLEUM COKE, WITH AN ENCLOSED TRANSFER POINT, 1144 FEET LONG A/N: 519996	D1175			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
CONVEYOR, BELT, QQ-921, PETROLEUM COKE, WITH A WIPER SYSTEM AND AN ENCLOSED TRANSFER POINT, 300 FEET LONG A/N: 519996	D1176			PM: (9) [RULE 405, 2-7-1986]	A63.6, D323.1
System 10: VACUUM DISTILLATION					S13.4, S15.2, S31.5
VESSEL, VACUUM JET HOT WELL, FC-132 (V-928), LENGTH: 20 FT ; DIAMETER: 4 FT A/N:	D13				
ABSORBER, AMINE, FC-160 (V-937), VACUUM VENT GAS, HEIGHT: 28 FT 6 IN; DIAMETER: 3 FT A/N:	D14				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N:	D1557			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
System 1: FCCU RECOVERY SECTION					S13.4, S15.2, S15.12, S31.1
ABSORBER, V-406, HEIGHT: 64 FT 4 IN; DIAMETER: 4 FT 6 IN A/N:	D78				
TOWER, SPLITTER, HEAVY NAPHTHA, V-407, HEIGHT: 47 FT ; DIAMETER: 5 FT 6 IN A/N:	D1267				
TOWER, RERUN, V-408, HEIGHT: 82 FT ; DIAMETER: 7 FT A/N:	D1268				
TOWER, SPLITTER, LIGHT NAPHTHA, V-409, HEIGHT: 60 FT ; DIAMETER: 8 FT 6 IN A/N:	D1269				
COLUMN, DEPROPANIZER, V-410, HEIGHT: 80 FT ; DIAMETER: 6 FT A/N:	D908				
ACCUMULATOR, V-413, HEIGHT: 10 FT ; DIAMETER: 5 FT A/N:	D79				
DRUM, V-414, RERUN REFLUX A/N:	D915				
ACCUMULATOR, V-415, SPLITTER TOWER REFLUX, HEIGHT: 19 FT ; DIAMETER: 5 FT 7 IN A/N:	D80				
ACCUMULATOR, V-416, DEPROPANIZER TOWER REFLUX, LENGTH: 19 FT ; DIAMETER: 6 FT 6 IN A/N:	D81				

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
DRUM, DRYING, LOW PRESSURE, V-419, HEIGHT: 20 FT ; DIAMETER: 10 FT A/N:	D82				
VESSEL, SEPARATOR, HIGH PRESSURE, V-422, LENGTH: 19 FT ; DIAMETER: 8 FT A/N:	D83				
VESSEL, SURGE, V-423, AVGAS CHARGE, HEIGHT: 19 FT ; DIAMETER: 7 FT 7 IN A/N:	D84				
DRUM, DRYING, V-424, RERUN TOWER GAS, HEIGHT: 10 FT ; DIAMETER: 3 FT 6 IN A/N:	D85				
KNOCK OUT POT, FLARE, V-431, LENGTH: 13 FT ; DIAMETER: 6 FT A/N:	D1271				
DRUM, PRESSURE RELIEVING SEAL, V-432, HEIGHT: 43 FT ; DIAMETER: 4 FT 4 IN A/N:	D86			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
POT, DEETHANIZER WATER DRAIN, V-547, HEIGHT: 6 FT ; DIAMETER: 1 FT 6 IN A/N:	D1273				
DRUM, WATER DRAW-OFF, V-675, LENGTH: 4 FT 8 IN; DIAMETER: 4 FT A/N:	D1275				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
KNOCK OUT POT, VAPOR RECOVERY, V-676, LENGTH: 4 FT 4 IN; DIAMETER: 2 FT A/N:	D1272				
KNOCK OUT POT, V-1100, NAPHTHA, LENGTH: 12 FT 6 IN; DIAMETER: 3 FT A/N:	D912				
TOWER, DEBUTANIZER, V-1547, HEIGHT: 100 FT 6 IN; DIAMETER: 7 FT A/N:	D1280				
COLUMN, DEETHANIZER, V-1548, HEIGHT: 12 FT 6 IN; DIAMETER: 6 FT A/N:	D910				
ACCUMULATOR, V-1549, DEBUTANIZER REFLUX, HEIGHT: 20 FT ; DIAMETER: 7 FT A/N:	D913				
KNOCK OUT POT, V-1789, PROPANE/PROPYLENE, HEIGHT: 8 FT 6 IN; DIAMETER: 24 FT A/N:	D909				
COMPRESSOR, RERUN TOWER GAS, C-43/44, 2 TOTAL, 4 CYLINDERS A/N:	D87				
COMPRESSOR, C-142, WET GAS A/N:	D918				H23.4

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
VESSEL, SEPARATOR, HIGH PRESSURE, V-2343, LENGTH: 22 FT ; DIAMETER: 8 FT A/N:	D1597				
VESSEL, SEPARATOR, SOUR WATER FLASH , V-2344, LENGTH: 25 FT ; DIAMETER: 8 FT 6 IN A/N:	D1598				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N:	D1365			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 2: FCCU CRACKING SECTION					S13.4, S15.2, S15.3, S15.12
FRACTIONATOR, V-386, WITH PRV TO ATMOSPHERE, HEIGHT: 62 FT ; DIAMETER: 16 FT A/N: 470269	D93				
COLUMN, STRIPPER 3, V-387, LIGHT CYCLE GAS OIL, HEIGHT: 18 FT 6 IN; DIAMETER: 3 FT A/N: 470269	D94				
ACCUMULATOR, V-388, FRACTIONATOR REFLUX, HEIGHT: 23 FT ; DIAMETER: 11 FT A/N: 470269	D95			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
HOPPER, FRESH CAT., V-389, HEIGHT: 41 FT 7 IN; DIAMETER: 30 FT A/N: 470269	D1283			PM: (9) [RULE 405, 2-7-1986]	D323.1
HOPPER, USED CAT., V-390, HEIGHT: 41 FT 7 IN; DIAMETER: 30 FT A/N: 470269	D1284			PM: (9) [RULE 405, 2-7-1986]	D323.1

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
COLUMN, STRIPPER, V-494, INTERMEDIATE GAS OIL, HEIGHT: 18 FT 6 IN; DIAMETER: 3 FT A/N: 470269	D1285				
DRUM, FRESH CAT. LOADING, V-822, HEIGHT: 1 FT 8 IN; DIAMETER: 1 FT 6 IN A/N: 470269	D1287			PM: (9) [RULE 405, 2-7-1986]	D323.1
DRUM, CO-LOW NOX PROMOTER LOADING, V-1355, HEIGHT: 1 FT 8 IN; DIAMETER: 1 FT 6 IN A/N: 470269	D1288			PM: (9) [RULE 405, 2-7-1986]	D323.1
DRUM, HOT CHARGE SURGE, V-1364, HEIGHT: 35 FT 6 IN; DIAMETER: 14 FT A/N: 470269	D1289				
KNOCK OUT POT, V-641, CO BOILER FUEL GAS A/N: 470269	D916				
VESSEL, SEPARATOR, INTERMEDIATE, V-1696, (F-160) A/N: 470269	D917				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470269	D1366			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5
System 3: FCCU HEATERS					

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
HEATER, H-2, REFINERY GAS, WITH LOW NOX BURNER, 37.4 MMBTU/HR WITH A/N: 469270 BURNER, 4 BURNERS, REFINERY GAS, WITH LOW NOX BURNER, 37.4 MMBTU/HR	D92		NOX: LARGE SOURCE**; SOX: MAJOR SOURCE**	CO: 400 PPMV (5A) [RULE 1146, 11-17-2000; RULE 1146, 9-5-2008]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 100.6 PPMV (3) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.2, H23.3
HEATER, H-3, REFINERY GAS, 94.7 MMBTU/HR WITH A/N: 470270 BURNER, REFINERY GAS, JOHN ZINK, MODEL HEVD-14, WITH LOW NOX BURNER, 52 TOTAL; 94.7 MMBTU/HR	D89	S50	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 0.1 LBS/MMBTU (5) [CONSENT DECREE, 3-21-2001]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A229.1, B61.1, D90.7, D328.1, H23.3

* (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
HEATER, H-4, REFINERY GAS, 127.2 MMBTU/HR WITH A/N: 470271 BURNER, REFINERY GAS, JOHN ZINK, MODEL HEVD-14, WITH LOW NOX BURNER, 72 TOTAL; 127.2 MMBTU/HR	D90	S50	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 0.1 LBS/MMBTU (5) [CONSENT DECREE, 3-21-2001]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A229.1, B61.1, D90.7, D328.1, H23.3
STACK A/N: 470271	S50	D89 D90			
HEATER, H-5, REFINERY GAS, 44 MMBTU/HR A/N: 469272	D91		NOX: LARGE SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 83.8 PPMV REFINERY GAS (3) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, C1.15, D90.7, D328.1, E313.1, E315.1, H23.3
HEATER, START UP, B-1, NATURAL GAS, 84 MMBTU/HR A/N: 473467	D1664		NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	
System 4: FCCU NAPHTHA TREATING					S13.4, S15.3
VESSEL, SEPARATOR, PHASE, V-1832, HEIGHT: 24 FT ; DIAMETER: 6 FT 6 IN A/N: 469275	D99				
VESSEL, SEPARATOR, PHASE, V-1833, HEIGHT: 24 FT ; DIAMETER: 5 FT 6 IN A/N: 469275	D100				

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
POT, V-1835, FILM FIBER CONTACTOR, HEIGHT: 14 FT 6 IN; DIAMETER: 3 FT A/N: 469275	D104				
POT, V-1836, FILM-FIBER CONTACTOR, HEIGHT: 14 FT 6 IN; DIAMETER: 3 FT A/N: 469275	D105				
TANK, INHIBITOR, T-165, HEIGHT: 8 FT 6 IN; DIAMETER: 5 FT A/N: 469275	D1292				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469275	D1443			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5
System 5: FCCU GAS TREATING					S13.4, S15.2, S18.5
SCRUBBER, H2S GAS, V-1680, LENGTH: 15 FT ; DIAMETER: 3 FT A/N: 469276	D1293				
KNOCK OUT POT, V-278, HEIGHT: 6 FT ; DIAMETER: 3 FT A/N: 469276	D1294				
ABSORBER, PROPYLENE, V-1681, HEIGHT: 65 FT 6 IN; DIAMETER: 2 FT 6 IN A/N: 469276	D1295				
ABSORBER, H2S, V-1672, HEIGHT: 65 FT 6 IN; DIAMETER: 2 FT 6 IN A/N: 469276	D1296				
KNOCK OUT POT, V-569, NAPHTHA, HEIGHT: 13 FT ; DIAMETER: 3 FT A/N: 469276	D107				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
SCRUBBER, H2S GAS, V-1100, LENGTH: 15 FT ; DIAMETER: 3 FT A/N: 469276	D1297				
VESSEL, COALESCER, V-1551, PROPYLENE, HEIGHT: 7 FT ; DIAMETER: 2 FT A/N: 469276	D103				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469276	D1444			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5
System 6: FCCU AIR POLLUTION CONTROL					S42.1
ELECTROSTATIC PRECIPITATOR, #3, SINGLE STAGE, ONE(1) CHAMBER, WITH 8 TRANSFORMER/RECTIFIER SETS, HAMON RESEARCH-COTTREL, 54 KVA WITH A/N: 470273 HOPPER, CATALYST FINES, 4 TOTAL BIN, HOLDING, CATALYST FINES, 1 TOTAL AMMONIA INJECTION, GRID	C1575	S51 D96 D112 S1105		NH3: 10 PPMV (5) [RULE 1105.1, 11-7-2003]	A195.2, C12.2, D29.8, D90.11, D90.12, D90.13, D90.14, D90.15, D323.3, E73.2, E193.3, E193.4

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
ELECTROSTATIC PRECIPITATOR, #4, SINGLE STAGE, ONE(1) CHAMBER, WITH 8 TRANSFORMER/RECTIFIER SETS, HAMON RESEARCH-COTTREL, 54 KVA WITH A/N: 470273 HOPPER, CATALYST FINES, 4 TOTAL BIN, HOLDING, CATALYST FINES, 1 TOTAL AMMONIA INJECTION, GRID	C1576	S51 D96 D112 S1105		NH3: 10 PPMV (5) [RULE 1105.1, 11-7-2003]	A195.2, D12.2, D29.8, D90.11, D90.12, D90.13, D90.14, D90.15, D323.3, E73.2, E193.3, E193.4

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
ELECTROSTATIC PRECIPITATOR, #5, SINGLE STAGE, ONE(1) CHAMBER, WITH 8 TRANSFORMER/RECTIFIER SETS, MODEL HAMON RESEARCH-COTTREL, 54 KVA WITH A/N: 470273 HOPPER, CATALYST FINES, 4 TOTAL BIN, HOLDING, CATALYST FINES, 1 TOTAL AMMONIA INJECTION, GRID	C1577	S51 D96 D112 S1105		NH3: 10 PPMV (5) [RULE 1105.1, 11-7-2003]	A195.2, C12.2, D29.8, D90.11, D90.12, D90.13, D90.14, D90.15, D323.3, E73.2, E193.3, E193.4
HEAT EXCHANGER, CATALYST FINES A/N: 470273	D1580				
STACK A/N: 470273	S51	D112 C1575 C1576 C1577			
STACK, BY-PASS A/N: 470273	S1105	C1575 C1576 C1577			
System 8: FCCU CATALYST ADDITIVE LOADER					
VESSEL, CATALYST, V-2340, GRACE DAVISON, 6 CUFT VOLUME, LENGTH: 2 FT 3 IN; DIAMETER: 2 FT A/N: 469277	D1573			PM: (9) [RULE 404, 2-7-1986; RULE 405, 2-7-1986]	B27.1, E71.13

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
FILTER, DUST COLLECTOR, V-2342, WITH 2 FILTER CATRIDGE, 590 SQUARE FEET FILTER AREA, WITH AUTOMATIC AIR PULSE CLEANING AFTER EACH INJECTION A/N: 469277	C1574				C6.3, D322.2, D323.1, E102.1, K67.18
System 9: FCCU BOILER					
BOILER, BO-1, CO WASTE HEAT, REFINERY GAS, WITH LOW NOX BURNER, 300 MMBTU/HR WITH A/N: 470272 BURNER, REFINERY GAS, BABCOCK WILCOX, WITH LOW NOX BURNER, 6 TOTAL; 300 MMBTU/HR	D112	S51 C1575 C1576 C1577	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.1, H23.3
Process 4: HYDROTREATING					P13.1
System 1: HYDROTREATING UNIT NO. 1					S13.4, S15.2, S15.3, S15.13, S31.1
SCRUBBER, DEA, V-598, RERUN ACCUMULATOR OFF-GAS, HEIGHT: 10 FT 8 IN; DIAMETER: 8 FT A/N: 539333	D1180				
TOWER, DEGUMMER, V-619, HEIGHT: 27 FT ; DIAMETER: 5 FT A/N: 539333	D1182				
TOWER, RERUN, V-621, HEIGHT: 55 FT ; DIAMETER: 5 FT A/N: 539333	D1183				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
TANK, SURGE, V-2240, LENGTH: 24 FT ; DIAMETER: 8 FT A/N: 539333	D1508				
VESSEL, SEPARATOR, HIGH PRESSURE, V-622, HEIGHT: 16 FT 6 IN; DIAMETER: 6 FT WITH A/N: 539333 POT, SEPARATOR, H2S-WATER, HEIGHT: 2 FT ; DIAMETER: 8 IN	D115				
COLUMN, STRIPPER, V-620, HEIGHT: 57 FT ; DIAMETER: 4 FT A/N: 539333	D114				
REACTOR, FC-201 (V-626), HEIGHT: 24 FT ; DIAMETER: 7 FT 6 IN A/N: 539333	D1351				
VESSEL, V-2270, NAPHTHA FEED COALESCER, LENGTH: 14 FT ; DIAMETER: 54 FT A/N: 539333	D1510				
ACCUMULATOR, STRIPPER, V-2367, HEIGHT: 7 FT ; DIAMETER: 3 FT WITH A/N: 539333 POT, SEPARATOR, H2S-WATER, HEIGHT: 2 FT 7 IN; DIAMETER: 8 IN	D1184				
ACCUMULATOR, V-624, TOWER RERUN, HEIGHT: 12 FT ; DIAMETER: 4 FT A/N: 539333	D117				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
POT, V-1137/V-2012, SOUR WATER DRAW OFF A/N: 539333	D1332				
DRUM, DECOKING QUENCH, V-625, HEIGHT: 10 FT ; DIAMETER: 3 FT A/N: 539333	D1343	D194 D216 D217			
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 539333	D1446			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 2: HYDROTREATING UNIT NO. 1 HEATERS					
HEATER, H-31, REFINERY GAS, WITH LOW NOX BURNER, FLUE GAS RECIRCULATION, 45 MMBTU/HR WITH A/N: 469279 BURNER, REFINERY GAS, WITH LOW NOX BURNER, 45 MMBTU/HR	D120		NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.1, H23.3
System 3: HYDROTREATING UNIT NO. 2					S11.2, S13.4, S15.2, S15.3, S15.13, S31.1
REACTOR, HYDROTREATER REACTOR NO. 1, V-724, HEIGHT: 21 FT 9 IN; DIAMETER: 7 FT 6 IN A/N: 470276	D121				
COLUMN, H2S STRIPPER, V-726, H2S, HEIGHT: 49 FT ; DIAMETER: 6 FT A/N: 470276	D130				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
ACCUMULATOR, V-727, STRIPPER OVERHEAD, HEIGHT: 12 FT ; DIAMETER: 3 FT 6 IN A/N: 470276	D131				
DRUM, INHIBITOR BLENDING, V-729, HEIGHT: 5 FT ; DIAMETER: 3 FT 6 IN A/N: 470276	D122				
REACTOR, 1ST STAGE MAIN, V-2237, LENGTH: 20 FT 3 IN; DIAMETER: 9 FT 6 IN A/N: 470276	D1511				
VESSEL, PRETREAT REACTOR, V-2143, LENGTH: 28 FT 6 IN; DIAMETER: 8 FT A/N: 470276	D1512				
TOWER, STRIPPER, V-2238, HEIGHT: 20 FT 9 IN; DIAMETER: 6 FT 6 IN A/N: 470276	D1513				
REACTOR, 2ND STAGE MAIN, V-740, HEIGHT: 21 FT 9 IN; DIAMETER: 7 FT 6 IN A/N: 470276	D123				
VESSEL, HIGH PRESSURE SEPARATOR, V-725, HEIGHT: 20 FT 9 IN; DIAMETER: 6 FT 6 IN A/N: 470276	D129				
DRUM, CHARGE, V-1474, NAPHTHA, HEIGHT: 30 FT ; DIAMETER: 12 FT A/N: 470276	D134				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
COMPRESSOR, RECIPROCATING, C-72, HYDROTREATER BOOSTER/RECYCLE GAS A/N: 470276	D140				H23.4
SCRUBBER, V-812, SEP GAS, LENGTH: 4 FT 4 IN; DIAMETER: 1 FT 6 IN A/N: 470276	D1187				
DRUM, LIQUID RECEIVER, V-814, LENGTH: 3 FT ; DIAMETER: 1 FT A/N: 470276	D1188				
VESSEL, DEGASSING, V-728, HEIGHT: 7 FT ; DIAMETER: 3 FT A/N: 470276	D132				
DRUM, DECOKING QUENCH, V-15 A/N: 470276	D1333	D194 D216 D217			
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470276	D1447			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 4: HYDROTREATING UNIT NO. 2 HEATERS					
HEATER, H-500, REFINERY GAS, 69 MMBTU/HR A/N: 469913	D146		NOX: MAJOR SOURCE**, SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.1, H23.3
System 5: HYDROTREATING UNIT NO. 3					S13.4, S15.2, S15.3, S15.13
VESSEL, SEPARATOR, HIGH PRESSURE, V-767, HEIGHT: 71 FT ; DIAMETER: 6 FT 6 IN A/N: 469915	D147				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
DRUM, V-773, SOUR WATER, LENGTH: 26 FT 6 IN; DIAMETER: 4 FT 6 IN A/N: 469915	D159				
DRUM, SURGE, V-774, CONDENSATE, HEIGHT: 9 FT 6 IN; DIAMETER: 3 FT 6 IN A/N: 469915	D148				
REACTOR, V-768/769, 2 TOTAL, HEIGHT: 28 FT ; DIAMETER: 7 FT A/N: 469915	D1189				
VESSEL, SEPARATOR, LOW PRESSURE, V-770, HEIGHT: 25 FT 6 IN; DIAMETER: 4 FT 6 IN A/N: 469915	D149				
VESSEL, FILTER, AVJET, V-1507, HEIGHT: 15 FT ; DIAMETER: 12 FT A/N: 469915	D1668				
VESSEL, SEPARATOR, AVJET, V1508/1509, 2 TOTAL, HEIGHT: 6 FT 9 IN; DIAMETER: 12 FT .75 IN A/N: 469915	D1669				
ACCUMULATOR, V-771, H2S STRIPPER OVERHEAD, LENGTH: 26 FT 6 IN; DIAMETER: 2 FT 6 IN A/N: 469915	D1191				
DRUM, CHARGE, V-1471, DIESEL, HEIGHT: 17 FT 6 IN; DIAMETER: 8 FT 6 IN A/N: 469915	D153				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
COLUMN, STRIPPER, V-1475, H2S, HEIGHT: 86 FT 6 IN; DIAMETER: 7 FT A/N: 469915	D155				
COMPRESSOR, C-86, RECYCLE GAS A/N: 469915	D1194				H23.4
COMPRESSOR, C-77, MAKEUP GAS A/N: 469915	D156				H23.4
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469915	D1448			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 6: HYDROTREATING UNIT NO. 3 HEATERS					
HEATER, H-30, REFINERY GAS, WITH LOW NOX BURNER, 48.6 MMBTU/HR WITH A/N: 469917 BURNER, 8 BURNER, REFINERY GAS, WITH LOW NOX BURNER, 48.6 MMBTU/HR	D157		NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, H23.3
HEATER, H-21/H-22, REFINERY GAS, 203.8 MMBTU/HR A/N: 469919	D158		NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, H23.3
System 7: FCCU FEED HYDRODESULFURIZATION UNIT NO. 4					S11.2, S13.2, S13.4, S15.2, S15.3, S15.10, S31.1
REACTOR, GUARD, V-1740, HEIGHT: 21 FT 11 IN; DIAMETER: 12 FT 7 IN A/N: 470277	D1195				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
REACTOR, V-1741, HEIGHT: 31 FT 11 IN; DIAMETER: 12 FT 7 IN A/N: 470277	D1326				
COLUMN, H2S STRIPPER, V-1755, HEIGHT: 59 FT 6 IN; DIAMETER: 10 FT 6 IN A/N: 470277	D160				
FRACTIONATOR, V-1757, HEIGHT: 70 FT 6 IN; DIAMETER: 8 FT 6 IN A/N: 470277	D168				
COLUMN, STRIPPER, V-867, DIESEL, HEIGHT: 22 FT 8 IN; DIAMETER: 3 FT 6 IN A/N: 470277	D244				
VESSEL, DRIER, V-1374, DIESEL PRODUCT, HEIGHT: 36 FT 6 IN; DIAMETER: 9 FT A/N: 470277	D3				
ABSORBER, AMINE, V-1759, HEIGHT: 49 FT 9 IN; DIAMETER: 2 FT A/N: 470277	D161				
ABSORBER, AMINE, V-1761, HEIGHT: 58 FT ; DIAMETER: 4 FT A/N: 470277	D162				
DRUM, SURGE, V-1751, FEED, HEIGHT: 43 FT ; DIAMETER: 13 FT 6 IN A/N: 470277	D163				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
ABSORBER, AMINE/COLD HIGH PRESSURE SEPARATOR, V-2231, HEIGHT: 42 FT ; DIAMETER: 4 FT 7 IN A/N: 470277	D164				
DRUM, FLASH, RICH AMINE, V-2234, HEIGHT: 15 FT 6 IN; DIAMETER: 5 FT 6 IN A/N: 470277	D1503				
VESSEL, SEPARATOR, LOW PRESSURE, V-1753, HEIGHT: 30 FT 6 IN; DIAMETER: 8 FT 10 IN A/N: 470277	D165				
DRUM, V-1816, WWS REBOILER CONDENSATE A/N: 470277	D1334				
DRUM, V-1684, OFFGAS DCU CONDITIONER A/N: 470277	D1335				
ACCUMULATOR, V-2161, STRIPPER OVERHEAD A/N: 470277	D106				
ACCUMULATOR, V-1758, FRACTIONATOR OVERHEAD, HEIGHT: 12 FT ; DIAMETER: 4 FT 6 IN A/N: 470277	D167			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
KNOCK OUT POT, V-1760, AMINE ABSORBER FEED, HEIGHT: 10 FT ; DIAMETER: 3 FT A/N: 470277	D169				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
KNOCK OUT POT, V-1762, AMINE ABSORBER OVERHEAD, HEIGHT: 10 FT ; DIAMETER: 3 FT A/N: 470277	D170				
DRUM, V-1765, WASH WATER, LENGTH: 13 FT 6 IN; DIAMETER: 5 FT 6 IN A/N: 470277	D173				
DRUM, FLASH, V-1766, SOUR WATER, HEIGHT: 17 FT ; DIAMETER: 5 FT 6 IN A/N: 470277	D174				
DRUM, V-1815, WWS CONDENSATE A/N: 470277	D1336				
COMPRESSOR, C-134, RECYCLE GAS, 3000 HP A/N: 470277	D176				H23.4
VESSEL, SEPARATOR, V-2049, HOT HIGH PRESSURE, HEIGHT: 18 FT ; DIAMETER: 7 FT 6 IN A/N: 470277	D1112				
DRUM, V-1814, WWS, HEIGHT: 30 FT 9 IN; DIAMETER: 12 FT A/N: 470277	D502				
COLUMN, STRIPPER, V-2350, WASH WATER A/N: 470277	D188				
FILTER, FEED, V-1808/09, 2 TOTAL, HEIGHT: 6 FT 9 IN; DIAMETER: 3 FT 6 IN A/N: 470277	D1566				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 4: HYDROTREATING					P13.1
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470277	D1449			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 8: FCCU FEED HYDRODESULFURIZATION UNIT NO. 4 HEATERS					
HEATER, H-41, REFINERY GAS, WITH LOW NOX BURNER, 63.2 MMBTU/HR WITH A/N: 469929 BURNER, REFINERY GAS, WITH LOW NOX BURNER, 63.2 MMBTU/HR	D770	C771	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 12 PPMV (4) [RULE 2005, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.1, E54.7, H23.3
SELECTIVE CATALYTIC REDUCTION, HALDOR TOPSOE DNX 930, FIXED BED REACTOR, VANADIA-TITANIA CATALYST, PLATE TYPE, 144.8 CU.FT. WITH A/N: 469930 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C771	D770 S989		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, D29.7, E71.7
STACK A/N: 469930	S989	C771			
System 9: FUEL GAS TREATING SYSTEM					S13.4, S15.2, S18.4
TOWER, V-598, GAS WASH, HEIGHT: 69 FT ; DIAMETER: 5 FT A/N: 472874	D192				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 472874	D1380				H23.16

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
System 1: BENSAT					S13.4, S15.2, S15.3, S31.1
DRUM, SURGE, V-2070, FEED A/N: 470280	D976				
VESSEL, V-606, SULFUR GUARD BED, HEIGHT: 12 FT ; DIAMETER: 5 FT A/N: 470280	D977				
REACTOR, V-607, HEIGHT: 24 FT ; DIAMETER: 5 FT A/N: 470280	D1061				
GAS SEPARATOR, V-611, REACTOR EFFLUENT A/N: 470280	D979				
COLUMN, STABILIZER, V-595 A/N: 470280	D980				
ACCUMULATOR, STABILIZER, V-608, HEIGHT: 18 FT ; DIAMETER: 3 FT 6 IN A/N: 470280	D1071				
POT, V-1999, STABILIZER REBOILER CONDENSATE, HEIGHT: 4 FT 11 IN; DIAMETER: 2 FT A/N: 470280	D1337				
COMPRESSOR, C-152, H2 MAKE-UP A/N: 470280	D1338				H23.4
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470280	D1381			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 2: CATALYTIC REFORMING UNIT NO. 1 HEATERS					

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
HEATER, H-11, PROCESS GAS, WITH LOW NOX BURNER, 81 MMBTU/HR WITH A/N: 469957 BURNER, REFINERY GAS, JOHN ZINK, PSFPG-30, WITH LOW NOX BURNER, 81 MMBTU/HR	D194	D1333 D1343	NOX: LARGE SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 83.8 PPMV (3) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, C1.15, D90.7, D328.1, E313.1, E315.1, H23.3
HEATER, H-20, REFINERY GAS, WITH LOW NOX BURNER, 76.8 MMBTU/HR WITH A/N: 469958 BURNER, REFINERY GAS, JOHN ZINK, PSFPG-30A AND PSFPG-10A, WITH LOW NOX BURNER, 76.8 MMBTU/HR	D196		NOX: LARGE SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 83.8 PPMV (3) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, C1.15, D90.7, D328.1, E313.1, E315.1, H23.3
System 3: CATALYTIC REFORMING UNIT NO. 2					S13.4, S15.2, S15.3, S31.1
REACTOR, NO. 1, V-735, HEIGHT: 14 FT ; DIAMETER: 12 FT 6 IN A/N: 470283	D1197			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	
REACTOR, NO. 2, V-736, HEIGHT: 21 FT ; DIAMETER: 12 FT 6 IN A/N: 470283	D1198			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	
REACTOR, NO. 3A, V-737, HEIGHT: 20 FT ; DIAMETER: 12 FT 6 IN A/N: 470283	D1199			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
REACTOR, NO. 3B, V-738, HEIGHT: 14 FT ; DIAMETER: 12 FT 6 IN A/N: 470283	D1200			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	
VESSEL, SEPARATOR, V-739, REACTOR PRODUCT, LENGTH: 24 FT ; DIAMETER: 9 FT 6 IN A/N: 470283	D197				
COLUMN, DEBUTANIZER, V-741, HEIGHT: 75 FT ; DIAMETER: 7 FT A/N: 470283	D198				
VESSEL, RECEIVER, V-742, DEBUTANIZER PRODUCT, LENGTH: 20 FT ; DIAMETER: 5 FT A/N: 470283	D199				
COLUMN, SPLITTER, V-743, HEIGHT: 72 FT 6 IN; DIAMETER: 8 FT A/N: 470283	D200				
VESSEL, RECEIVER, V-744, SPLITTER PRODUCT, LENGTH: 20 FT ; DIAMETER: 5 FT A/N: 470283	D201				
DRUM, HALIDE, V-746/747, 2 TOTAL, INJECTION CHEMICAL, HEIGHT: 5 FT ; DIAMETER: 1 FT 6 IN A/N: 470283	D203				
TANK, PERCHLOROETHYLENE, 300 GALS; WIDTH: 4 FT ; HEIGHT: 3 FT 6 IN; LENGTH: 3 FT 6 IN A/N: 470283	D1120				C1.2, D90.19

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
DRUM, SURGE, V-2071, FEED PREP, HEAVY NAPHTHA, HEIGHT: 15 FT ; DIAMETER: 6 FT A/N: 470283	D1203				
VESSEL, V-2235, SULFUR GUARD BED, HEIGHT: 17 FT ; DIAMETER: 6 FT 5 IN A/N: 470283	D1501				
TOWER, FEED PREP, V-732, HEIGHT: 87 FT ; DIAMETER: 13 FT A/N: 470283	D1204				
TOWER, SIDE SPLITTER, V-733, HEIGHT: 29 FT ; DIAMETER: 6 FT A/N: 470283	D1205				
POT, V-1992, SPLITTER REBOILER CONDENSATE, HEIGHT: 6 FT ; DIAMETER: 3 FT A/N: 470283	D1206				
DRUM, V-2005, SPLITTER WATER DRAW, HEIGHT: 5 FT ; DIAMETER: 1 FT 6 IN A/N: 470283	D1207				
COMPRESSOR, C-73, RECYCLE GAS, CENTRIFUGAL, (VH-504) A/N: 470283	D209				
ACCUMULATOR, V-734, FEED PREP OVERHEAD, HEIGHT: 37 FT ; DIAMETER: 7 FT A/N: 470283	D210				
ABSORBER, CARBON, V-2277, HYDROGEN CHLORIDE, DIAMETER: 5 FT 6 IN; HEIGHT: 18 FT A/N: 470284	D1525			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
KNOCK OUT POT, RECYCLE GAS CONDENSATE, V-2276; DIAMETER: 3 FT 6 IN; HEIGHT: 8 FT 6 IN A/N: 470284	D1526				
HEAT EXCHANGER, NET GAS RECYCLE COOLING, E-1858, 2.2 MMBTU/HR DUTY A/N: 470284	D1527				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470283	D1451			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 4: CATALYTIC REFORMING UNIT NO. 2 HEATERS					
HEATER, H-510, REFINERY GAS, WITH LOW NOX BURNER, 60 MMBTU/HR WITH A/N: 469960 BURNER, 6 BURNERS, REFINERY GAS, WITH LOW NOX BURNER, 60 MMBTU/HR	D218		NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.1, H23.3
HEATER, H-501A, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 31.4 MMBTU/HR WITH A/N: 470285 BURNER, SIX BURNERS, JOHN ZINK MODEL NO. LM-116, REFINERY GAS, WITH LOW NOX BURNER, 31.4 MMBTU/HR	D216	C773 S990 D1333 D1343	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 400 PPMV (5A) [RULE 1146, 11-17-2000; RULE 1146, 9-5-2008]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.2, E448.1, H23.3

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
HEATER, H-501B, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 31.4 MMBTU/HR WITH A/N: 470286 BURNER, SIX BURNERS, JOHN ZINK MODEL NO. LM-116, REFINERY GAS, WITH LOW NOX BURNER, 31.4 MMBTU/HR	D217	C773 S990 D1333 D1343	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 400 PPMV (5A) [RULE 1146, 11-17-2000; RULE 1146, 9-5-2008]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.2, E448.1, H23.3
HEATER, H-502, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 55.8 MMBTU/HR WITH A/N: 469962 BURNER, REFINERY GAS, WITH LOW NOX BURNER, 55.8 MMBTU/HR	D214	C773 S990	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.1, E448.1, H23.3
HEATER, H-503/504, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 36.1 MMBTU/HR WITH A/N: 469964 BURNER, REFINERY GAS, WITH LOW NOX BURNER, 36.1 MMBTU/HR	D215	C773 S990	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 400 PPMV (5A) [RULE 1146, 11-17-2000; RULE 1146, 9-5-2008]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D328.2, E448.1, H23.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
SELECTIVE CATALYTIC REDUCTION, HALDOR TOPSOE DNX 930, FIXED BED REACTOR, VANADIA-TITANIA CATALYST HONEYCOMB TYPE, 78 CU.FT. WITH A/N: 469966 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C773	D214 D215 D216 D217 S990		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, D29.7, E71.7
STACK A/N: 469966	S990	D214 D215 D216 D217 C773			
System 5: CATALYTIC REFORMING UNIT NO. 3					S13.4, S15.2, S15.3, S31.1
DRUM, SURGE, V-855, PLATFORMER CHARGE, LENGTH: 30 FT ; DIAMETER: 10 FT A/N: 470287	D219				
REACTOR, NO. 1, V-856, HEIGHT: 21 FT ; DIAMETER: 7 FT A/N: 470287	D1208			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	
REACTOR, NO. 2, V-857, HEIGHT: 21 FT 6 IN; DIAMETER: 8 FT A/N: 470287	D1209			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	
REACTOR, NO. 3, V-858, HEIGHT: 21 FT 6 IN; DIAMETER: 9 FT A/N: 470287	D1210			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	
VESSEL, SEPARATOR, V-859, REACTOR PRODUCT, HEIGHT: 18 FT ; DIAMETER: 8 FT A/N: 470287	D220				

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
DRUM, FLASH, V-861, HEIGHT: 16 FT ; DIAMETER: 7 FT A/N: 470287	D221				
COLUMN, DEBUTANIZER, V-862, HEIGHT: 89 FT ; DIAMETER: 10 FT 6 IN A/N: 470287	D222				
VESSEL, RECEIVER, V-863, DEBUTANIZER PRODUCT, LENGTH: 20 FT ; DIAMETER: 6 FT A/N: 470287	D223				
COLUMN, DEPROPANIZER, V-864, HEIGHT: 92 FT ; DIAMETER: 4 FT A/N: 470287	D224				
VESSEL, RECEIVER, V-865, DEPROPANIZER PRODUCT, HEIGHT: 16 FT ; DIAMETER: 4 FT 6 IN A/N: 470287	D225				
COLUMN, DEPENTANIZER, V-866, HEIGHT: 98 FT ; DIAMETER: 10 FT A/N: 470287	D226				
VESSEL, DEPENTANIZER COLUMN RECEIVER, V-868, LENGTH: 20 FT ; DIAMETER: 8 FT A/N: 470287	D227			HAP: (10) [40CFR 63 Subpart CC, #1, 6-23-2003]	
TANK, PERCHLOROETHYLENE, 300 GALS; WIDTH: 4 FT ; HEIGHT: 3 FT 6 IN; LENGTH: 3 FT 6 IN A/N: 469967	D1121				C1.2, D90.19

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
DRUM, CHEMICAL INJECTION, V-870, HEIGHT: 4 FT ; DIAMETER: 1 FT A/N: 470287	D1212				
ABSORBER, CHLORIDE, V-1485, HEIGHT: 20 FT ; DIAMETER: 6 FT A/N: 470287	D1213			HAP: (10) [40CFR 63 Subpart UUU, #1, 4-20-2006]	
COMPRESSOR, C-89, RECYCLE GAS A/N: 470287	D229				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470287	D1384			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 6: CATALYTIC REFORMING UNIT NO. 3 HEATERS					
HEATER, H-200, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 82.2 MMBTU/HR WITH A/N: 469970 BURNER, REFINERY GAS, WITH LOW NOX BURNER, 82.2 MMBTU/HR	D247	C775 S992	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, E54.6, E54.16, H23.3
HEATER, H-201, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 49.9 MMBTU/HR WITH A/N: 469974 BURNER, REFINERY GAS, WITH LOW NOX BURNER, 49.9 MMBTU/HR	D248	C775 S992	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, E54.6, E54.16, H23.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
HEATER, H-202, REFINERY GAS, WITH LOW NOX BURNER, AIR PREHEATING, 28.5 MMBTU/HR WITH A/N: 469976 BURNER, REFINERY GAS, MCGILL, MODEL PSRGR-7, WITH LOW NOX BURNER, 28.5 MMBTU/HR	D249	C775 S992	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 400 PPMV (5A) [RULE 1146, 11-17-2000; RULE 1146, 9-5-2008]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.2, E54.6, E54.16, H23.3
SELECTIVE CATALYTIC REDUCTION, HALDOR TOPSOE DNX 940, FIXED BED REACTOR, VANADIA-TITANIA CATALYST, HONEYCOMB TYPE, 128 CU.FT. WITH A/N: 469985 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C775	D247 D248 D249 S992		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, D29.7, E71.7
STACK A/N: 469985	S992	D247 D248 D249 C775			

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 5: CATALYTIC REFORMING					P13.1
HEATER, H-203, REFINERY GAS, WITH LOW NOX BURNER, 35 MMBTU/HR WITH A/N: 469986 BURNER, REFINERY GAS, JOHN ZINK, MODEL PNDR-20M, WITH LOW NOX BURNER, 35 MMBTU/HR	D250		NOX: MAJOR SOURCE**, SOX: MAJOR SOURCE**	CO: 400 PPMV (5A) [RULE 1146, 11-17-2000; RULE 1146, 9-5-2008]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.2, H23.3
HEATER, H-204, REFINERY GAS, 69 MMBTU/HR WITH A/N: 509650 BURNER, REFINERY GAS, JOHN ZINK, MODEL SMR-20, 4 TOTAL, WITH LOW NOX BURNER, 69 MMBTU/HR	D251		NOX: MAJOR SOURCE**, SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 41.6 PPMV REFINERY GAS (3) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B59.1, B61.1, D90.7, D328.1, E313.1, E315.1, H23.3
Process 6: HYDROGEN GENERATION					P13.1
System 1: HYDROGEN GENERATION UNIT NO. 1					S2.1, S13.4, S15.2, S15.3, S31.1
TANK, CONDENSATE, TK-7203, HEIGHT: 32 FT ; DIAMETER: 42 FT A/N: 470288	D1217				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 6: HYDROGEN GENERATION					P13.1
COLUMN, WASHING/STRIPPING, V-1042, HEIGHT: 68 FT ; DIAMETER: 7 FT 6 IN A/N: 470288	D276				
COMPRESSOR, C-82 A/N: 470288	D922				H23.16
COMPRESSOR, C-83, DCU OFF GAS A/N: 470288	D923				H23.16
COMPRESSOR, C-84/85, HYDROGEN, 2 TOTAL A/N: 470288	D305				
SCRUBBER, V-987, COPPER LIQUOR, HEIGHT: 96 FT ; DIAMETER: 5 FT A/N: 470288	D307				
KNOCK OUT POT, V-1969, HEIGHT: 7 FT ; DIAMETER: 4 FT A/N: 470288	D780				
SCRUBBER, V-1890, AMMONIA, HEIGHT: 8 FT ; DIAMETER: 6 FT A/N: 470288	D781				
System 3: HYDROGEN GENERATION UNIT NO. 2					S2.1, S13.2, S13.4, S15.2
ABSORBER, PSA, V-1769/78, 10 TOTAL A/N: 469989	D317				
VESSEL, SEPARATOR, V-1782, PROCESS CONDENSATE A/N: 469989	D319				
REACTOR, DESULFURIZATION, V-1783 A/N: 469989	D320				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 6: HYDROGEN GENERATION					P13.1
REACTOR, ZINC OXIDE, V-1784/1785, 2 TOTAL A/N: 469989	D321				
REACTOR, HIGH TEMP/SHIFT, V-1786 A/N: 469989	D323				
DRUM, BLOWDOWN FLASH, V-1787 A/N: 469989	D1255				
DRUM, CONDENSATE DEGASER, V-1795 A/N: 469989	D1256				
COMPRESSOR, C-146/147, FEED GAS, 2 TOTAL, EACH 400 HP A/N: 469989	D333				H23.4
COMPRESSOR, C-148, HYDROGEN PRODUCT, 1750 HP A/N: 469989	D335				
FILTER, V-1845/1846, FEED GAS COMP DUPLEX A/N: 469989	D1257				
FILTER, V-1847, HYDROGEN PRODUCT COMP DUPLEX A/N: 469989	D1258				
DRUM, PURGE GAS SURGE, V-1779 A/N: 469989	D1339				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 469989	D1453				H23.16
System 4: HYDROGEN GENERATION UNIT NO. 2 HEATERS					

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 6: HYDROGEN GENERATION					P13.1
FURNACE, H-42, PSA GAS, REFINERY GAS, STEAM METHANE REFORMER FURNACE, 145.97 MMBTU/HR WITH A/N: 469990 GENERATOR, ELECTRICITY, STEAM TURBINE, 22.85 MW HEATER, CC-2, MIXED FEED PREHEATER HEATER, CC-3, STEAM SUPERHEATER	D777	C778	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 12 PPMV (4) [RULE 2005, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D90.16, D328.1, E54.8, H23.3
SELECTIVE CATALYTIC REDUCTION, CORMETECH, W/A FIXED BED REACTOR, VANADIA-TITANIA CATALYST, 325 CU.FT. WITH A/N: 469991 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C778	D777 S993 D1122		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, D29.7, E71.7

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 6: HYDROGEN GENERATION					P13.1
BOILER, H-43, AUXILIARY, NATURAL GAS, REFINERY GAS, 139.5 MMBTU/HR WITH A/N: 469992 BURNER, NATURAL GAS, REFINERY GAS, COEN, MODEL 675, 139.5 MMBTU/HR, AND 4 JOHN ZINK TRIM BRNRS, EA 9.4 MMBTU/HR, WITH LOW NOX BURNER, 139.5 MMBTU/HR	D1122	C778	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 0.1 LBS/MMBTU (8) [40CFR 60 Subpart Db, 1-28-2009]; NOX: 12 PPMV (4) [RULE 2005, 5-6-2005]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, D90.7, D90.16, D328.1, E54.10, H23.29
STACK A/N: 469993	S993	C778			
Process 8: HYDROCRACKING					P13.1
System 1: HYDROCRACKING UNIT					S13.4, S15.2, S15.3, S15.10, S31.1
REACTOR, V-993, HEIGHT: 58 FT 3 IN; DIAMETER: 10 FT A/N: 493279	D371				
REACTOR, V-994, HEIGHT: 68 FT 10 IN; DIAMETER: 10 FT A/N: 493279	D372				
REACTOR, V-995, HEIGHT: 74 FT 10 IN; DIAMETER: 8 FT 6 IN A/N: 493279	D373				
DRUM, SURGE, V-996, HEIGHT: 28 FT ; DIAMETER: 11 FT 6 IN A/N: 493279	D340				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
VESSEL, SEPARATOR, HIGH PRESSURE, V-997, HEIGHT: 34 FT ; DIAMETER: 10 FT A/N: 493279	D341				
VESSEL, SEPARATOR, LOW PRESSURE, V-998, HEIGHT: 26 FT ; DIAMETER: 7 FT 6 IN A/N: 493279	D342				
FRACTIONATOR, V-1001, HEIGHT: 144 FT ; DIAMETER: 15 FT A/N: 493279	D344				
VESSEL, STRIPPER, V-1002, HEAVY NAPHTHA, HEIGHT: 33 FT 6 IN; DIAMETER: 6 FT A/N: 493279	D345				
VESSEL, STRIPPER, V-1003, MEDIUM NAPHTHA, HEIGHT: 31 FT 6 IN; DIAMETER: 6 FT A/N: 493279	D1259				
ACCUMULATOR, V-1004, FRACTIONATOR REFLUX, LENGTH: 22 FT 6 IN; DIAMETER: 9 FT A/N: 493279	D1260				
ACCUMULATOR, V-1005, FRACTIONATOR OVERHEAD, LENGTH: 18 FT ; DIAMETER: 7 FT A/N: 493279	D346			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
ABSORBER, V-1006, LEAN OIL, HEIGHT: 50 FT ; DIAMETER: 3 FT A/N: 493279	D374				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
COLUMN, DEPROPANIZER, V-1007, HEIGHT: 106 FT ; DIAMETER: 7 FT 6 IN A/N: 493279	D347				
DRUM, V-1008, DEPROPANIZER REFLUX, LENGTH: 13 FT 6 IN; DIAMETER: 4 FT 6 IN A/N: 493279	D348				
COLUMN, DEBUTANIZER, V-1009, HEIGHT: 93 FT 6 IN; DIAMETER: 5 FT 6 IN A/N: 493279	D349				
DRUM, V-1010, DEBUTANIZER REFLUX, HEIGHT: 14 FT ; DIAMETER: 5 FT A/N: 493279	D350				
DRUM, AMINE SCRUBBER FEED,V-2381, HEIGHT: 11 FT ; DIAMETER: 4 FT 6 IN A/N: 493279	D1652				
SCRUBBER, V-1011, AMINE, HEIGHT: 51 FT ; DIAMETER: 5 FT 6 IN A/N: 493279	D351				
DRUM, FLASH, V-1012, CONDENSATE, LENGTH: 10 FT ; DIAMETER: 3 FT 6 IN A/N: 493279	D375				
DRUM, FRACTIONATOR COMPRESSOR SUCTION, V-1695, HEIGHT: 8 FT ; DIAMETER: 5 FT A/N: 493279	D352				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
POT, V-1025, DEPROPANIZER REBOILER CONDENSATE, LENGTH: 12 FT ; DIAMETER: 1 FT 5 IN A/N: 493279	D376				
POT, V-1026, DEBUTANIZER REBOILER CONDENSATE, LENGTH: 12 FT ; DIAMETER: 1 FT 5 IN A/N: 493279	D928				
VESSEL, SEPARATOR, V-2036, COKER GAS OIL, HEIGHT: 5 FT 2 IN; DIAMETER: 1 FT A/N: 493279	D355				
VESSEL, SEPARATOR, V-1087, FCC GAS OIL SOLIDS, HEIGHT: 5 FT 2 IN; DIAMETER: 1 FT A/N: 493279	D356				
VESSEL, COALESCER, V-1088, FCC GAS OIL, LENGTH: 10 FT ; DIAMETER: 3 FT A/N: 493279	D357				
VESSEL, COALESCER, V-1089, COKER GAS OIL, LENGTH: 10 FT ; DIAMETER: 3 FT A/N: 493279	D358				
VESSEL, EFFLUENT COALESCER, V-1090, LENGTH: 15 FT ; DIAMETER: 5 FT A/N: 493279	D1265				
DRUM, INJECTION, V-1122, DIMETHYL DISULFIDE, LENGTH: 10 FT ; DIAMETER: 3 FT A/N: 493279	D359				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
COMPRESSOR, C-93, RECYCLE GAS A/N: 493279	D364				
COMPRESSOR, FRACTIONATOR NO.1 & 2, C-94/95, 2 TOTAL, RECIPROCATING TYPE A/N: 493279	D930				
TOWER, DEA, V-1621, HEIGHT: 37 FT 6 IN; DIAMETER: 3 FT A/N: 493279	D932				
KNOCK OUT POT, V-1622, LIQUID, HEIGHT: 7 FT 3 IN; DIAMETER: 1 FT 2 IN A/N: 493279	D1266				
MIST ELIMINATOR, V-1623, HEIGHT: 9 FT ; DIAMETER: 2 FT 6 IN A/N: 493279	D933				
VESSEL, SEPARATOR, MEMBRANE, V-1624-38, 15 TOTAL, HEIGHT: 12 FT 5 IN; DIAMETER: 8 FT A/N: 493279	D934				
COMPRESSOR, C-141, RECIPROCATING TYPE A/N: 493279	D377				H23.4
DRUM, SECOND STAGE CHARGE, V-1965, LENGTH: 10 FT ; DIAMETER: 3 FT A/N: 493279	D1340				
KNOCK OUT POT, LIQUID, V-1995, LENGTH: 10 FT ; DIAMETER: 3 FT A/N: 493279	D1341				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
FILTER, V-1967, STRIPPED WATER, LENGTH: 10 FT ; DIAMETER: 3 FT A/N: 493279	D1342				
DRUM, SURGE, V-1966, WASH WATER, HEIGHT: 13 FT 6 IN; DIAMETER: 5 FT 6 IN A/N: 493279	D1530				
DRUM, V-1972, FLASH, FOUL WATER, LENGTH: 10 FT ; DIAMETER: 6 FT A/N: 493279	D1531				
COMPRESSOR, HYDROGEN, C-91/92, 2 TOTAL, RECIPROCATING TYPE A/N: 493279	D245				
COMPRESSOR, C-98 A/N: 493279	D102				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 493279	D1454			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 2: HYDROCRACKING HEATERS					
HEATER, H-300, REFINERY GAS, WITH LOW NOX BURNER, 47.6 MMBTU/HR WITH A/N: 469994 BURNER, 16 BURNERS, REFINERY GAS, WITH LOW NOX BURNER, 47.6 MMBTU/HR	D384	C784 S994	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, E54.5, E54.15, H23.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
HEATER, H-301, REFINERY GAS, WITH LOW NOX BURNER, 23.5 MMBTU/HR WITH A/N: 469995 BURNER, 6 BURNERS, REFINERY GAS, WITH LOW NOX BURNER, 23.5 MMBTU/HR	D385	C784 S994	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 400 PPMV (5A) [RULE 1146, 11-17-2000; RULE 1146, 9-5-2008]; CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.2, E54.5, E54.15, H23.3
SELECTIVE CATALYTIC REDUCTION, ENGLEHARD, W/ A FIXED BED REACTOR, VANADIA-TITANIA CATALYST, HONEYCOMB TYPE, 59 CU.FT. WITH A/N: 469996 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C784	D384 D385 S994		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, E71.7
STACK A/N: 469996	S994	D384 D385 C784			
HEATER, H-302, REFINERY GAS, WITH LOW NOX BURNER, 47.6 MMBTU/HR WITH A/N: 469997 BURNER, 16 BURNERS, REFINERY GAS, WITH LOW NOX BURNER, 47.6 MMBTU/HR	D386	S692 C786	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, E54.4, E54.14, H23.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
HEATER, H-303, REFINERY GAS, WITH LOW NOX BURNER, 71.4 MMBTU/HR WITH A/N: 469998 BURNER, 8 BURNERS, REFINERY GAS, WITH LOW NOX BURNER, 71.4 MMBTU/HR	D387	S692 C786	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, E54.4, E54.14, H23.3
SELECTIVE CATALYTIC REDUCTION, ENGLEHARD, W/ A FIXED BED REACTOR, VANADIA-TITANIA CATALYST, HONEYCOMB TYPE, 78 CU.FT. WITH A/N: 469999 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C786	D386 D387 S692		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, D29.3, E71.7
STACK A/N: 469999	S692	D386 D387 C786			
HEATER, H-304, REFINERY GAS, WITH LOW NOX BURNER, 147 MMBTU/HR WITH A/N: 470000 BURNER, 10 BURNERS, REFINERY GAS, MCGILL, MODEL STR-13T, WITH LOW NOX BURNER, 147 MMBTU/HR	D388	C788 S995	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: (9) [RULE 404, 2-7-1986]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	B61.1, D90.7, D328.1, E54.3, E54.13, H23.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 8: HYDROCRACKING					P13.1
SELECTIVE CATALYTIC REDUCTION, ENGLEHARD, W/ A FIXED BED REACTOR, VANADIA-TITANIA CATALYST, HONEYCOMB TYPE, 104 CU.FT. WITH A/N: 470001 INJECTOR, AMMONIA, WITH AMMONIA INJECTION	C788	D388 S995		NH3: 20 PPMV (4) [RULE 1303(a)(1)-BACT, 5-10-1996]	D12.1, D28.4, E71.7
STACK A/N: 470001	S995	D388 C788			
Process 9: ALKYLATION					P13.1
System 1: ALKYLATION UNIT					S13.4, S15.2, S15.5, S31.1, S31.4
FILTER, SALT, V-579, PROPANE, LENGTH: 25 FT 4 IN; DIAMETER: 5 FT A/N:	D390				
VESSEL, SALT DRIER, V-582, LENGTH: 15 FT 8 IN; DIAMETER: 4 FT A/N:	D391				
VESSEL, V-1407, BUTYLENE COALESCER, LENGTH: 13 FT 2 IN; DIAMETER: 3 FT 6 IN A/N:	D392				
VESSEL, COALESCER, V-1408, OLEFIN, LENGTH: 10 FT 5 IN; DIAMETER: 1 FT 8 IN A/N:	D393				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
SETTLING TANK, 1ST STAGE, V-1409, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT 6 IN A/N:	D394				
SETTLING TANK, 2ND STAGE, V-1410, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT 6 IN A/N:	D395				
TANK, FLASH, V-1411, REACTOR EFFLUENT, LENGTH: 30 FT 6 IN; DIAMETER: 8 FT 6 IN A/N:	D396				
TANK, FLASH, V-1414, REFRIGERANT, LENGTH: 24 FT ; DIAMETER: 6 FT 6 IN A/N:	D397				
ACCUMULATOR, V-1416, REFRIGERANT, LENGTH: 18 FT ; DIAMETER: 5 FT A/N:	D399				
ACCUMULATOR, V-1953, DEPROPANIZER FEED, LENGTH: 20 FT ; DIAMETER: 4 FT 6 IN A/N:	D400				
DRUM, BLOWDOWN, V-1418, ACID, LENGTH: 27 FT ; DIAMETER: 10 FT A/N:	D401				
SCRUBBER, CAUSTIC, V-1419, ACID VAPOR, LENGTH: 16 FT ; DIAMETER: 8 FT A/N:	D402				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
COLUMN, DEETHANIZER, V-1420, LENGTH: 81 FT 6 IN; DIAMETER: 5 FT A/N:	D403				
ACCUMULATOR, V-1421, DEETHANIZER OVERHEAD, LENGTH: 80 FT ; DIAMETER: 5 FT A/N:	D404				
POT, V-1422, DEETHANIZER REBOILER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N:	D405				
SETTLING TANK, V-1423, DEPROPANIZER CAUSTIC WASH, LENGTH: 30 FT ; DIAMETER: 6 FT 6 IN A/N:	D406				
SETTLING TANK, V-1424, DEPROPANIZER WATER WASH, LENGTH: 26 FT ; DIAMETER: 6 FT A/N:	D407				
VESSEL, PRECIPITATOR, V-1425, DEPROPANIZER FEED, HEIGHT: 12 FT ; DIAMETER: 6 FT A/N:	D408				
COLUMN, DEPROPANIZER, V-1426, HEIGHT: 118 FT 6 IN; DIAMETER: 7 FT A/N:	D409				
POT, V-1427, DEPROPANIZER REBOILER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N:	D410				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
ACCUMULATOR, V-1428, DEPROPANIZER OVERHEAD, LENGTH: 15 FT ; DIAMETER: 6 FT A/N:	D411				
VESSEL, DEGASSER, V-1429, ALKALINE WATER, LENGTH: 8 FT ; DIAMETER: 4 FT A/N:	D949			HAP: (10) [40CFR 63 Subpart CC, #1, 6-23-2003]	
VESSEL, DEGASSER, V-1430, SPENT CAUSTIC, LENGTH: 8 FT ; DIAMETER: 4 FT A/N:	D950				
DRUM, FLASH, V-1432, HP CONDENSATE, LENGTH: 5 FT ; DIAMETER: 3 FT A/N:	D413				
DRUM, FLASH, V-1433, LP CONDENSATE, LENGTH: 37 FT 4 IN; DIAMETER: 11 FT A/N:	D414				
POT, V-1434, ALKY DIB. CAUSTIC HEATER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N:	D415				
TANK, WASH, V-1435, ALKY DIB. CAUSTIC SETTLER, LENGTH: 43 FT ; DIAMETER: 9 FT A/N:	D416				
TANK, WASH, V-1436, ALKY DIB. WATER SETTLER, LENGTH: 40 FT ; DIAMETER: 8 FT A/N:	D417				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
VESSEL, PRECIPITATOR, V-1437, ALKY DIB. FEED, LENGTH: 10 FT ; DIAMETER: 10 FT A/N:	D418				
DRUM, V-1438, ALKY DIB. TEA, LENGTH: 9 FT ; DIAMETER: 3 FT A/N:	D419				
COLUMN, ALKY DIB, V-1439, HEIGHT: 165 FT ; DIAMETER: 11 FT A/N:	D420				
POT, V-1440A/B/C/D, ALKY DIB. REBOILER CONDENSATE, 4 TOTAL, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N:	D421				
ACCUMULATOR, V-1441, ALKY DIB. OVERHEAD, LENGTH: 42 FT ; DIAMETER: 10 FT 6 IN A/N:	D422				
COLUMN, ALKY DEBUTANIZER, V-1442, HEIGHT: 94 FT 9 IN; DIAMETER: 5 FT A/N:	D423				
POT, V-1443, ALKY DEBUTANIZER REBOILER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N:	D424				
ACCUMULATOR, V-1444, ALKY DEBUTANIZER OVERHEAD, LENGTH: 15 FT ; DIAMETER: 4 FT 6 IN A/N:	D425				

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
ACCUMULATOR, V-1449, V-1450 AND V-2103, S.O. AT E-1277, E1276 AND E-1721, 3 TOTAL, HEIGHT: 2 FT 3 IN; DIAMETER: 1 FT 7 IN A/N:	D431				
KNOCK OUT POT, FLARE, V-1694, LENGTH: 23 FT ; DIAMETER: 8 FT A/N:	D432				
DRUM, FLASH, V-1583, MIXED BUTANE TREATER, CAUSTIC A/N:	D953				
VESSEL, V-1156/7/8/9, K.O. POTS 12001/2/3/4, 4 TOTAL A/N:	D954				
VESSEL, PRECIPITATOR, V-1412, ACID A/N:	D960				
VESSEL, V-1413, SPENT ACID A/N:	D961				
SETTLING TANK, 3RD STAGE, V-2090, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT A/N:	D1080				
VESSEL, CONTACTOR, E-1721, 9800 SQ.FT., LENGTH: 92 FT ; DIAMETER: 63 FT A/N:	D1081				
COMPRESSOR, C-155, REFRIGERANT, CENTRIFUGAL, BARREL TYPE, 4000 H.P. A/N:	D1082				H23.4

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
TANK, SETTLING, V-2241, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT 6 IN A/N:	D1504				
VESSEL, V-2242, ISOBUTANE COALESCER, LENGTH: 7 FT 6 IN; DIAMETER: 5 FT A/N:	D1505				
TANK, WASH, V-2250, ACID, LENGTH: 20 FT ; DIAMETER: 12 FT A/N:	D1506				
VESSEL, CONTACTORS NOS. 1 & 2, E-1276 & 1277 A/N:	D959				
VESSEL, CONTACTOR NO. 4, E-1827 A/N:	D1507				
COMPRESSOR, C-164, PROPANE, 1455-HP A/N:	D1509				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N:	D1392			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 2: MIXED BUTANE TREATING UNIT					S13.4, S15.2, S15.3
TOWER, DEBUTANIZER ACCUMULATOR , V-272, HEIGHT: 138 FT 9 IN; DIAMETER: 6 FT A/N: 470002	D434				
ACCUMULATOR, V-1441, DEISOBUTANIZER, LENGTH: 12 FT ; DIAMETER: 6 FT A/N: 470002	D435				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
KNOCK OUT POT, V-273, LIQUID, LENGTH: 12 FT ; DIAMETER: 4 FT A/N: 470002	D436				
DRUM, V-285, DIB CONDENSATE, LENGTH: 4 FT ; DIAMETER: 2 FT A/N: 470002	D437				
DRUM, CAUSTIC WASH, V-294, LENGTH: 40 FT ; DIAMETER: 4 FT 10 IN A/N: 470002	D1298				
DRUM, SURGE, V-1528, LENGTH: 46 FT ; DIAMETER: 8 FT A/N: 470002	D445				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470002	D1455			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 3: ALKYLATION FEED TREATMENT UNIT					S13.4, S15.2
DRUM, SURGE, V-1455, PROPYLENE, LENGTH: 46 FT ; DIAMETER: 8 FT A/N: 470003	D440				
VESSEL, PHASE SEPARATOR, V-1685 TO V-1690, 6 TOTAL, LENGTH: 16 FT ; DIAMETER: 4 FT 6 IN A/N: 470003	D442				
OXIDIZER, V-1692, HEIGHT: 50 FT ; DIAMETER: 6 FT 6 IN A/N: 470003	D449	D722 D723 D724 D725			
VESSEL, SEPARATOR, V-2157, DISULFIDE OIL/CAUSTIC, LENGTH: 30 FT ; DIAMETER: 7 FT 6 IN A/N: 470003	D450	D722 D723 D724 D725		HAP: (10) [40CFR 63 Subpart CC, #1, 6-23-2003]	

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 9: ALKYLATION					P13.1
VESSEL, SAND FILTER, V-1691, HEIGHT: 15 FT 8 IN; DIAMETER: 4 FT A/N: 470003	D439				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470003	D1456			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
Process 11: IN-LINE GASOLINE BLENDING					P13.1
System 1: IN-LINE GASOLINE BLENDING UNIT					
TANK, TK-95, CORROSION INHIBITOR, WITH NITROGEN BLANKET, 4000 GALS; DIAMETER: 6 FT 4 IN; HEIGHT: 17 FT 3 IN A/N: 470004	D453				
DRUM, V-1727/1728, DYE ADDITIVE, 2 TOTAL, WITH NITROGEN BLANKET, 250 GALS; DIAMETER: 3 FT ; HEIGHT: 5 FT A/N: 470004	D454				
VESSEL, PRESSURIZED, V-1720-24 AND V-1729, PROTO FUEL, 6 TOTAL, WITH NITROGEN BLANKET, 300 GALS A/N: 470004	D457				
DRUM, V-1725, SPENT/EXCESS PROTO FUEL, WITH NITROGEN BLANKET, 300 GALS A/N: 470004	D1301				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470004	D1458			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
Process 12: TREATING /STRIPPING					P13.1

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
System 1: HCOD TREATING UNIT					S13.2, S13.5
TANK, HOLDING, TK-7001, COKER BLOWDOWN, HEIGHT: 32 FT ; DIAMETER: 40 FT A/N: 524237	D466			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40
OIL WATER SEPARATOR, V-1743, COKER SLOP WATER CPI, 300 GPM A/N: 524237	D460			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40
OIL WATER SEPARATOR, V-1768, SLOP WATER CPI, 300 GPM A/N: 524237	D461			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40
FLOATATION UNIT, V-1168, IGFU SOUTH, 700 GPM CAPACITY A/N: 524237	D458			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40
FLOATATION UNIT, V-1166, IGFU NORTH, 300 GPM CAPACITY A/N: 524237	D459			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40

* (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
AIR FLOATATION UNIT, DISSOLVED AIR FLOATATION (DAF), TK-158, EFFLUENT WATER DAF, HEIGHT: 11 FT 4 IN; DIAMETER: 45 FT A/N: 524237	D463	C472 C473		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E54.18, E336.4, H23.40
TANK, SURGE, TK-159A, DAF EFFLUENT, HEIGHT: 10 FT ; DIAMETER: 16 FT A/N: 524237	D464	C472 C473		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E54.18, E336.4, H23.40
TANK, TK-149, CPI OIL SLUDGE, HEIGHT: 9 FT ; DIAMETER: 9 FT A/N: 524237	D462			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40
TANK, FLOCCULATION, TK-267, HEIGHT: 14 FT ; DIAMETER: 12 FT A/N: 524237	D465	C472 C473		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E54.18, E336.4, H23.40
TANK, COLLECTION, TK-148, OILY SLUDGE, 100 BBL A/N: 524237	D467			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40

* (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
TANK, NO. 47, DAF FLOAT, 2000 GALS; DIAMETER: 6 FT 4 IN; HEIGHT: 8 FT 8 IN A/N: 524237	D471	C472 C473		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E54.18, E336.4, H23.40
VESSEL, V-1748, DAF AIR PRESSURIZATION, WITH NITROGEN BLANKET A/N: 524237	D1304			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
ADSORBER, V-2315/V-2316, ACTIVATED CARBON, CONNECTED IN SERIES, EACH 1000 POUNDS, 2,000 POUNDS TOTAL A/N: 524237	C472	D463 D464 D465 D471		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 50 PPMV (8A) [CONSENT DECREE, 3-21-2001]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	D90.4, E153.1, H23.40
ADSORBER, V-2313/V-2314, ACTIVATED CARBON (SPARE), CONNECTED IN SERIES, EACH 1,000 POUNDS, 2,000 POUNDS TOTAL A/N: 524237	C473	D463 D464 D465 D471		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 50 PPMV (8A) [CONSENT DECREE, 3-21-2001]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	D90.4, E153.1, H23.40

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
TANK, COLLECTION, TK-6002/6003, SLUDGE, 2 TOTAL, 6000 BBL A/N: 524237	D469			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003; 40CFR 61 Subpart FF, 12-4-2003]	E336.1, H23.1, H23.40
TANK, TK-156, SLUDGE FEED TANK, 2600 GALS A/N: 524237	D709			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
OIL WATER SEPARATOR, V-1745, FILTRATE CPI, 150 GPM A/N: 524237	D703			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E71.3, H23.40
SUMP, UNDERGROUND, FIXED COVER, PUMP STATION, TK-125A, WATER DRAW COLLECTION, 3000 BBL A/N: 470006	D807			HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]	E336.2
SUMP, UNDERGROUND, FIXED COVER, PUMP STATION, TK-125B, WATER DRAW COLLECTION, 3000 BBL A/N: 470007	D808			HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]	E336.2
SUMP, UNDERGROUND, FIXED COVER, PUMP STATION, TK-125C, WATER DRAW COLLECTION, 3000 BBL A/N: 470008	D809			HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]	E336.2

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
TANK, VTK-01, IGFU POLYMER, WITH NITROGEN BLANKET, 2100 GALS A/N: 524237	D1305				
TANK, VTK-02, PEROXIDE, WITH NITROGEN BLANKET, 7000 GALS A/N: 524237	D1306				
TANK, VTK-03, DAF POLYMER, WITH NITROGEN BLANKET, 2100 GALS A/N: 524237	D1307				
TANK, V-56X-MKT, HYDROGEN PEROXIDE, WITH NITROGEN BLANKET, 7000 GALS A/N: 524237	D1308				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 524237	D1459				H23.5
DRAIN SYSTEM COMPONENT A/N: 524237	D1495			HAP: (10) [40CFR 63 Subpart CC, #4, 6-23-2003]	H23.17
System 2: LCOD TREATING UNIT					S13.2, S13.5
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80218, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 40 FT WITH A/N: 470009 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY B OR BETTER PER RULE 219(C)(4)	D657			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, C1.25, D90.18, D90.19, H23.25

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
STORAGE TANK, FIXED ROOF, TK-15001, WASTE WATER, 15000 BBL; DIAMETER: 52 FT ; HEIGHT: 40 FT A/N: 470010	D1001			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003]	E336.2, H23.1, H23.25, K67.2
STORAGE TANK, FIXED ROOF, TK-15002, WASTE WATER, 15000 BBL; DIAMETER: 52 FT ; HEIGHT: 40 FT A/N: 470011	D1002			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003]	E336.2, H23.1, H23.25, K67.2
STORAGE TANK, EXTERNAL FLOATING ROOF, HOLDING, NO. 143000, 143000 BBL; DIAMETER: 140 FT ; HEIGHT: 52 FT WITH A/N: 470012 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, WIPER TYPE	D688			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	C1.24, D90.19, E71.1, H23.25
SKIMMING POND, NO. 2, 50 ACRE FT. CAP., STORM WATER, UNLINED A/N: 470013	D696			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
FLOATATION UNIT, INDUCED-GAS TYPE, V-2076/2077/2078, 3 TOTAL, HEIGHT: 10 FT ; DIAMETER: 12 FT A/N: 470013	D998			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]	E336.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
SKIMMING POND, AFU BASIN NO.1, W/ FLOCCULATOR, SURFACE SKIMMER, 2 SCREW CONVEYORS AND BOTTOM SCRAPER, WIDTH: 25 FT ; DEPTH: 15 FT ; LENGTH: 100 FT A/N: 470013	D1022			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
SKIMMING POND, AFU BASIN NO.2, W/ A FLOCCULATOR, A SURFACE SKIMMER, AND A SCREW CONVEYOR, WIDTH: 25 FT ; DEPTH: 15 FT ; LENGTH: 100 FT A/N: 470013	D1023			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
VESSEL, PRESSURE RETENTION FOR AFU NOS. 1 & 2, V-1106/1121, 2 TOTAL, HEIGHT: 7 FT 6 IN; DIAMETER: 4 FT A/N: 470013	D498			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
OIL WATER SEPARATOR, NO. 6, LAMELLA 2, CONSISTING OF TWO UNITS, V2087 & V2088, WIDTH: 15 FT ; LENGTH: 45 FT A/N: 470013	D693			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
OIL WATER SEPARATOR, NO. 3, LAMELLA 2, CONSISTING OF TWO UNITS, V1980 & V1979, WIDTH: 13 FT ; LENGTH: 60 FT A/N: 470013	D689			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470013	D1460				H23.5
DRAIN SYSTEM COMPONENT A/N: 470013	D1496			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	H23.17

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
System 3: OIL/WATER SEPARATOR NO. 7					S13.5
OIL WATER SEPARATOR, NO. 7, COVERED, WITH SLOTTED PIPE SKIMMER, WIDTH: 10 FT ; HEIGHT: 6 FT 9 IN; LENGTH: 44 FT 8 IN A/N: 470014	D697	C699		HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]	E71.8
SUMP, SKIM-OIL SUMP A/N: 470014	D698				
CARBON ADSORBER, AND SPARE, EACH CONTAINS 200 LBS OF ACTIVATED CARBON A/N: 470014	C699	D697			D90.5, E153.1
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470014	D1399				H23.5
System 4: OIL/WATER SEPARATOR NO. 8					S13.5
OIL WATER SEPARATOR, NO. 8, COVERED, WITH A SLOTTED PIPE SKIMMER, WIDTH: 10 FT ; DIAMETER: 6 FT 9 IN; LENGTH: 44 FT 8 IN A/N: 470015	D700	C702		HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]	E71.8
SUMP, WITH A 10 HP MOTOR A/N: 470015	D701				
CARBON ADSORBER, AND SPARE, EACH CONTAINS 200 LBS OF ACTIVATED CARBON A/N: 470015	C702	D700			D90.5, E153.1
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470015	D1461				H23.5

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
System 7: BRINE WATER TREATMENT					S13.5, S15.6, S31.3
DRUM, HEAT TREATING, V-2201, HEIGHT: 20 FT ; DIAMETER: 16 FT A/N: 470291	D1480			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
DRUM, HEAT TREATING, V-2202, HEIGHT: 40 FT ; DIAMETER: 12 FT A/N: 470291	D1481			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
DRUM, CLARIFIED OIL, V-2204, HEIGHT: 6 FT ; DIAMETER: 3 FT A/N: 470291	D1482			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
TANK, CLARIFIER THICKENER, TK-2007, HEIGHT: 16 FT ; DIAMETER: 30 FT A/N: 470291	D1483			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
TANK, CLARIFIER EFFLUENT, TK-43, HEIGHT: 9 FT ; DIAMETER: 6 FT A/N: 470291	D1484			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
DRUM, RECOVERY OIL, V-2203, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 470291	D1485			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	H23.40
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470291	D1683			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
System 8: FUEL GAS TREATING SYSTEM					S13.4, S15.2, S18.4

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 12: TREATING /STRIPPING					P13.1
ABSORBER, AMINE, V-1640, HEIGHT: 66 FT ; DIAMETER: 4 FT A/N: 470016	D66				
KNOCK OUT POT, V-1641, AMINE, HEIGHT: 10 FT ; DIAMETER: 3 FT 6 IN A/N: 470016	D67				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470016	D1561				H23.5
Process 14: LOADING AND UNLOADING					
System 1: INORGANIC CHEMICAL LOADING AND UNLOADING					S15.7
BULK MATERIAL LOAD/UNLOAD STATION, TANK TRUCK, FRESH AND SPENT ACID WITH A/N: 470017 LOADING AND UNLOADING ARM, FRESH AND SPENT ACID, 2 TOTAL; DIAMETER: 3 IN	D505				E57.1, E131.1
SCRUBBER, V-311, CAUSTIC, STANDBY, HEIGHT: 10 FT 7 IN; DIAMETER: 3 FT 6 IN A/N: 470017	C232				D90.3, E71.5, E71.11
System 2: TWO-POSITION PROPANE TRUCK LOADING					S15.14, S31.4

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 14: LOADING AND UNLOADING					
BULK MATERIAL LOAD/UNLOAD STATION, TANK TRUCK, PROPANE WITH A/N: LOADING AND UNLOADING ARM, BOTTOM, 4 TOTAL, PROPANE VAPOR RETURN LINE, 4 TOTAL	D507				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N:	D1465				H23.5
System 3: TWO-POSITION BUTANE LOADING/UNLOADING					S15.8
BULK MATERIAL LOAD/UNLOAD STATION, TANK TRUCK, BUTANE WITH A/N: 470019 LOADING AND UNLOADING ARM, BOTTOM, BUTANE, 4 TOTAL; DIAMETER: 2 IN VAPOR RETURN LINE, 1" DIA., 4 TOTAL	D513				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470019	D1466				H23.5
System 4: BUTANE TANK CAR LOADING/UNLOADING SYSTEM					S1.1, S15.6

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 14: LOADING AND UNLOADING					
BULK MATERIAL LOAD/UNLOAD STATION, STATIONS NOS. 1 - 6, 6 TOTAL, EACH WITH A/N: 470020 LOADING AND UNLOADING ARM, 2 TOTAL; DIAMETER: 2 IN VAPOR RETURN LINE, 1" DIA.	D790				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470020	D1467				H23.5
System 5: LPG/SPENT CAUSTIC LOADING/UNLOADING SYSTEM					S1.1, S15.6
BULK MATERIAL LOADING STATION, SPENT CAUSTIC, WITH A 1" VAPOR RETURN HOSE A/N: 470021	D798				D90.2, E71.6
BULK MATERIAL LOAD/UNLOAD STATION, STATIONS NOS. 1 - 6, 6 TOTAL, EACH, LPG WITH A/N: 470021 LOADING AND UNLOADING ARM, LPG, 2 TOTAL VAPOR RETURN LINE, 3" DIA.	D1040				C1.46
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470021	D1553				H23.5
System 9: ONE-POSITION DIESEL LOADING					

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 14: LOADING AND UNLOADING					
LOADING ARM, TANK TRUCK, DIESEL FUEL, DIAMETER: 2 IN A/N: 470022	D515				B22.2, C1.3
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470022	D1469				H23.5
Process 15: STORAGE TANKS					
System 1: FIXED ROOF STORAGE TANKS					
S13.7					
STORAGE TANK, FIXED ROOF, NO. 280, METHANOL, 11720 GALS; DIAMETER: 10 FT ; HEIGHT: 20 FT A/N: 470023	D520				E336.2, K67.2
STORAGE TANK, FIXED ROOF, T-1713, METHANOL, 71000 GALS; DIAMETER: 20 FT ; HEIGHT: 30 FT A/N: 470024	D521				E336.2, K67.2
STORAGE TANK, FIXED ROOF, T-122, TFA ADDITIVE, TFA IMPROVER ADDITIVE, 5000 GALS; DIAMETER: 10 FT ; HEIGHT: 10 FT A/N: 470026	D523				C1.21
STORAGE TANK, FIXED ROOF, T-476, CETANE IMPROVER ADDITIVE, CETANE ADDITIVE, 20000 GALS; DIAMETER: 16 FT ; HEIGHT: 15 FT A/N: 470033	D524			VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003]	C1.22, H23.1
STORAGE TANK, FIXED ROOF, NO. 240, 10080 GALS; DIAMETER: 18 FT ; HEIGHT: 5 FT A/N: 470034	D640				E336.2, K67.2

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 2515, 2551 BBL; DIAMETER: 40 FT ; HEIGHT: 12 FT A/N: 470035	D531				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 2530, 2652 BBL; DIAMETER: 40 FT ; HEIGHT: 11 FT 11 IN A/N: 470036	D533				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 2531, 2700 BBL; DIAMETER: 40 FT ; HEIGHT: 11 FT 11 IN A/N: 470037	D534				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 7200, 7225 BBL; DIAMETER: 42 FT ; HEIGHT: 29 FT 4 IN A/N: 470038	D543				B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 7201, WITH A MIXER, 7221 BBL; DIAMETER: 42 FT ; HEIGHT: 29 FT 4 IN A/N: 470039	D544			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 7501, WASTEWATER SLUDGE, WITH A MIXER, 7423 BBL; DIAMETER: 34 FT 8 IN; HEIGHT: 30 FT 3 IN A/N: 470040	D546			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	C1.27, D90.19, E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 11000, 11259 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 29 FT 3 IN A/N: 498928	D547				B22.4, C1.49, C1.51, D90.18, E336.2, K67.16

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 11001, DIESEL FUEL, 11259 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 29 FT 3 IN A/N: 470045	D548				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 11002, DIESEL FUEL, 11259 BBL; DIAMETER: 52 FT 4 IN; HEIGHT: 29 FT 1 IN A/N: 470046	D549			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 11003, 11259 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 29 FT 3 IN A/N: 470048	D550				B22.4, C1.7, D90.18, D90.19, E336.2
STORAGE TANK, FIXED ROOF, NO. 11004, 11259 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 29 FT 3 IN A/N: 499094	D551				B22.4, C1.49, C1.51, D90.18, E336.2, K67.16
STORAGE TANK, FIXED ROOF, NO. 13501, WITH A MIXER, 13632 BBL; DIAMETER: 52 FT 9 IN; HEIGHT: 35 FT 1 IN A/N: 470050	D552				E336.2, E440.1, E440.2, K67.11
STORAGE TANK, FIXED ROOF, NO. 13500, WITH A MIXER, 13632 BBL; DIAMETER: 52 FT 8 IN; HEIGHT: 35 FT A/N: 470051	D553				E336.2, E440.1, E440.2, K67.11
STORAGE TANK, FIXED ROOF, NO. 13502, 13609 BBL; DIAMETER: 52 FT 9 IN; HEIGHT: 35 FT 1 IN A/N: 470053	D554				E336.2, K67.2

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 13503, 13508 BBL; DIAMETER: 52 FT 6 IN; HEIGHT: 35 FT 1 IN A/N: 470054	D555				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 13504, 13510 BBL; DIAMETER: 52 FT 6 IN; HEIGHT: 35 FT 1 IN A/N: 470055	D556				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 13505, 13313 BBL; DIAMETER: 52 FT 6 IN; HEIGHT: 35 FT 1 IN A/N: 470057	D557				B22.8, C1.26, D90.18, E336.2, K67.8
STORAGE TANK, FIXED ROOF, NO. 13506, 13489 BBL; DIAMETER: 52 FT 4 IN; HEIGHT: 35 FT 1 IN A/N: 470059	D558				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 13507, 13489 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 35 FT 1 IN A/N: 470060	D559				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 13508, 13434 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 34 FT 11 IN A/N: 470061	D560				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 13509, 13463 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 35 FT 1 IN A/N: 470062	D561				B22.8, C1.8, D90.18, E336.2, H23.33, K67.8

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 13510, BRINE WATER, EQUIPPED WITH AN OIL SKIMMER, 13500 BBL; DIAMETER: 52 FT 9 IN; HEIGHT: 35 FT 6 IN A/N: 470292	D562			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	C1.23, E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 13511, BRINE WATER, EQUIPPED WITH AN OIL SKIMMER, 13500 BBL; DIAMETER: 52 FT 9 IN; HEIGHT: 35 FT 6 IN A/N: 470293	D563			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	C1.23, E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 13512, 13488 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 35 FT 1 IN A/N: 470070	D564				B22.8, C1.8, D90.18, E336.2, H23.33, K67.8
STORAGE TANK, FIXED ROOF, NO. 13513, 13283 BBL; DIAMETER: 52 FT ; HEIGHT: 35 FT A/N: 470071	D565			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 13514, 13286 BBL; DIAMETER: 52 FT ; HEIGHT: 35 FT A/N: 470072	D566				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 13515, 13475 BBL; DIAMETER: 52 FT 5 IN; HEIGHT: 35 FT A/N: 470073	D567			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 13525, 13425 BBL; DIAMETER: 52 FT 3 IN; HEIGHT: 35 FT A/N: 470076	D569				E336.2, K67.2

- * (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 13528, 13239 BBL; DIAMETER: 52 FT ; HEIGHT: 35 FT A/N: 470077	D571				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 13529, 13500 BBL; DIAMETER: 52 FT 4 IN; HEIGHT: 35 FT A/N: 470078	D572			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 13530, 13225 BBL; DIAMETER: 52 FT ; HEIGHT: 35 FT A/N: 470081	D573			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 25013, STRIPPED WATER, 24924 BBL; DIAMETER: 71 FT 10 IN; HEIGHT: 35 FT 1 IN A/N: 470295	D574				E336.2
STORAGE TANK, FIXED ROOF, NO. 25014, 24775 BBL; DIAMETER: 75 FT ; HEIGHT: 35 FT A/N: 470082	D575			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 25015, 25000 BBL; DIAMETER: 71 FT 10 IN; HEIGHT: 35 FT 1 IN A/N: 470083	D576			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 25017, 25753 BBL; DIAMETER: 71 FT 1 IN; HEIGHT: 71 FT A/N: 470084	D577			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 25018, 25340 BBL; DIAMETER: 71 FT 1 IN; HEIGHT: 35 FT 1 IN A/N: 470085	D578			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 25019, 25000 BBL; DIAMETER: 71 FT ; HEIGHT: 35 FT A/N: 470086	D579			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 36002, 36932 BBL; DIAMETER: 95 FT ; HEIGHT: 29 FT A/N: 470087	D581				B22.12, H23.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80033, DIESEL FUEL, WITH A MIXER, 80000 BBL; DIAMETER: 117 FT 10 IN; HEIGHT: 41 FT 10 IN A/N: 470088	D582			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 80034, DIESEL FUEL, WITH A MIXER, 80000 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 41 FT 8 IN A/N: 470089	D583			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 80035, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT A/N: 502823	D584				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80036, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT A/N: 498995	D585				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80038, DIESEL DISTILLATE, 80000 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 41 FT 8 IN A/N: 470091	D587			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 80039, 80122 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 41 FT 8 IN A/N: 470092	D588			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, NO. 80042, HEAVY CRACKED NAPHTHA, WITH 2 MIXERS, 79976 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470093	D589				C1.29, E336.2
STORAGE TANK, FIXED ROOF, NO. 80043, WASTE WATER, 79453 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470095	D591				B22.1, K67.2
STORAGE TANK, FIXED ROOF, NO. 80044, WITH TWO MIXER, 79847 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 8 IN A/N: 470096	D592				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80049, WITH A MIXER, 80032 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470098	D594				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80050, NAPHTHA, GASOLINE, CRUDE OIL, GAS OIL, DC CHARGE, WITH A MIXER, 80106 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470099	D595				B22.10, C1.5, D90.18, E336.2, K67.8

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 80051, WITH A MIXER, 80105 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470100	D596				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80055, 80064 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470101	D597				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80058, HTU-4 CHARGE, WITH INTERNAL HEATING COILS, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 8 IN A/N: 470104	D600				C1.29, E336.2
STORAGE TANK, FIXED ROOF, NO. 80060, GAS OIL, DC CHARGE, BUNKER OIL, CRUDE OIL, WITH A MIXER AND INTERNAL HEATING COILS, 76300 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470105	D602			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B22.9, C1.4, D90.18, E336.2
STORAGE TANK, FIXED ROOF, NO. 80062, 80066 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470107	D604				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80063, WITH A MIXER AND INTERNAL HEATING COILS, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT A/N: 470108	D605			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, HEATED, NO. 80064, TRANSMIX GASOLINE, GAS OIL, BUNKER OIL, DC CHARGE, CRUDE OIL, WITH A MIXER AND INTERNAL HEATING COILS, 76500 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 532207	D606			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B22.11, B22.13, C1.37, D90.18, E336.2, K67.8
STORAGE TANK, FIXED ROOF, HEATED, NO. 80065, DC CHARGE, BUNKER OIL, CRUDE OIL, WITH A MIXER AND INTERNAL HEATING COILS, 76500 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470110	D607			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B22.11, C1.37, D90.18, E336.2, K67.8
STORAGE TANK, FIXED ROOF, HEATED, NO. 80066, DC CHARGE, BUNKER OIL, CRUDE OIL, WITH A MIXER AND INTERNAL HEATING COILS, 75500 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470112	D608			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B22.9, C1.4, D90.18, E336.2, H23.40
STORAGE TANK, FIXED ROOF, HEATED, NO. 80067, WITH A MIXER AND INTERNAL HEATING COILS, 75000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 5 IN A/N: 470111	D609			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 80068, WITH A MIXER AND INTERNAL HEATING COILS, 76800 BBL; DIAMETER: 117 FT ; HEIGHT: 44 FT A/N: 470113	D610				K67.2

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 80069, 79836 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470114	D611			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 80070, DIESEL FUEL, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 2 IN A/N: 470115	D612			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	K67.2
STORAGE TANK, FIXED ROOF, NO. 80073, WITH INTERNAL HEATING COILS, 79980 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470118	D615			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80074, WITH A MIXER, 79675 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 9 IN A/N: 470119	D616			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80077, 79973 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 9 IN A/N: 470122	D619			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80078, WITH INTERNAL HEATING COILS, 79864 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470123	D620			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80080, WITH A MIXER AND INTERNAL HEATING COILS, 79808 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 9 IN A/N: 470125	D622				E336.2, K67.2

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 80081, WITH A MIXER AND INTERNAL HEATING COILS, 80093 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN A/N: 470126	D623			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 80083, WITH INTERNAL HEATING COILS, 80189 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 6 IN A/N: 470128	D625			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 80084, WITH A MIXER AND INTERNAL HEATING COILS, 80000 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 41 FT 9 IN A/N: 470129	D626			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 80085, WITH A MIXER AND INTERNAL HEATING COILS, 80175 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 41 FT 9 IN A/N: 470130	D627			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 80087, WITH INTERNAL HEATING COILS AND A MIXER, 80175 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 41 FT 10 IN A/N: 470131	D628			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.40, K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 80089, FC HEAVY GAS OIL, WITH TWO MIXERS AND INTERNAL HEATING COILS, 80000 BBL; DIAMETER: 119 FT 10 IN; HEIGHT: 41 FT 2 IN A/N: 470132	D629			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	K67.2
STORAGE TANK, FIXED ROOF, NO. 80091, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT A/N: 498996	D631				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 80219, 80131 BBL; DIAMETER: 117 FT 1 IN; HEIGHT: 41 FT 9 IN A/N: 470136	D633			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	E336.2, H23.10, H23.40, K67.2
STORAGE TANK, FIXED ROOF, NO. 80220, WITH ONE MIXER, 80021 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 41 FT 10 IN A/N: 470137	D634				E336.2, H23.9, K67.2
STORAGE TANK, FIXED ROOF, NO. 80221, WITH TWO MIXERS, 80025 BBL; DIAMETER: 117 FT ; HEIGHT: 42 FT A/N: 470141	D598			VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003]	E336.2, H23.1, K67.2
STORAGE TANK, FIXED ROOF, HEATED, NO. 125000, WITH INTERNAL HEATING COILS, 112000 BBL; DIAMETER: 148 FT 6 IN; HEIGHT: 40 FT 9 IN A/N: 470143	D636				E336.2, K67.2

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, HEATED, NO. 125001, WITH INTERNAL HEATING COILS, 112000 BBL; DIAMETER: 148 FT 6 IN; HEIGHT: 40 FT 9 IN A/N: 470144	D637				E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 20426, WITH OIL SKIMMER, HEIGHT: 40 FT ; DIAMETER: 60 FT A/N: 470145	D639			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B22.3, C1.19, D90.18, E336.2, H23.33, H23.40
STORAGE TANK, FIXED ROOF, NO. 96059, WITH TWO MIXERS, 96000 BBL; DIAMETER: 120 FT ; HEIGHT: 48 FT A/N: 470146	D982			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B22.8, C1.40, D90.18, E336.2, H23.1, K67.8
STORAGE TANK, FIXED ROOF, NO. 107, STRIPPED SOUR WATER, 100 BBL; DIAMETER: 8 FT ; HEIGHT: 12 FT A/N: 559086	D1500				C1.28, D90.19, E336.2, K67.2
STORAGE TANK, FIXED ROOF, NO. 36001, DIESEL FUEL, 36000 BBL; DIAMETER: 95 FT ; HEIGHT: 29 FT A/N: 470149	D1555			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 13516, LIGHT CYCLE GAS OIL, HYDROTREATED COKER GAS OIL, HYDRODESULFURIZED GAS OIL, COKER HEAVY GAS OIL, 13000 BBL; DIAMETER: 52 FT ; HEIGHT: 35 FT A/N: 470142	D568			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2

- * (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 80037, LIGHT CYCLE GAS OIL, HYDROTREATED COKER GAS OIL, HYDRODESULFURIZED GAS OIL, COKER HEAVY GAS OIL, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT A/N: 470090	D586			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 80092, LIGHT CYCLE GAS OIL, HYDROTREATED COKER GAS OIL, HYDRODESULFURIZED GAS OIL, COKER HEAVY GAS OIL, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT A/N: 470135	D632			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, FIXED ROOF, NO. 118066, LIGHT CYCLE GAS OIL, HYDROTREATED COKER GAS OIL, HYDRODESULFURIZED GAS OIL, COKER HEAVY GAS OIL, 118000 BBL; DIAMETER: 150 FT ; HEIGHT: 42 FT A/N: 470074	D635			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	B22.1, D90.18, K67.2
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470149	D1470				H23.5
System 2: EXTERNAL FLOATING ROOF STORAGE TANKS					S13.7

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 76000, WITH A MIXER, 76000 BBL; DIAMETER: 115 FT ; HEIGHT: 41 FT WITH A/N: 470150 FLOATING ROOF, PONTOON, RIVETED SHELL PRIMARY SEAL	D647			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	B22.1, D90.18, K67.2
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80009, STORMWATER, WITH LIFT STATION, 80000 BBL; DIAMETER: 110 FT ; HEIGHT: 48 FT WITH A/N: 535086 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE	D1719				B59.10
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470150	D1471				H23.5
System 3: PRESSURIZED STORAGE TANKS					S13.6, S15.1, S31.1
STORAGE TANK, PRESSURIZED, NO. 776, LIQUIFIED PETROLEUM GAS, 30000 GALS; DIAMETER: 9 FT 11 IN; LENGTH: 57 FT 1 IN A/N: 470153	D662				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, PRESSURIZED, NO. 777, LIQUIFIED PETROLEUM GAS, 30000 GALS; DIAMETER: 9 FT 11 IN; LENGTH: 57 FT 1 IN A/N: 470154	D663				
STORAGE TANK, PRESSURIZED, NO. 778, LIQUIFIED PETROLEUM GAS, 30000 GALS; DIAMETER: 9 FT 11 IN; LENGTH: 57 FT 1 IN A/N: 470155	D664				
STORAGE TANK, PRESSURIZED, NO. 779, LIQUIFIED PETROLEUM GAS, 30000 GALS; DIAMETER: 9 FT 11 IN; LENGTH: 57 FT 1 IN A/N: 470156	D665				
STORAGE TANK, PRESSURIZED, NO. 780, LIQUIFIED PETROLEUM GAS, 30000 GALS; DIAMETER: 9 FT 11 IN; LENGTH: 57 FT 1 IN A/N: 470157	D666				
STORAGE TANK, PRESSURIZED, NO. 1501, LIQUIFIED PETROLEUM GAS, 62515 GALS; DIAMETER: 11 FT ; HEIGHT: 80 FT 6 IN A/N: 470158	D667				
STORAGE TANK, PRESSURIZED, NO. 1502, LIQUIFIED PETROLEUM GAS, 62515 GALS; DIAMETER: 11 FT ; LENGTH: 80 FT 6 IN A/N: 470159	D669				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, PRESSURIZED, NO. 1503, LIQUIFIED PETROLEUM GAS, 62525 GALS; DIAMETER: 12 FT ; LENGTH: 80 FT 6 IN A/N: 470160	D670				
STORAGE TANK, PRESSURIZED, NO. 6000, LIQUIFIED PETROLEUM GAS, SPHERICAL, 251250 GALS; DIAMETER: 40 FT 6 IN A/N: 470161	D671				
STORAGE TANK, PRESSURIZED, NO. 6001, LIQUIFIED PETROLEUM GAS, SPHERICAL, 249186 GALS; DIAMETER: 40 FT 6 IN A/N: 470162	D672				
STORAGE TANK, PRESSURIZED, NO. 600, LIQUIFIED PETROLEUM GAS, 24570 GALS; DIAMETER: 7 FT ; LENGTH: 90 FT 1 IN A/N: 470163	D673				
STORAGE TANK, PRESSURIZED, NO. 1545, LIQUIFIED PETROLEUM GAS, 72100 GALS; DIAMETER: 12 FT ; LENGTH: 77 FT 6 IN A/N: 470164	D674				
STORAGE TANK, PRESSURIZED, NO. 1546, LIQUIFIED PETROLEUM GAS, 72100 GALS; DIAMETER: 12 FT ; LENGTH: 77 FT 6 IN A/N: 470167	D675				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, PRESSURIZED, NO. 1547, LIQUIFIED PETROLEUM GAS, 72100 GALS; DIAMETER: 12 FT ; LENGTH: 77 FT 6 IN A/N: 470169	D676				
STORAGE TANK, PRESSURIZED, NO. 1703, LIQUIFIED PETROLEUM GAS, 71600 GALS; DIAMETER: 12 FT ; LENGTH: 90 FT 1 IN A/N: 470170	D677				
STORAGE TANK, PRESSURIZED, NO. 1705, LIQUIFIED PETROLEUM GAS, 71736 GALS; DIAMETER: 12 FT ; LENGTH: 90 FT 1 IN A/N: 470171	D678				
STORAGE TANK, PRESSURIZED, NO. 1709, LIQUIFIED PETROLEUM GAS, 71736 GALS; DIAMETER: 12 FT ; LENGTH: 90 FT 1 IN A/N: 470172	D679				
STORAGE TANK, PRESSURIZED, NO. 1710, LIQUIFIED PETROLEUM GAS, 71736 GALS; DIAMETER: 12 FT ; LENGTH: 90 FT 1 IN A/N: 470173	D680				
STORAGE TANK, PRESSURIZED, NO. 5009, LIQUIFIED PETROLEUM GAS, SPHERICAL, 207000 GALS; DIAMETER: 38 FT A/N: 470174	D681				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, PRESSURIZED, NO. 5010, LIQUIFIED PETROLEUM GAS, SPHERICAL, 206052 GALS; DIAMETER: 36 FT A/N: 470175	D682				
STORAGE TANK, PRESSURIZED, NO. 12001, LIQUIFIED PETROLEUM GAS, SPHERICAL, 507570 GALS; DIAMETER: 51 FT A/N: 470176	D683				
STORAGE TANK, PRESSURIZED, NO. 12002, LIQUIFIED PETROLEUM GAS, SPHERICAL, 507192 GALS; DIAMETER: 51 FT A/N: 470177	D684				
STORAGE TANK, PRESSURIZED, NO. 12003, LIQUIFIED PETROLEUM GAS, SPHERICAL, 504882 GALS; DIAMETER: 51 FT A/N: 470179	D685				
STORAGE TANK, PRESSURIZED, NO. 12004, LIQUIFIED PETROLEUM GAS, SPHERICAL, 504882 GALS; DIAMETER: 51 FT A/N: 470207	D686				
STORAGE TANK, PRESSURIZED, NO. 50000, SPHERICAL, PENTANE, 50000 BBL; DIAMETER: 82 FT A/N: 470296	D1502				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470207	D1472				H23.16
System 4: FRESH/SPENT H2SO4 STORAGE TANKS					S15.7

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, NO. 4010, 4000 BBL; DIAMETER: 36 FT ; HEIGHT: 22 FT A/N: 470211	D527				
STORAGE TANK, FIXED ROOF, NO. 4011, 4000 BBL; DIAMETER: 36 FT ; HEIGHT: 22 FT A/N: 470212	D528				
System 5: DOMED EXTERNAL FLOATING ROOF STORAGE TANKS					S13.9
STORAGE TANK, DOMED EXTERNAL FLOATING ROOF, NO. 80209, WITH A MIXER, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 40 FT WITH A/N: 470297 DOME COVER, GEODESIC FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, MECHANICAL SHOE SECONDARY SEAL, CATEGORY A, RIM MOUNTED, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D648			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C1.33, D90.19, H23.1, H23.31, K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80211, WITH TWO MIXERS, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 42 FT WITH A/N: 470213 FLOATING ROOF, DOUBLE DECK, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D650			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80213, ALKYLATE, WITH TWO MIXERS, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 42 FT WITH A/N: 470215 FLOATING ROOF, DOUBLE DECK, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D652			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C1.31, K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80214, WITH TWO MIXERS, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 40 FT WITH A/N: 470217 FLOATING ROOF, PONTOON, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, WIPER TYPE SECONDARY SEAL, CATEGORY A, WIPER TYPE	D653			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C1.35, K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80217, WITH TWO MIXERS, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 40 FT WITH A/N: 470218 FLOATING ROOF, PONTOON, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D656			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 125002, ALKYLATE/GASOLINE, 125000 BBL; DIAMETER: 150 FT ; HEIGHT: 40 FT WITH A/N: 470298 FLOATING ROOF, PONTOON, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D659			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C1.36, C6.2, H23.33, K67.9

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 125004, ALKYLATE, 125000 BBL; DIAMETER: 134 FT ; HEIGHT: 50 FT WITH A/N: 470219 FLOATING ROOF, PONTOON, WELDED SHELL, WITH GEODESIC DOME COVER PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D1078			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	B22.8, C1.32, D90.18, H23.1

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80210, WITH A MIXER, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 60 FT WITH A/N: 470299 FLOATING ROOF, PONTOON, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE	D649			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C1.41, D90.19, K67.2
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 125003, WITH TWO MIXERS, 125000 BBL; DIAMETER: 150 FT ; HEIGHT: 40 FT WITH A/N: 470300 FLOATING ROOF, PONTOON, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE	D660			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C6.2, K67.9

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80215, WITH TWO MIXERS, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 40 FT WITH A/N: 470220 DOME COVER, GEODESIC FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, WIPER TYPE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D654			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	B22.8, C1.18, D90.18, K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, EXTERNAL FLOATING ROOF, NO. 80216, GASOLINE, WITH TWO MIXERS, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 40 FT WITH A/N: 470221 FLOATING ROOF, PONTOON, WELDED SHELL DOME COVER, GEODESIC PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D655			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C1.32, K67.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, DOMED EXTERNAL FLOATING ROOF, NO. 80212,, WITH TWO MIXERS, 80000 BBL; DIAMETER: 117 FT 2 IN; HEIGHT: 42 FT WITH A/N: 470222 DOME COVER, GEODESIC FLOATING ROOF, DOUBLE DECK, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D651			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	K67.2, K171.2

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, DOMED EXTERNAL FLOATING ROOF, NO. 96000,, GASOLINE, WITH TWO MIXERS, 96000 BBL; DIAMETER: 120 FT ; HEIGHT: 48 FT WITH A/N: 470223 DOME COVER, GEODESIC FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, WIPER TYPE GUIDEPOLE, GASKETED COVER, UNSLOTTED	D658			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	C1.33, K67.2, K171.2
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470223	D1362				H23.5
System 6: STORAGE TANKS, OTHERS					
STORAGE TANK, FIXED ROOF, NO. 1000, PERCHLOROETHYLENE, 1000 GALS; DIAMETER: 5 FT 4 IN; HEIGHT: 6 FT A/N: 470301	D1533				B59.2, C1.34, K67.17
STORAGE TANK, FIXED ROOF, TANK 192, CAUSTIC, 5460 GALS; DIAMETER: 9 FT ; HEIGHT: 11 FT 11 IN A/N: 519205	D1670				B59.11, E336.2, K67.17

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, FIXED ROOF, TANK138, CAUSTIC, 5460 GALS; DIAMETER: 9 FT ; HEIGHT: 11 FT 11 IN A/N: 519207	D1671				B59.11, E336.2, K67.17
STORAGE TANK, FIXED ROOF, TANK 139, CAUSTIC, 5460 GALS; DIAMETER: 9 FT ; HEIGHT: 11 FT 11 IN A/N: 519208	D1672				B59.11, E336.2, K67.17
STORAGE TANK, FIXED ROOF, TANK 200A, CAUSTIC (SPENT), 8400 GALS; DIAMETER: 12 FT ; HEIGHT: 12 FT A/N: 519209	D1673				B59.11, E336.2, K67.17
STORAGE TANK, FIXED ROOF, TANK 742, CAUSTIC (SPENT), 28560 GALS; DIAMETER: 17 FT ; HEIGHT: 16 FT 10.5 IN A/N: 530223	D1712				B59.15, E336.2, K67.17
System 7: INTERNAL FLOATING ROOF TANKS					S13.7

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80076, WITH INTERNAL HEATING COILS, 79727 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 9 IN WITH A/N: 495451 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED	D618			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B59.5, C1.47, C6.4, K67.15, K171.3
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80079, WITH A MIXER AND INTERNAL HEATING COILS, 79739 BBL; DIAMETER: 117 FT ; HEIGHT: 42 FT WITH A/N: 495452 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED	D621			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B59.5, C1.47, C6.4, K67.15, K171.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80090, WITH TWO MIXERS AND INTERNAL HEATING COILS, 80000 BBL; DIAMETER: 120 FT ; HEIGHT: 43 FT WITH A/N: 476389 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED	D630			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]	B59.4, C1.42, C6.4, H23.1, K67.12
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 476389	D1363				H23.5

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80071, 79774 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 9 IN WITH A/N: 509883 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED	D613			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003; 40CFR 61 Subpart FF, 12-4-2003]	B59.4, C1.47, C6.4, H23.1, K67.15, K171.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80072, 79965 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN WITH A/N: 544561 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED GUIDEPOLE, SLOTTED, WITH GASKETED SLIDING COVER WITH POLE WIPER, AND A POLE FLOAT WIPER	D614			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B59.8, C1.40, C6.4, H23.1, K67.15, K171.3

* (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80075, 79812 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN WITH A/N: 509881 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED GUIDEPOLE, SLOTTED, WITH GASKETED SLIDING COVER WITH POLE WIPER, AND A POLE FLOAT WIPER	D617			BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	B59.4, C1.54, C6.4, H23.1, K67.15, K171.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80045, WITH A MIXER, 80000 BBL; DIAMETER: 117 FT ; HEIGHT: 42 FT WITH A/N: 518304 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED GUIDEPOLE, SLOTTED, WITH GASKETED SLIDING COVER WITH POLE WIPER, AND A POLE FLOAT WIPER	D593			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003; 40CFR 61 Subpart FF, 12-4-2003]	B59.9, C1.53, C6.4, H23.1, K67.15, K171.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80057, WITH A MIXER, 80011 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN WITH A/N: 529906 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED GUIDEPOLE, SLOTTED, WITH GASKETED SLIDING COVER WITH POLE WIPER, AND A POLE FLOAT WIPER	D599			HAP: (10) [40CFR 63 Subpart CC, #3A, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003]	B59.13, C1.58, C6.4, H23.1, K67.15, K171.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, INTERNAL FLOATING ROOF, NO. 80061, 80074 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN WITH A/N: 529876 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED GUIDEPOLE, SLOTTED, WITH GASKETED SLIDING COVER WITH POLE WIPER, AND A POLE FLOAT WIPER	D603			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]; VOC: 500 PPMV (8) [40CFR 60 Subpart Kb, 10-15-2003]	B59.12, C1.54, C6.4, H23.1, K67.15, K171.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 15: STORAGE TANKS					P13.1
STORAGE TANK, HEATED, INTERNAL FLOATING ROOF, NO. 80082, WITH A SIDE MIXER, 76000 BBL; DIAMETER: 117 FT ; HEIGHT: 41 FT 10 IN WITH A/N: 529993 FLOATING ROOF, PONTOON, WELDED SHELL PRIMARY SEAL, CATEGORY A, METALLIC SHOE SECONDARY SEAL, CATEGORY A, MULTIPLE WIPERS, RIM MOUNTED GUIDEPOLE, SLOTTED, WITH GASKETED SLIDING COVER WITH POLE WIPER, AND A POLE FLOAT WIPER	D624				B59.14, C1.59, C6.4, H23.1, K67.15, K171.3
Process 17: ELECTRIC GENERATION					
System 1: EMERGENCY INTERNAL COMBUSTION ENGINES					
INTERNAL COMBUSTION ENGINE, EMERGENCY FIRE, DIESEL FUEL, VOLVO-PENTA, MODEL TD61, PORTABLE, 146 HP A/N: 470224	D713		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.2, C1.55, C177.1, D12.2, D135.1, K67.13

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
INTERNAL COMBUSTION ENGINE, C-161, DIESEL FUEL, JOHN DEERE, MODEL 31791R, 2 CYLINDERS, FOUR CYCLE, NATURALLY ASPIRATED, 55 HP A/N: 470225	D714		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.2, C1.56, D12.2, D135.1, K67.13
INTERNAL COMBUSTION ENGINE, C-156, EMERGENCY AIR, DIESEL FUEL, CUMMINS, MODEL NTA-855, 6 CYLINDERS, FOUR CYCLE, SERIAL NO. 11642155, WITH AFTERCOOLER, TURBOCHARGER, 435 BHP A/N: 484957	D1100		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.2, C1.56, D12.2, K67.13
INTERNAL COMBUSTION ENGINE, C-157, EMERGENCY AIR, DIESEL FUEL, CUMMINS, MODEL NTA-855, 6 CYLINDERS, FOUR CYCLE, SERIAL NO. 11680463, WITH AFTERCOOLER, TURBOCHARGER, 435 BHP A/N: 484958	D1101		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.2, C1.56, D12.2, K67.13
INTERNAL COMBUSTION ENGINE, C-158, EMERGENCY AIR, DIESEL FUEL, CUMMINS, MODEL NTA-855, 6 CYLINDERS, FOUR CYCLE, SERIAL NO. 11661695, WITH AFTERCOOLER, TURBOCHARGER, 435 BHP A/N: 484959	D1102		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.2, C1.56, D12.2, K67.13
INTERNAL COMBUSTION ENGINE, C-159, EMERGENCY AIR, DIESEL FUEL, CUMMINS, MODEL NTA-855, 6 CYLINDERS, FOUR CYCLE, SERIAL NO. 11661698, WITH AFTERCOOLER, TURBOCHARGER, 435 BHP A/N: 484960	D1103		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.2, C1.56, D12.2, K67.13

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
INTERNAL COMBUSTION ENGINE, C-160, EMERGENCY AIR, DIESEL FUEL, CUMMINS, MODEL NTA-855, 6 CYLINDERS, FOUR CYCLE, SERIAL NO. 11671783, WITH AFTERCOOLER, TURBOCHARGER, 435 BHP A/N: 484961	D1104		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; PM: (9) [RULE 404, 2-7-1986]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.2, C1.56, D12.2, K67.13
INTERNAL COMBUSTION ENGINE, EMERGENCY FIRE WATER, ENG-76, 6 CYLINDERS, DIESEL FUEL, CATERPILLAR, MODEL C15ACERT, SERIAL NO. JRE06392, WITH AFTERCOOLER, TURBOCHARGER, 475 BHP A/N: 481814	D1617		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	CO: 2.6 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; NOX + ROG: 3 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; PM: (9) [RULE 404, 2-7-1986]; PM10: 0.15 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.6, C1.43, C1.44, C1.45, D12.13, H23.36, K67.13

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements
 ** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
INTERNAL COMBUSTION ENGINE, EMERGENCY FIRE WATER, ENG-78, 6 CYLINDERS, DIESEL FUEL, CATERPILLAR, MODEL C15ACERT, SERIAL NO. JRE06395, WITH AFTERCOOLER, TURBOCHARGER, 475 BHP A/N: 481815	D1618		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	CO: 2.6 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; NOX + ROG: 3 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; PM: (9) [RULE 404, 2-7-1986]; PM10: 0.15 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.6, C1.43, C1.44, C1.45, D12.13, H23.36, K67.13
INTERNAL COMBUSTION ENGINE, EMERGENCY FIRE WATER, ENG-77, 6 CYLINDERS, DIESEL FUEL, JOHN DEERE, MODEL 6125HF070, SERIAL NO. RG6125H042377, WITH AFTERCOOLER, TURBOCHARGER, 500 BHP A/N: 481818	D1645		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	CO: 2.6 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; NOX + ROG: 4.9 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; PM: (9) [RULE 404, 2-7-1986]; PM10: 0.15 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.6, C1.43, C1.44, C1.45, D12.13, H23.36, K67.13

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
INTERNAL COMBUSTION ENGINE, C-18, EMERGENCY FIRE WATER, 6 CYLINDERS, DIESEL FUEL, CATERPILLAR, MODEL C18, SERIAL NO. WJH05543, WITH AFTERCOOLER, TURBOCHARGER, 700 BHP A/N: 481817	D1646		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	CO: 2.6 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; NOX + ROG: 3 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; PM: (9) [RULE 404, 2-7-1986]; PM10: 0.15 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.6, C1.43, C1.44, C1.45, D12.13, H23.36, K67.13
INTERNAL COMBUSTION ENGINE, EMERGENCY FIRE, ENG-80, DIESEL FUEL, JOHN DEERE, 6 CYLINDERS, MODEL 6135HFC48B, SERIAL NO. RG6135L014602 (460 KW), WITH AFTERCOOLER, TURBOCHARGER, 617 BHP A/N: 520668	D1692		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	CO: 2.6 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; NOX + ROG: 3 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; PM: (9) [RULE 404, 2-7-1986]; PM10: 0.15 GRAM/BHP-HR (5) [RULE 1470, 5-4-2012]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.6, C1.57, D12.13, H23.36, H23.41, K67.13

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
INTERNAL COMBUSTION ENGINE, EMERGENCY FIRE, ENG-81, DIESEL FUEL, JOHN DEERE, 6 CYLINDERS, MODEL 6135HFC48B, SERIAL NO. RG6135L018321 (460 KW), WITH AFTERCOOLER, TURBOCHARGER, 617 BHP A/N: 520669	D1693		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	CO: 2.6 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1) -BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; NOX + ROG: 3 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1) -BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; PM: (9) [RULE 404, 2-7-1986]; PM10: 0.15 GRAM/BHP-HR (5) [RULE 1470, 5-4-2012]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.6, C1.57, D12.13, H23.36, H23.41, K67.13
INTERNAL COMBUSTION ENGINE, EMERGENCY FIRE, ENG-83, DIESEL FUEL, JOHN DEERE, 6 CYLINDERS, MODEL 6135HFC48B, SERIAL NO. RG6135L018323 (460 KW), WITH AFTERCOOLER, TURBOCHARGER, 617 BHP A/N: 520670	D1694		NOX: PROCESS UNIT**; SOX: PROCESS UNIT**	CO: 2.6 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1) -BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; NOX: 469 LBS/1000 GAL DIESEL (1) [RULE 2012, 5-6-2005]; NOX + ROG: 3 GRAM/BHP-HR DIESEL (4) [RULE 1303(a)(1) -BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002]; PM: (9) [RULE 404, 2-7-1986]; PM10: 0.15 GRAM/BHP-HR (5) [RULE 1470, 5-4-2012]; SOX: 6.24 LBS/1000 GAL DIESEL (1) [RULE 2011, 5-6-2005]	B61.6, C1.57, D12.13, H23.36, H23.41, K67.13
System 2: COGENERATION UNIT A					

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements
 ** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
TURBINE, A, NATURAL GAS, REFINERY GAS, UNITED TECHNOLOGIES, MODEL FT4, WITH WATER INJECTION, 392 MMBTU/HR WITH A/N: 470302 GENERATOR, ELECTRIC, 30 MW BOILER, WASTE HEAT RECOVERY, UNFIRED INJECTOR, WATER INJECTION MIST ELIMINATOR, DOLLINGER, OE-158-300	D810	C811	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 96 PPMV (8) [40CFR 60 Subpart GG, 2-24-2006]; PM: 0.01 GRAINS/SCF (5) [RULE 475, 10-8-1976; RULE 475, 8-7-1978]; PM: 11 LBS/HR (5A) [RULE 475, 10-8-1976; RULE 475, 8-7-1978]	A63.3, A63.4, A327.1, B61.5, B61.9, D12.3, D29.2, D90.7, D90.10, D328.1, E51.2, E71.4, H23.18
CO OXIDATION CATALYST, JOHNSON MATTHEY A/N: 470302	C811	D810 C1536			D82.1
FILTER, V-1584, KING FILTER A A/N: 470302	D1648	D752 D753			
COMPRESSOR, C-127-129, FUEL GAS, 3 TOTAL, COMMON TO BOTH COGENERATION SYSTEM A AND B A/N: 470302	D973				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
SELECTIVE CATALYTIC REDUCTION, FIXED BED REACTOR, VANADIUM-TITANIUM-TUNGSTEN CATALYST, HALDOR TOPSOE OR EQUIVALENT, WAFER TYPE, 1226.83 CU.FT.; WIDTH: 12 FT 5 IN; HEIGHT: 31 FT ; LENGTH: 3 FT 6 IN WITH A/N: 470303 INJECTOR, ANHYDROUS AMMONIA	C1536	C811		NH3: 5 PPMV (4) [RULE 1303(a) (1)-BACT, 5-10-1996]	A195.1, D12.6, D12.7, D12.8, D29.5, E73.1, E179.1, E179.2
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470302	D1415				H23.5
System 3: COGENERATION UNIT B					
TURBINE, B, NATURAL GAS, REFINERY GAS, UNITED TECHNOLOGIES, MODEL FT4, WITH WATER INJECTION, 392 MMBTU/HR WITH A/N: 470304 GENERATOR, ELECTRIC, 30 MW BOILER, WASTE HEAT RECOVERY, UNFIRED INJECTOR, WATER INJECTION MIST ELIMINATOR, DOLLINGER, OE-158-300	D812	C813	NOX: MAJOR SOURCE**, SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; NOX: 96 PPMV (8) [40CFR 60 Subpart GG, 2-24-2006]; PM: 0.01 GRAINS/SCF (5) [RULE 475, 10-8-1976; RULE 475, 8-7-1978]; PM: 11 LBS/HR (5A) [RULE 475, 10-8-1976; RULE 475, 8-7-1978]	A63.3, A63.4, A327.1, B61.5, B61.9, D12.3, D29.2, D90.7, D90.10, D328.1, E51.4, E71.4, H23.18

* (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 17: ELECTRIC GENERATION					
CO OXIDATION CATALYST, JOHNSON MATHEY A/N: 470304	C813	D812 C1538			D82.1
FILTER, V-1585, KING FILTER B A/N: 470304	D1651	D752 D753			
COMPRESSOR, C-127-129, FUEL GAS, 3 TOTAL, COMMON TO BOTH COGENERATION SYSTEM A AND B A/N: 470302	D973				
SELECTIVE CATALYTIC REDUCTION, FIXED BED REACTOR, VANADIUM-TITANIUM-TUNGSTE N CATALYST, HALDOR TOPSOE OR EQUIVALENT, WAFER TYPE, 1226.83 CU.FT.; WIDTH: 12 FT 5 IN; HEIGHT: 31 FT ; LENGTH: 3 FT 6 IN WITH INJECTOR, ANHYDROUS AMMONIA	C1538	C813		NH3: 5 PPMV (4) [RULE 1303(a) (1)-BACT, 5-10-1996]	A195.1, D12.6, D12.7, D12.8, D29.5, E73.1, E179.1, E179.2
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470304	D1425				H23.5
Process 18: STEAM GENERATION					
BOILER, BO-7, PROCESS GAS, REFINERY GAS, BABCOCK AND WILCOX, MODEL SPL-F25AB NO. 12, OR 110000 LB/HR OF 225 PSIG STEAM (PROCESS GAS FROM FUME SCRUBBER OF P21/S2), 183.54 MMBTU/HR A/N: 470234	D722	D449 D450 S874	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, C1.1, C8.2, D90.7, D90.17, D328.1, H23.3

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 18: STEAM GENERATION					
BOILER, BO-8, PROCESS GAS, REFINERY GAS, BABCOCK AND WILCOX, MODEL SPL-F25AB NO. 12, OR 110000 LB/HR OF 225 PSIG STEAM (PROCESS GAS FROM FUME SCRUBBER OF P21/S2), 183.54 MMBTU/HR A/N: 470235	D723	D449 D450 S874	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, C1.1, C8.2, D90.7, D90.17, D328.1, H23.3
STACK A/N: 470235	S874	D722 D723			
BOILER, BO-9, PROCESS GAS, REFINERY GAS, BABCOCK AND WILCOX, MODEL SPL-F25AB NO. 12, OR 110000 LB/HR OF 225 PSIG STEAM (PROCESS GAS FROM FUME SCRUBBER OF P21/S2), 183.54 MMBTU/HR A/N: 470240	D724	D449 D450 S1028	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, C1.1, C8.2, D90.7, D90.17, D328.1, H23.3
BOILER, BO-10, PROCESS GAS, REFINERY GAS, BABCOCK AND WILCOX, MODEL SPL-F25AB NO. 12, OR 110000 LB/HR OF 225 PSIG OF STEAM (PROCESS GAS FROM FUME SCRUBBER OF P21/S2), 183.54 MMBTU/HR A/N: 470241	D725	D449 D450 S1028	NOX: MAJOR SOURCE**; SOX: MAJOR SOURCE**	CO: 2000 PPMV (5) [RULE 407, 4-2-1982]; PM: 0.1 GRAINS/SCF (5) [RULE 409, 8-7-1981]	A63.4, B61.1, C1.1, C8.2, D90.7, D90.17, D328.1, H23.3
STACK A/N: 470241	S1028	D724 D725			
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470241	D1416				H23.5
Process 19: MISCELLANEOUS					
System 1: FUEL STORAGE & DISPENSING					S13.8

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 19: MISCELLANEOUS					
FUEL DISPENSING NOZZLE, BALANCE TYPE PHASE II CONTROL, GASOLINE A/N: 470243	D734				D330.1, J110.1
STORAGE TANK, FIXED ROOF, NO. 15W, CONVAULT TYPE (G-70-116-F), GASOLINE, WITH SUBMERGED FILLING, 1000 GALS; WIDTH: 5 FT 8 IN; HEIGHT: 4 FT ; LENGTH: 11 FT A/N: 470243	D728				C1.12, J109.1, J119.1
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470244	D1473				H23.5
System 2: FUEL STORAGE & DISPENSING					S13.8
FUEL DISPENSING NOZZLE, BALANCE TYPE PHASE II CONTROL, GASOLINE A/N: 469254	D1320				D330.1, J110.1
STORAGE TANK, FIXED ROOF, NO. 16E, CONVAULT TYPE (G-70-116-F), GASOLINE, 1000 GALS; WIDTH: 5 FT 8 IN; HEIGHT: 4 FT ; LENGTH: 11 FT A/N: 469254	D1321				C1.12, J109.1, J119.1
System 3: FUEL GAS MIX SYSTEM					S13.4, S15.2
DRUM, V-536, SOUTH FUEL GAS MIX, LENGTH: 40 FT ; DIAMETER: 10 FT A/N: 470245	D888				
DRUM, V-1222, NORTH FUEL GAS MIX, LENGTH: 33 FT ; DIAMETER: 12 FT A/N: 470245	D889				

- * (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 19: MISCELLANEOUS					
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470245	D1556				H23.5
System 4: SUMPS					
SUMP, FIXED ROOF, WASTE OIL RECOVERY, 10000 GALS; WIDTH: 10 FT ; HEIGHT: 10 FT ; LENGTH: 10 FT A/N: 470244	D526				E336.2, H23.40
SUMP, FIXED ROOF, NO. 29, LAB WASTEWATER, 1400 GALS; DIAMETER: 6 FT ; LENGTH: 7 FT A/N: 470147	D1095	C1096		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]; VOC: 500 PPMV (5) [RULE 1176, 9-13-1996]	E71.10, H23.40, K67.2
ADSORBER, TWO IN SERIES AND ONE STANDBY, 3 TOTAL, EACH CONTAINING 2000 POUNDS OF ACTIVATED CARBON A/N: 470147	C1096	D1095		BENZENE: (10) [40CFR 61 Subpart FF, #1, 12-4-2003]; VOC: 50 PPMV (8A) [CONSENT DECREE, 3-21-2001]; VOC: 500 PPMV (8) [40CFR 61 Subpart FF, 12-4-2003]	D90.4, E153.1, H23.40
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470147	D1572				
System 5: AMMONIA STORAGE					
STORAGE TANK, PRESSURIZED, V-1058, AMMONIA, 250 PSIG TOTAL, LENGTH: 36 FT 9 IN; DIAMETER: 9 FT A/N: 470247	D311				B59.3, E71.12, K67.10
Process 21: AIR POLLUTION CONTROL					
System 1: REFINERY FLARE					
					S13.4, S18.2

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
FLARE, ELEVATED WITH STEAM INJECTION, NO.2, Q-910, JOHN ZINK, MODEL STF-S-30, HEIGHT: 250 FT ; DIAMETER: 2 FT 6 IN A/N:	C747				D12.4, D323.2, E193.1, H23.38
FLARE, ELEVATED WITH STEAM INJECTION, NO.1, Q-913, JOHN ZINK, MODEL STF-S-30, HEIGHT: 250 FT ; DIAMETER: 2 FT 6 IN A/N:	C748				D12.4, D323.2, E193.1, H23.38
KNOCK OUT POT, V-847, FLARE NO. 2, WITH INTERNAL LIQUID SEAL, LENGTH: 24 FT ; DIAMETER: 12 FT A/N:	D752	D1648 D1651			
KNOCK OUT POT, V-848, FLARE NO. 1, WITH INTERNAL LIQUID SEAL, LENGTH: 24 FT ; DIAMETER: 12 FT A/N:	D753	D1648 D1651			
KNOCK OUT POT, V-2369, CRU-HTU NO. 1, LENGTH: 16 FT ; DIAMETER: 8 FT A/N:	D750				
KNOCK OUT POT, V-630, CRU-HTU NO. 2, LENGTH: 19 FT ; DIAMETER: 6 FT A/N:	D751				
KNOCK OUT POT, V-873, CRU NO. 3, LENGTH: 18 FT ; DIAMETER: 9 FT A/N:	D754				
KNOCK OUT POT, V-934, DCU, LENGTH: 25 FT ; DIAMETER: 12 FT A/N:	D755				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
KNOCK OUT POT, V-951, HGU NO. 1, LENGTH: 40 FT ; DIAMETER: 10 FT A/N:	D756				
KNOCK OUT POT, V-1018, HCU, LENGTH: 29 FT ; DIAMETER: 14 FT 6 IN A/N:	D757				
KNOCK OUT POT, V-1431,ALKYLATION UNIT, LENGTH: 35 FT ; DIAMETER: 11 FT A/N:	D758				
KNOCK OUT POT, V-1472, HTU NO. 3, LENGTH: 23 FT 8 IN; DIAMETER: 9 FT 3 IN A/N:	D759				
KNOCK OUT POT, V-1764, HTU-4, HEIGHT: 36 FT ; DIAMETER: 13 FT A/N:	D172				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N:	D1419				H23.5
System 2: FUME SCRUBBERS					S13.4, S18.3
SCRUBBER, V-146/V-154, HEIGHT: 25 FT 3 IN; DIAMETER: 6 FT A/N: 470257	C761				C8.3, D90.6
SCRUBBER, V-673, CAUSTIC, HEIGHT: 25 FT 6 IN; DIAMETER: 6 FT A/N: 470257	C762				C8.3, D90.6
KNOCK OUT POT, V-671, NORTH, HEIGHT: 25 FT 3 IN; DIAMETER: 6 FT A/N: 470257	D763				

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
KNOCK OUT POT, V-672, SOUTH, HEIGHT: 25 FT 3 IN; DIAMETER: 6 FT A/N: 470257	D1087				
DRUM, ACID WASH WATER, V-1214, HEIGHT: 8 FT ; DIAMETER: 2 FT 6 IN A/N: 470257	C1638				
DRUM, ACID WASH WATER, V-250, HEIGHT: 8 FT ; DIAMETER: 2 FT 6 IN A/N: 470257	C1639				
System 3: REFINERY VAPOR RECOVERY COMPRESSORS SYSTEM					S13.4, S15.11, S18.1
COMPRESSOR, C-68, INGERSOLL-RAND, TWO-STAGE, 350 H.P. A/N: 530224	D641				
COMPRESSOR, C-69, INGERSOLL-RAND, TWO-STAGE, 350 H.P. A/N: 530224	D642				H23.4
COMPRESSOR, C-104, WORTHINGTON, TWO-STAGE, 900 H.P. A/N: 530224	D643				
COMPRESSOR, C-105, WORTHINGTON, TWO-STAGE, 900 H.P, SPARE FOR C-104 A/N: 530224	D644				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
DRUM, VAPOR RECOVERY GAS K.O, V-2380, LENGTH: 11 FT ; DIAMETER: 54 FT A/N: 530224	D1662				
POT, V-556, CONDENSATE POT #4, HEIGHT: 6 FT ; DIAMETER: 3 FT A/N: 530224	D886				
DRUM, SUCTION, V-1135, LENGTH: 22 FT 6 IN; DIAMETER: 9 FT A/N: 530224	D887				
DRUM, SOUR WATER FLASH DRUM AND BACK UP DEA SKIM, V-1490, LENGTH: 30 FT ; DIAMETER: 12 FT A/N: 530224	D1615				
DRUM, DEA FLASH, V-1491, LENGTH: 40 FT ; DIAMETER: 4 FT A/N: 530224	D1663				
DRUM, DEA SKIM, V-1139, SPARE, LENGTH: 26 FT ; DIAMETER: 8 FT A/N: 530224	D1316				
POT, V-1865, CONDENSATE POT #1, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 530224	D890				
POT, V-1866, CONDENSATE POT #2, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 530224	D891				
POT, V-1867, CONDENSATE POT #3, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 530224	D892				
POT, V-1868, CONDENSATE POT #5, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 530224	D893				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
POT, V-1871, CONDENSATE POT #6, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 530224	D894				
POT, V-1872, CONDENSATE POT #7, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 530224	D895				
POT, V-1873, CONSENSATE POT #8, HEIGHT: 8 FT ; DIAMETER: 4 FT A/N: 530224	D896				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 530224	D1477				H23.5
System 4: FLARE GAS RECOVERY SYSTEM					S13.4, S15.2, S15.3, S15.11, S18.6, S31.2
COMPRESSOR, C-167, LIQUID RING TYPE, DUAL SEALS WITH BARRIER FLUID SYSTEM, 60 MSCFH CAPACITY A/N: 501291	D1600				E73.3
COMPRESSOR, C-168, LIQUID RING TYPE, DUAL SEALS WITH BARRIER FLUID SYSTEM, 60 MSCFH CAPACITY A/N: 501291	D1601				E73.3
COMPRESSOR, C-169, LIQUID RING TYPE, DUAL SEALS WITH BARRIER FLUID SYSTEM, 60 MSCFH CAPACITY A/N: 501291	D1602				E73.3

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
COMPRESSOR, C-170, LIQUID RING TYPE, DUAL SEALS WITH BARRIER FLUID SYSTEM, 60 MSCFH CAPACITY A/N: 501291	D1603				E73.3
COMPRESSOR, C-171, LIQUID RING TYPE, DUAL SEALS WITH BARRIER FLUID SYSTEM, 60 MSCFH CAPACITY A/N: 501291	D1604				E73.3
VESSEL, COMPRESSOR LIQUID SEPARATOR, V-2358, HEIGHT: 20 FT ; DIAMETER: 6 FT A/N: 501291	D1605				
VESSEL, COMPRESSOR LIQUID SEPARATOR, V-2359, HEIGHT: 20 FT ; DIAMETER: 6 FT A/N: 501291	D1606				
KNOCK OUT POT, V-2360, HEIGHT: 4 FT ; DIAMETER: 1 FT 6 IN A/N: 501291	D1607				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 501291	D1608			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	
Process 22: R-219 EXEMPT EQUIPMENT SUBJECT TO SOURCE-SPECIFIC RULES					
RULE 219 EXEMPT EQUIPMENT, AIR CONDITIONING UNITS	E1487				H23.12
RULE 219 EXEMPT EQUIPMENT, REFRIGERATION UNITS	E1488				H23.12
RULE 219 EXEMPT EQUIPMENT, COOLING TOWERS	E1489				H23.13

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 22: R-219 EXEMPT EQUIPMENT SUBJECT TO SOURCE-SPECIFIC RULES					
RULE 219 EXEMPT EQUIPMENT, LAMINATING EQUIPMENT, LOW USE OR EMISSIONS	E1491			VOC: (9) [RULE 1168, 10-3-2003; RULE 1168, 1-7-2005; RULE 1171, 11-7-2003; RULE 1171, 2-1-2008]	H23.27
RULE 219 EXEMPT EQUIPMENT, CLEANING EQUIPMENT, SMALL, UNHEATED, NON-CONVEYORIZED	E1492			VOC: (9) [RULE 1171, 11-7-2003; RULE 1171, 2-1-2008]	H23.14
RULE 219 EXEMPT EQUIPMENT, COATING EQUIPMENT, PORTABLE, ARCHITECTURAL COATINGS	E1493			VOC: (9) [RULE 1113, 11-8-1996; RULE 1113, 7-13-2007; RULE 1171, 11-7-2003; RULE 1171, 2-1-2008]	K67.4
RULE 219 EXEMPT EQUIPMENT, COATING EQUIPMENT, SMALL, UNHEATED, NON-CONVEYORIZED	E1499			VOC: (9) [RULE 1107, 1-6-2006; RULE 1171, 11-7-2003; RULE 1171, 2-1-2008]	H23.27
Process 23: ISOMERIZATION					
System 1: BUTANE ISOMERIZATION					S13.2, S15.5, S31.1
VESSEL, BUTANE FEED COALESCER, V-2252, LENGTH: 8 FT ; DIAMETER: 4 FT A/N: 470311	D1514				
DRYER, V-2253/2254, BUTANE, 2 TOTAL, LENGTH: 22 FT ; DIAMETER: 4 FT A/N: 470311	D1515				
DRYER, V-55/56, MAKE UP GAS, 2 TOTAL, LENGTH: 14 FT ; DIAMETER: 4 FT A/N: 470311	D1516				
KNOCK OUT POT, V-2257, MAKE UP GAS, LENGTH: 7 FT 6 IN; DIAMETER: 2 FT A/N: 470311	D1517				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 23: ISOMERIZATION					
VESSEL, REGENERANT COALESCER, V-2258, LENGTH: 6 FT ; DIAMETER: 2 FT A/N: 470311	D1518				
TANK, SURGE, V-2259, FEED, LENGTH: 15 FT ; DIAMETER: 5 FT A/N: 470311	D1519				
SCRUBBER, V-2262, NET GAS, LENGTH: 37 FT ; DIAMETER: 78 FT A/N: 470311	D1520				
TANK, DEGASSING, V-2263, CAUSTIC, LENGTH: 10 FT ; DIAMETER: 2 FT 6 IN A/N: 470311	D1521				
VESSEL, STABILIZER, V-2260, LENGTH: 6 FT 8 IN; DIAMETER: 66 FT A/N: 470311	D1522				
VESSEL, STABILIZER RECEIVER, V-2261, LENGTH: 12 FT 6 IN; DIAMETER: 5 FT 6 IN A/N: 470311	D1523				
VESSEL, DIB OVERHEAD ACCUMULATOR, V-0012, LENGTH: 19 FT ; DIAMETER: 7 FT 6 IN A/N: 470311	D1524				
REACTOR, V-604, HEIGHT: 59 FT 6 IN; DIAMETER: 3 FT A/N: 470311	D1067				
REACTOR, V-605, HEIGHT: 12 FT ; DIAMETER: 5 FT A/N: 470311	D978				

- | | |
|---|---|
| <p>* (1) (1A) (1B) Denotes RECLAIM emission factor
 (3) Denotes RECLAIM concentration limit
 (5) (5A) (5B) Denotes command and control emission limit
 (7) Denotes NSR applicability limit
 (9) See App B for Emission Limits</p> | <p>(2) (2A) (2B) Denotes RECLAIM emission rate
 (4) Denotes BACT emission limit
 (6) Denotes air toxic control rule limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (10) See section J for NESHAP/MACT requirements</p> |
|---|---|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions * And Requirements	Conditions
Process 23: ISOMERIZATION					
COLUMN, DIB, V-1041, HEIGHT: 185 FT ; DIAMETER: 7 FT 6 IN A/N: 470311	D275				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 470311	D1562				H23.16

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

**FACILITY PERMIT TO OPERATE
TESORO REFINING AND MARKETING CO, LLC**

SECTION D: DEVICE ID INDEX

**The following sub-section provides an index
to the devices that make up the facility
description sorted by device ID.**

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1	1	1	1
D3	36	4	7
D4	2	1	1
D5	2	1	2
D6	2	1	2
D7	2	1	2
D8	2	1	2
D9	3	1	3
D10	4	2	1
D11	4	2	1
D13	16	2	10
D14	16	2	10
D15	5	2	1
D16	5	2	1
D17	5	2	1
D18	5	2	1
D19	8	2	1
D20	6	2	1
D24	6	2	1
D25	6	2	1
D26	6	2	1
D27	7	2	1
D28	7	2	1
D29	7	2	1
D30	7	2	1
D31	7	2	1
D32	9	2	2
D33	9	2	2
D34	13	2	8
D41	13	2	8
D45	13	2	8
D47	14	2	8
D49	13	2	8
S50	24	3	3
S51	28	3	6

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D52	10	2	3
D53	11	2	6
D54	10	2	3
D56	10	2	3
D58	10	2	3
D60	10	2	3
D62	10	2	3
D63	11	2	6
D65	11	2	6
D66	80	12	8
D67	80	12	8
D68	11	2	6
D76	12	2	7
D77	12	2	7
D78	17	3	1
D79	17	3	1
D80	17	3	1
D81	17	3	1
D82	18	3	1
D83	18	3	1
D84	18	3	1
D85	18	3	1
D86	18	3	1
D87	19	3	1
D89	23	3	3
D90	24	3	3
D91	24	3	3
D92	23	3	3
D93	20	3	2
D94	20	3	2
D95	20	3	2
D96	21	3	2
D97	21	3	2
D99	24	3	4
D100	24	3	4

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D102	59	8	1
D103	26	3	5
D104	25	3	4
D105	25	3	4
D106	37	4	7
D107	25	3	5
D112	29	3	9
D114	30	4	1
D115	30	4	1
D117	30	4	1
D120	31	4	2
D121	31	4	3
D122	32	4	3
D123	32	4	3
D129	32	4	3
D130	31	4	3
D131	32	4	3
D132	33	4	3
D134	32	4	3
D140	33	4	3
D146	33	4	4
D147	33	4	5
D148	34	4	5
D149	34	4	5
D153	34	4	5
D155	35	4	5
D156	35	4	5
D157	35	4	6
D158	35	4	6
D159	34	4	5
D160	36	4	7
D161	36	4	7
D162	36	4	7
D163	36	4	7
D164	37	4	7

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D165	37	4	7
D167	37	4	7
D168	36	4	7
D169	37	4	7
D170	38	4	7
D172	137	21	1
D173	38	4	7
D174	38	4	7
D176	38	4	7
D188	38	4	7
D192	39	4	9
D194	41	5	2
D196	41	5	2
D197	42	5	3
D198	42	5	3
D199	42	5	3
D200	42	5	3
D201	42	5	3
D203	42	5	3
D209	43	5	3
D210	43	5	3
D214	45	5	4
D215	45	5	4
D216	44	5	4
D217	45	5	4
D218	44	5	4
D219	46	5	5
D220	46	5	5
D221	47	5	5
D222	47	5	5
D223	47	5	5
D224	47	5	5
D225	47	5	5
D226	47	5	5
D227	47	5	5

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D229	48	5	5
C232	80	14	1
D244	36	4	7
D245	59	8	1
D247	48	5	6
D248	48	5	6
D249	49	5	6
D250	50	5	6
D251	50	5	6
D275	144	23	1
D276	51	6	1
D305	51	6	1
D307	51	6	1
D311	135	19	5
D317	51	6	3
D319	51	6	3
D320	51	6	3
D321	52	6	3
D323	52	6	3
D333	52	6	3
D335	52	6	3
D340	54	8	1
D341	55	8	1
D342	55	8	1
D344	55	8	1
D345	55	8	1
D346	55	8	1
D347	56	8	1
D348	56	8	1
D349	56	8	1
D350	56	8	1
D351	56	8	1
D352	56	8	1
D355	57	8	1
D356	57	8	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D357	57	8	1
D358	57	8	1
D359	57	8	1
D364	58	8	1
D371	54	8	1
D372	54	8	1
D373	54	8	1
D374	55	8	1
D375	56	8	1
D376	57	8	1
D377	58	8	1
D384	59	8	2
D385	60	8	2
D386	60	8	2
D387	61	8	2
D388	61	8	2
D390	62	9	1
D391	62	9	1
D392	62	9	1
D393	62	9	1
D394	63	9	1
D395	63	9	1
D396	63	9	1
D397	63	9	1
D399	63	9	1
D400	63	9	1
D401	63	9	1
D402	63	9	1
D403	64	9	1
D404	64	9	1
D405	64	9	1
D406	64	9	1
D407	64	9	1
D408	64	9	1
D409	64	9	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D410	64	9	1
D411	65	9	1
D413	65	9	1
D414	65	9	1
D415	65	9	1
D416	65	9	1
D417	65	9	1
D418	66	9	1
D419	66	9	1
D420	66	9	1
D421	66	9	1
D422	66	9	1
D423	66	9	1
D424	66	9	1
D425	66	9	1
D431	67	9	1
D432	67	9	1
D434	68	9	2
D435	68	9	2
D436	69	9	2
D437	69	9	2
D439	70	9	3
D440	69	9	3
D442	69	9	3
D445	69	9	2
D449	69	9	3
D450	69	9	3
D453	70	11	1
D454	70	11	1
D457	70	11	1
D458	71	12	1
D459	71	12	1
D460	71	12	1
D461	71	12	1
D462	72	12	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D463	72	12	1
D464	72	12	1
D465	72	12	1
D466	71	12	1
D467	72	12	1
D469	74	12	1
D471	73	12	1
C472	73	12	1
C473	73	12	1
D498	77	12	2
D502	38	4	7
D505	80	14	1
D507	81	14	2
D513	81	14	3
D515	83	14	9
D520	83	15	1
D521	83	15	1
D523	83	15	1
D524	83	15	1
D526	135	19	4
D527	103	15	4
D528	103	15	4
D531	84	15	1
D533	84	15	1
D534	84	15	1
D543	84	15	1
D544	84	15	1
D546	84	15	1
D547	84	15	1
D548	85	15	1
D549	85	15	1
D550	85	15	1
D551	85	15	1
D552	85	15	1
D553	85	15	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D554	85	15	1
D555	86	15	1
D556	86	15	1
D557	86	15	1
D558	86	15	1
D559	86	15	1
D560	86	15	1
D561	86	15	1
D562	87	15	1
D563	87	15	1
D564	87	15	1
D565	87	15	1
D566	87	15	1
D567	87	15	1
D568	96	15	1
D569	87	15	1
D571	88	15	1
D572	88	15	1
D573	88	15	1
D574	88	15	1
D575	88	15	1
D576	88	15	1
D577	88	15	1
D578	88	15	1
D579	89	15	1
D581	89	15	1
D582	89	15	1
D583	89	15	1
D584	89	15	1
D585	89	15	1
D586	97	15	1
D587	89	15	1
D588	90	15	1
D589	90	15	1
D591	90	15	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D592	90	15	1
D593	121	15	7
D594	90	15	1
D595	90	15	1
D596	91	15	1
D597	91	15	1
D598	95	15	1
D599	122	15	7
D600	91	15	1
D602	91	15	1
D603	123	15	7
D604	91	15	1
D605	91	15	1
D606	92	15	1
D607	92	15	1
D608	92	15	1
D609	92	15	1
D610	92	15	1
D611	93	15	1
D612	93	15	1
D613	118	15	7
D614	119	15	7
D615	93	15	1
D616	93	15	1
D617	120	15	7
D618	116	15	7
D619	93	15	1
D620	93	15	1
D621	116	15	7
D622	93	15	1
D623	94	15	1
D624	124	15	7
D625	94	15	1
D626	94	15	1
D627	94	15	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D628	94	15	1
D629	95	15	1
D630	117	15	7
D631	95	15	1
D632	97	15	1
D633	95	15	1
D634	95	15	1
D635	97	15	1
D636	95	15	1
D637	96	15	1
D639	96	15	1
D640	83	15	1
D641	138	21	3
D642	138	21	3
D643	138	21	3
D644	138	21	3
D647	98	15	2
D648	103	15	5
D649	110	15	5
D650	104	15	5
D651	113	15	5
D652	105	15	5
D653	106	15	5
D654	111	15	5
D655	112	15	5
D656	107	15	5
D657	75	12	2
D658	114	15	5
D659	108	15	5
D660	110	15	5
D662	98	15	3
D663	99	15	3
D664	99	15	3
D665	99	15	3
D666	99	15	3

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D667	99	15	3
D669	99	15	3
D670	100	15	3
D671	100	15	3
D672	100	15	3
D673	100	15	3
D674	100	15	3
D675	100	15	3
D676	101	15	3
D677	101	15	3
D678	101	15	3
D679	101	15	3
D680	101	15	3
D681	101	15	3
D682	102	15	3
D683	102	15	3
D684	102	15	3
D685	102	15	3
D686	102	15	3
D688	76	12	2
D689	77	12	2
S692	61	8	2
D693	77	12	2
D696	76	12	2
D697	78	12	3
D698	78	12	3
C699	78	12	3
D700	78	12	4
D701	78	12	4
C702	78	12	4
D703	74	12	1
D709	74	12	1
D713	124	17	1
D714	125	17	1
D722	132	18	0

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D723	133	18	0
D724	133	18	0
D725	133	18	0
D728	134	19	1
D734	134	19	1
C747	136	21	1
C748	136	21	1
D749	21	3	2
D750	136	21	1
D751	136	21	1
D752	136	21	1
D753	136	21	1
D754	136	21	1
D755	136	21	1
D756	137	21	1
D757	137	21	1
D758	137	21	1
D759	137	21	1
C761	137	21	2
C762	137	21	2
D763	137	21	2
C764	3	1	3
C768	9	2	2
D770	39	4	8
C771	39	4	8
C773	46	5	4
C775	49	5	6
D777	53	6	4
C778	53	6	4
D780	51	6	1
D781	51	6	1
C784	60	8	2
C786	61	8	2
C788	62	8	2
D790	82	14	4

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D798	82	14	5
D807	74	12	1
D808	74	12	1
D809	74	12	1
D810	130	17	2
C811	130	17	2
D812	131	17	3
C813	132	17	3
S874	133	18	0
D886	139	21	3
D887	139	21	3
D888	134	19	3
D889	134	19	3
D890	139	21	3
D891	139	21	3
D892	139	21	3
D893	139	21	3
D894	140	21	3
D895	140	21	3
D896	140	21	3
D898	1	1	1
D900	6	2	1
D901	8	2	1
D904	8	2	1
D906	6	2	1
D907	10	2	3
D908	17	3	1
D909	19	3	1
D910	19	3	1
D912	19	3	1
D913	19	3	1
D915	17	3	1
D916	22	3	2
D917	22	3	2
D918	19	3	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D919	21	3	2
D922	51	6	1
D923	51	6	1
D928	57	8	1
D930	58	8	1
D932	58	8	1
D933	58	8	1
D934	58	8	1
D949	65	9	1
D950	65	9	1
D953	67	9	1
D954	67	9	1
D959	68	9	1
D960	67	9	1
D961	67	9	1
D969	8	2	1
D973	130	17	2
D973	132	17	3
D976	40	5	1
D977	40	5	1
D978	143	23	1
D979	40	5	1
D980	40	5	1
D982	96	15	1
S987	9	2	2
S989	39	4	8
S990	46	5	4
S992	49	5	6
S993	54	6	4
S994	60	8	2
S995	62	8	2
D998	76	12	2
D1001	76	12	2
D1002	76	12	2
D1022	77	12	2

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1023	77	12	2
S1028	133	18	0
D1040	82	14	5
D1061	40	5	1
D1067	143	23	1
D1071	40	5	1
D1078	109	15	5
D1080	67	9	1
D1081	67	9	1
D1082	67	9	1
D1087	138	21	2
D1088	7	2	1
D1093	15	2	9
D1094	15	2	9
D1095	135	19	4
C1096	135	19	4
D1100	125	17	1
D1101	125	17	1
D1102	125	17	1
D1103	125	17	1
D1104	126	17	1
S1105	28	3	6
D1112	38	4	7
D1120	42	5	3
D1121	47	5	5
D1122	54	6	4
D1125	1	1	1
D1126	1	1	1
D1127	1	1	1
D1128	1	1	1
D1129	1	1	1
D1131	2	1	1
D1132	4	2	1
D1133	4	2	1
D1134	4	2	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1135	4	2	1
D1136	5	2	1
D1137	5	2	1
D1141	5	2	1
D1143	5	2	1
D1147	6	2	1
D1149	7	2	1
D1151	7	2	1
D1152	11	2	6
D1154	10	2	3
D1155	12	2	8
D1156	12	2	8
D1157	13	2	8
D1158	13	2	8
D1159	13	2	8
D1160	12	2	8
D1161	14	2	8
D1162	14	2	8
D1164	14	2	8
D1165	14	2	8
D1170	15	2	9
D1173	16	2	9
D1174	16	2	9
D1175	16	2	9
D1176	16	2	9
D1180	29	4	1
D1182	29	4	1
D1183	29	4	1
D1184	30	4	1
D1187	33	4	3
D1188	33	4	3
D1189	34	4	5
D1191	34	4	5
D1194	35	4	5
D1195	35	4	7

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1197	41	5	3
D1198	41	5	3
D1199	41	5	3
D1200	42	5	3
D1203	43	5	3
D1204	43	5	3
D1205	43	5	3
D1206	43	5	3
D1207	43	5	3
D1208	46	5	5
D1209	46	5	5
D1210	46	5	5
D1212	48	5	5
D1213	48	5	5
D1217	50	6	1
D1255	52	6	3
D1256	52	6	3
D1257	52	6	3
D1258	52	6	3
D1259	55	8	1
D1260	55	8	1
D1265	57	8	1
D1266	58	8	1
D1267	17	3	1
D1268	17	3	1
D1269	17	3	1
D1271	18	3	1
D1272	19	3	1
D1273	18	3	1
D1275	18	3	1
D1280	19	3	1
D1283	20	3	2
D1284	20	3	2
D1285	22	3	2
D1287	22	3	2

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1288	22	3	2
D1289	22	3	2
D1292	25	3	4
D1293	25	3	5
D1294	25	3	5
D1295	25	3	5
D1296	25	3	5
D1297	26	3	5
D1298	69	9	2
D1301	70	11	1
D1304	73	12	1
D1305	75	12	1
D1306	75	12	1
D1307	75	12	1
D1308	75	12	1
D1316	139	21	3
D1320	134	19	2
D1321	134	19	2
D1326	36	4	7
D1332	31	4	1
D1333	33	4	3
D1334	37	4	7
D1335	37	4	7
D1336	38	4	7
D1337	40	5	1
D1338	40	5	1
D1339	52	6	3
D1340	58	8	1
D1341	58	8	1
D1342	59	8	1
D1343	31	4	1
D1350	11	2	6
D1351	30	4	1
D1354	2	1	1
D1355	2	1	2

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
S1356	3	1	3
D1357	8	2	1
D1359	10	2	3
D1361	11	2	6
D1362	114	15	5
D1363	117	15	7
D1365	20	3	1
D1366	22	3	2
D1367	12	2	7
D1380	39	4	9
D1381	40	5	1
D1384	48	5	5
D1392	68	9	1
D1399	78	12	3
D1415	131	17	2
D1416	133	18	0
D1419	137	21	1
D1425	132	17	3
D1438	12	2	8
D1443	25	3	4
D1444	26	3	5
D1446	31	4	1
D1447	33	4	3
D1448	35	4	5
D1449	39	4	7
D1451	44	5	3
D1453	52	6	3
D1454	59	8	1
D1455	69	9	2
D1456	70	9	3
D1458	70	11	1
D1459	75	12	1
D1460	77	12	2
D1461	78	12	4
D1465	81	14	2

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1466	81	14	3
D1467	82	14	4
D1469	83	14	9
D1470	97	15	1
D1471	98	15	2
D1472	102	15	3
D1473	134	19	1
D1477	140	21	3
D1478	3	1	4
D1479	3	1	4
D1480	79	12	7
D1481	79	12	7
D1482	79	12	7
D1483	79	12	7
D1484	79	12	7
D1485	79	12	7
E1487	141	22	0
E1488	141	22	0
E1489	141	22	0
E1491	142	22	0
E1492	142	22	0
E1493	142	22	0
D1495	75	12	1
D1496	77	12	2
E1499	142	22	0
D1500	96	15	1
D1501	43	5	3
D1502	102	15	3
D1503	37	4	7
D1504	68	9	1
D1505	68	9	1
D1506	68	9	1
D1507	68	9	1
D1508	30	4	1
D1509	68	9	1

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1510	30	4	1
D1511	32	4	3
D1512	32	4	3
D1513	32	4	3
D1514	142	23	1
D1515	142	23	1
D1516	142	23	1
D1517	142	23	1
D1518	143	23	1
D1519	143	23	1
D1520	143	23	1
D1521	143	23	1
D1522	143	23	1
D1523	143	23	1
D1524	143	23	1
D1525	43	5	3
D1526	44	5	3
D1527	44	5	3
D1530	59	8	1
D1531	59	8	1
D1532	21	3	2
D1533	114	15	6
C1536	131	17	2
C1538	132	17	3
D1553	82	14	5
D1555	96	15	1
D1556	135	19	3
D1557	16	2	10
D1561	80	12	8
D1562	144	23	1
D1566	38	4	7
D1567	8	2	1
D1572	135	19	4
D1573	28	3	8
C1574	29	3	8

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC
 SECTION D: DEVICE ID INDEX**

Device Index For Section D			
Device ID	Section D Page No.	Process	System
C1575	26	3	6
C1576	27	3	6
C1577	28	3	6
D1580	28	3	6
D1597	20	3	1
D1598	20	3	1
D1600	140	21	4
D1601	140	21	4
D1602	140	21	4
D1603	141	21	4
D1604	141	21	4
D1605	141	21	4
D1606	141	21	4
D1607	141	21	4
D1608	141	21	4
D1615	139	21	3
D1616	8	2	1
D1617	126	17	1
D1618	127	17	1
C1638	138	21	2
C1639	138	21	2
D1645	127	17	1
D1646	128	17	1
D1648	130	17	2
D1651	132	17	3
D1652	56	8	1
D1661	6	2	1
D1662	139	21	3
D1663	139	21	3
D1664	24	3	3
D1668	34	4	5
D1669	34	4	5
D1670	114	15	6
D1671	115	15	6
D1672	115	15	6

**FACILITY PERMIT TO OPERATE
 TESORO REFINING AND MARKETING CO, LLC**

SECTION D: DEVICE ID INDEX

Device Index For Section D			
Device ID	Section D Page No.	Process	System
D1673	115	15	6
D1682	4	1	4
D1683	79	12	7
D1684	11	2	6
D1690	1	1	1
D1692	128	17	1
D1693	129	17	1
D1694	129	17	1
D1698	12	2	8
D1699	15	2	9
D1712	115	15	6
D1719	98	15	2

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

FACILITY CONDITIONS

F9.1 Except for open abrasive blasting operations, the operator shall not discharge into the atmosphere from any single source of emissions whatsoever any air contaminant for a period or periods aggregating more than three minutes in any one hour which is:

(a) As dark or darker in shade as that designated No.1 on the Ringelmann Chart, as published by the United States Bureau of Mines; or

(b) Of such opacity as to obscure an observer's view to a degree equal to or greater than does smoke described in subparagraph (a) of this condition.

[RULE 401, 3-2-1984; RULE 401, 11-9-2001]

F14.1 The operator shall not purchase diesel fuel containing sulfur compounds in excess of 15 ppm by weight as supplied by the supplier.

This condition shall become effective on or after June 1, 2004.

[RULE 431.2, 5-4-1990; RULE 431.2, 9-15-2000]

F24.1 Accidental release prevention requirements of Section 112(r)(7):

a). The operator shall comply with the accidental release prevention requirements pursuant to 40 CFR Part 68 and shall submit to the Executive Officer, as a part of an annual compliance certification, a statement that certifies compliance with all of the requirements of 40 CFR Part 68, including the registration and submission of a risk management plan (RMP).

b). The operator shall submit any additional relevant information requested by the Executive Officer or designated agency.

**FACILITY PERMIT TO OPERATE
TESORO REFINING AND MARKETING CO, LLC**

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[40CFR 68 - Accidental Release Prevention, 5-24-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

F25.1 The permit holder of this facility shall not install, alter, or operate a refinery process unit or other non-Rule 219 exempt equipment without a valid RECLAIM/Title V permit issued by the AQMD pursuant to Rule 201 - Permit to Construct, Rule 203 - Permit to Operate, Rule 2004 - Requirements, and Rule 3002 - Requirements, as applicable.

Notwithstanding the above, the provisions of Rules 201, 203, 2004, and 3002 shall not apply to installations or alterations that involve only the equipment listed in Table 1 below, nor shall they apply to the operation of equipment listed in Table 1, when directly associated with permitted process units or other permitted equipment.

Notwithstanding the above, all new equipment listed in Table 1, including associated fugitive components installed with such equipment, shall have Best Available Control Technology installed in conformance with the Best Available Control Technology Guidelines in effect at the time of the installation.

TABLE 1

- (a) Heat Exchanger (including air-cooler, reboiler, cooler, condenser, and shell and tube exchanger)
- (b) In-line Mixer
- (c) Pump
- (d) Knockout Pot - Compressor inlet (immediate inlet) and interstage
- (e) Knockout Pot - Fuel Gas System (downstream of fuel gas mix drums)

This condition applies only to the facility that processes petroleum as defined in the Standard Industrial Classification Manual as Industry No. 2911 - Petroleum Refining, as well as its directly associated sulfur recovery plant which may be located outside of the facility.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 2004, 5-11-2001; RULE 2004, 4-6-2007]

F34.1 The operator shall not sell refinery gas containing sulfur compounds in excess of 40 ppmv, calculated as hydrogen sulfide, averaged over 4-hour period.

[RULE 431.1, 6-12-1998]

F52.1 This facility is subject to the applicable requirements of the following rules or regulation(s):

40CFR79

40CFR80

[40CFR 79, 7-1-1999; 40CFR 80, 7-1-1999]

F52.2 This facility is subject to the applicable requirements of the following rules or regulation(s):

40CFR61, Subpart FF

[40CFR 61 Subpart FF, 12-4-2003]

F52.3 This facility is subject to the applicable requirements of the following rules or regulation(s):

40CFR60 Subpart A

40CFR61 Subpart A

40CFR63 Subpart A

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[40CFR 60 Subpart A, 6-13-2007; 40CFR 61 Subpart A, 5-16-2007; 40CFR 63 Subpart A, 5-16-2007]

F52.4 This facility is subject to the applicable requirements of the following rules or regulation(s):

Consent Decree Civil No. H-01-0978, 3-21-2001

[CONSENT DECREE, 3-21-2001]

F60.1 The emission limits identified in Section D and H of the permit shall be defined as emissions discharged to the atmosphere from the originating equipment.

PROCESS CONDITIONS

P13.1 All devices under this process are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
Benzene	40CFR61, SUBPART	FF

[40CFR 61 Subpart FF, 12-4-2003]

[Processes subject to this condition : 1, 2, 3, 4, 5, 6, 8, 9, 11, 12, 15]

SYSTEM CONDITIONS

S1.1 The operator shall limit the loading rate to no more than 1262500 barrel(s) in any one year.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

For the purpose of this condition, loading rate shall be defined as the combined loading rate of D790 in Process 14, System 4 and D1040 in Process 14, System 5, and shall be recorded by shipping records.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 14, System 4 , 5]

S2.1 The operator shall limit emissions from this system as follows

CONTAMINANT	EMISSIONS LIMIT
VOC	Less than 2.5 lbs/mmscf of hydrogen produced

[RULE 1189, 1-21-2000]

[Systems subject to this condition : Process 6, System 1 , 3]

S7.1 The following conditions shall apply to all coke handling and related devices from this system:

The operator shall drive all outgoing petroleum coke trucks, whether filled or empty, through the truck wash system in order to thoroughly wash any residual coke off the exterior of the trucks.

The operator shall clean or wet down the ground area below the conveyors to prevent airborne dust.

The operator shall wash exterior conveyors and return belts, overhead structures and ground area down to the coke laden water return system to avoid accumulation of coke dust.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[**RULE 1158, 6-11-1999**; RULE 1158, 7-11-2008]

[Systems subject to this condition : Process 2, System 8]

S7.2 The following conditions shall apply to all coke handling and related devices from this system:

The operator shall drive all outgoing petroleum coke trucks, whether filled or empty, through the truck wash system in order to thoroughly wash any residual coke off the exterior of the trucks.

The operator shall clean or wet down the ground area below the conveyors to prevent airborne dust.

The operator shall wash exterior conveyors and return belts, overhead structures and ground area down to the coke laden water return system to avoid accumulation of coke dust.

The operator shall drain raw coke from the coker pit before loading to the conveyor hopper to minimize spillage of coke from elevated inclined conveyors.

[**RULE 1158, 6-11-1999**; RULE 1158, 7-11-2008]

[Systems subject to this condition : Process 2, System 9]

S11.2 The operator shall comply with all applicable mitigation measures stipulated in the "Statement of Findings, Statement of Overriding Considerations, and Mitigation Monitoring Plan" document which is part of the AQMD Certified Final Environmental Impact Report dated 15-oct-2001 for this facility.

This condition shall only apply to equipment listed in Section H of this facility permit.

[CA PRC CEQA, 11-23-1970]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Systems subject to this condition : Process 4, System 3 , 7]

S11.3 The operator shall comply with all applicable mitigation measures stipulated in the "Statement of Findings, Statement of Overriding Considerations, and Mitigation Monitoring Plan" document which is part of the AQMD Certified Final Environmental Impact Report dated 04-10-2009 for this facility.

This condition shall only apply to equipment listed in Section H of this facility permit.

[CA PRC CEQA, 11-23-1970]

[Systems subject to this condition : Process 17, System 4]

S13.2 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	QQQ

[40CFR 60 Subpart QQQ, 10-17-2000]

[Systems subject to this condition : Process 4, System 7; Process 6, System 3; Process 12, System 1 , 2; Process 23, System 1]

S13.3 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
PM	District Rule	1158

[RULE 1158, 6-11-1999; RULE 1158, 7-11-2008]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Systems subject to this condition : Process 2, System 8 , 9]

S13.4 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1123

[RULE 1123, 12-7-1990]

[Systems subject to this condition : Process 1, System 1 , 2; Process 2, System 1 , 3 , 6 , 7 , 10; Process 3, System 1 , 2 , 4 , 5; Process 4, System 1 , 3 , 5 , 7 , 9; Process 5, System 1 , 3 , 5; Process 6, System 1 , 3; Process 8, System 1; Process 9, System 1 , 2 , 3; Process 12, System 8; Process 19, System 3; Process 21, System 1 , 2 , 3 , 4]

S13.5 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1176

[RULE 1176, 9-13-1996]

[Systems subject to this condition : Process 12, System 1 , 2 , 3 , 4 , 7; Process 19, System 4]

S13.6 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1149
VOC	District Rule	463

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 463, 5-6-2005]

[Systems subject to this condition : Process 15, System 3]

S13.7 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	463
VOC	District Rule	1178
VOC	District Rule	1149

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Systems subject to this condition : Process 15, System 1 , 2 , 7]

S13.8 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	461

[RULE 461, 6-3-2005; RULE 461, 3-7-2008]

[Systems subject to this condition : Process 19, System 1 , 2]

S13.9 All devices under this system are subject to the applicable requirements of the following rules or regulations:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	463
VOC	District Rule	1178
VOC	District Rule	1149

For Rule 463 applicability, only subdivision (d) in the March 11,1994 amendment, or equivalent requirements in the future amendments, shall apply to domed external floating roof tanks. This does not preclude any requirements specified in Rule 1178

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Systems subject to this condition : Process 15, System 5]

S15.1 The vent gases from all affected devices of this process/system shall be vented as follows:

All emergency vent gases shall be directed to a blowdown flare system.

This process/system shall not be operated unless the refinery flare system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 15, System 3]

S15.2 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All emergency vent gases shall be directed to the refinery flares (process 21, system 1) or flare gas recovery system (process 21, system 4) which may also include DCU Blowdown Compressor C-137 (device D68) except Devices IDs D898, D20, D910, D1268, D1269, D1280, D93, D94, D96, D1283, D1284, D1288, D1292, D219, D226, D1212, D275, D1256, D375, D928, D1267 & D916 that vent to the atmosphere.

This process/system shall not be operated unless the blowdown flare system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 1, System 1, 2; Process 2, System 1, 3, 6, 10; Process 3, System 1, 2, 5; Process 4, System 1, 3, 5, 7, 9; Process 5, System 1, 3, 5; Process 6, System 1, 3; Process 8, System 1; Process 9, System 1, 2, 3; Process 12, System 8; Process 19, System 3; Process 21, System 4]

S15.3 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to a vapor recovery system (process 21, system 3) consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases or the flare gas recovery system (process 21, system 4).

This process/system shall not be operated unless the vapor recovery system (process 21, system 3) or flare gas recovery system (process 21, system 4) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 1, System 2; Process 2, System 3, 6; Process 3, System 2, 4; Process 4, System 1, 3, 5, 7; Process 5, System 1, 3, 5; Process 6, System 1; Process 8, System 1; Process 9, System 2; Process 21, System 4]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

S15.5 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to a vapor recovery system consisting of compressors, D641, 642, 643, and/or 644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases, except devices D305, 432, 1504-1507, 1514-1524 that vent to the flare system.

This process/system shall not be operated unless the vapor recovery system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 9, System 1; Process 23, System 1]

S15.6 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to a vapor recovery system consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases.

This process/system shall not be operated unless the blowdown vapor recovery system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 12, System 7; Process 14, System 4 , 5]

S15.7 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All vent gases under normal operating conditions shall be directed to to the fume scrubber system (P21, S2), and then to the boiler system (P18) with at least one of four boilers (D722-5) in operation.

This process/system shall not be operated unless the above air pollution control system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 14, System 1; Process 15, System 4]

S15.8 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to the flare system.

This process/system shall not be operated unless the flare(s) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 14, System 3]

S15.9 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All vent gases under normal operating conditions shall be directed to a vapor recovery system (process 21 system 3) consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases, or the flare gas recovery system (process 21, system 4) except Device D1151 that vents to the atmosphere.

This process/system shall not be operated unless the vapor recovery system(process 21, system3) or flare gas recovery system (process 21, system 4) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 1]

S15.10 The vent gases from all affected devices of this process/system shall be vented as follows:

All sour gases under normal operating conditions shall be directed to the amine absorber(s) located in this system.

This process/system shall not be operated unless the absorber(s) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 1; Process 4, System 7; Process 8, System 1]

S15.11 The vent gases from all affected devices of this process/system shall be vented as follows:

All sour gases under normal operating conditions shall be directed to the fuel gas treating system(s) (Process 12, System 8 or Process 4, System 9).

This process/system shall not be operated unless the fuel gas treating system(s) is in full use and has a valid permit to receive vent gases from this system.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 6; Process 21, System 3 , 4]

S15.12 The vent gases from all affected devices of this process/system shall be vented as follows:

All sour gases under normal operating conditions shall be directed to the FCCU gas treating system.

This process/system shall not be operated unless the FCCU gas treating system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 3, System 1 , 2]

S15.13 The vent gases from all affected devices of this process/system shall be vented as follows:

All sour gases under normal operating conditions shall be directed to the fuel gas treating system (Process 4, System 9) or to the scrubber located in Process 8, System 1.

This process/system shall not be operated unless the fuel gas treating system or the scrubber is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 4, System 1 , 3 , 5]

S15.14 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All vent gases under normal operating conditions shall be directed to the propane storage tanks or the flare gas recovery system (Process 21, System 4).

All emergency vent gases shall be directed to the flare recovery system (Process 21, System 4).

This process/system shall not be operated unless the flare gas recovery system (Process 21, System 4) is in full use and has a valid permit to receive vent gases from this system

[RULE 1303(a), 12-6-2002; **RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996;** RULE 1303(b)(2)-Offset, 12-6-2002]

[Systems subject to this condition : Process 14, System 2]

- S18.1 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Crude Distillation Unit (Process: 1, System: 1 & 2)

Delayed Coking Unit (DCU) (Process: 2, System: 1, 3, 6 & 10)

Fluid Catalytic Cracking Unit (FCCU) (Process: 3, System: 1, 2, 4 & 5)

Hydrotreating Units (Process: 4, System: 1, 3, 5, 7 & 9)

Catalytic Reforming Units (Process: 5, System: 1, 3 & 5)

Hydrogen Generation Units (Process: 6, System: 1 & 3)

Hydrocracking Unit (Process: 8, System: 1)

Alkylation Unit (Process: 9, System: 1, 2 & 3)

Treating/Stripping Units (Process: 12, System: 1 & 7)

Loading/Unloading (Process: 14, System: 4 & 5)

Isomerization Unit (Process: 23, System: 1)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 3]

S18.2 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Crude Distillation Unit (Process: 1, System: 1 & 2)

Delayed Coking Unit (DCU) (Process: 2, System: 1, 3, 6 & 10)

Fluid Catalytic Cracking Unit (FCCU) (Process: 3, System: 1, 2, 4 & 5)

Hydrotreating Units (Process: 4, System: 1, 3, 5, 7 & 9)

Catalytic Reforming Units (Process: 5, System: 1, 3 & 5)

Hydrogen Generation Units (Process: 6, System: 1 & 3)

Hydrocracking Unit (Process: 8, System: 1)

Alkylation Unit (Process: 9, System: 1, 2 & 3)

Fuel Gas Treating System (Process: 12, System: 8)

Loading and Unloading (Process: 14, System: 2 & 3)

Pressurized Storage Tanks (Process: 15, System: 3)

Fuel Gas Mix System (Process: 19, System: 3)

Isomerization Unit (Process: 23, System: 1)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 1]

S18.3 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Inorganic Chemical Loading and Unloading (Process: 14, System: 1)

Miscellaneous Storage Tanks (Process: 15, System: 4)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 2]

S18.4 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

DCU Blowdown Recovery System (Process: 2, System: 6)

Refinery Vapor Recovery System (Process: 21, System: 3)

Flare Gas Recovery System (Process: 21, System: 4)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 4, System 9; Process 12, System 8]

S18.5 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FCCU Recovery System (Process: 3, System: 1)

FCCU Cracking Section (Process: 3, System: 2)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 3, System 5]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

S18.6 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

Crude Distillation Unit (Process: 1, System: 1 & 2)

Delayed Coking Unit (DCU) (Process: 2, System: 1, 3, 6 & 10)

Fluid Catalytic Cracking Unit (FCCU) (Process: 3, System: 1, 2, 4 & 5)

Hydrotreating Units (Process: 4, System: 1, 3, 5, 7 & 9)

Catalytic Reforming Units (Process: 5, System: 1, 3 & 5)

Hydrogen Generation Units (Process: 6, System: 1 & 3)

Hydrocracking Unit (Process: 8, System: 1)

Alkylation Unit (Process: 9, System: 1, 2 & 3)

Treating/Stripping Units (Process: 12, System: 1 & 7)

Loading/Unloading (Process: 14, System: 4 & 5)

Isomerization Unit (Process: 23, System: 1)

Two-Position propane truck loading (Process: 14, System: 2)

[RULE 1118, 11-4-2005; RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 4]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

S31.1 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 347559, 347560, 347564, 366048, 366083, 376616, 376622, 376623, 376624, 376625, 376627, 376628, 381228, 435139, 457927, 501287 & 501288:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All open-ended valves shall be equipped with cap, blind flange, plug, or a second valve.

All pressure relief valves shall be connected to closed vent system or equipped with rupture disc.

All sampling connections shall be closed-purge, closed-loop, or closed-vent system.

All new valves in VOC service shall be of leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where failures could pose safety hazards (e.g. drain valves with valve stems in horizontal position), retrofits with space limitations, and valves not commercially available.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppm for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the executive officer. This condition does not apply to leakless valves.

The operator shall keep records of the monthly inspection (and quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

The operator shall provide to the District, no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

All new components in VOC service as defined in Rule 1173, except valves and flanges, shall be inspected quarterly using EPA reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellow or equivalent as approved in writing by the District prior to installation.

Components shall be defined as any valve, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempt by Rule 1173.

All new components in VOC service, a leak greater than 500 ppm but less than 1,000 ppm measured as methane above background as measured using EPA Method 21, shall be repaired within 14 days of detection.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 2, System 1; Process 3, System 1; Process 4, System 1, 3, 7; Process 5, System 1, 3, 5; Process 6, System 1; Process 8, System 1; Process 9, System 1; Process 15, System 3; Process 23, System 1]

S31.2 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 501291, 494382 & 472872:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All new valves and major components in VOC service as defined by Rule 1173, except those specifically exempted by Rule 1173 and those in heavy liquid service as defined in Rule 1173, shall be distinctly identified from other components through their tag numbers (e.g. numbers ending in the letter "N"), and shall be noted in the records.

All open-ended valves shall be equipped with cap, blind flange, plug, or a second valve.

All pressure relief valves shall be connected to closed vent system or equipped with rupture disc.

All sampling connections shall be closed-purge, closed-loop, or closed-vent system.

All new components in VOC service as defined in Rule 1173, except valves and flanges, shall be inspected quarterly using EPA reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21.

All new components in VOC service, a leak greater than 500 ppm but less than 1,000 ppm measured as methane above background as measured using EPA Method 21, shall be repaired within 14 days of detection.

All new valves in VOC service shall be leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion applications where failures could pose safety hazards (e.g. drain valves with valve stems in horizontal position), retrofits with space limitations, and valves not commercially available.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppm for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the executive officer. This condition does not apply to leakless valves.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall keep records of the monthly inspection (and quarterly where applicable), subsequent repair, and re-inspection, in a manner approved by the District.

The operator shall provide to the District no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellow or equivalent as approved in writing by the District prior to installation.

Components shall be defined as any valve, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempt by Rule 1173.

[RULE 1303(a)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 4]

S31.3 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 470262, 470291, 484368 & 484369:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All open-ended valves shall be equipped with cap, blind flange, plug, or a second valve.

All pressure relief valves shall be connected to closed vent system or equipped with rupture disc.

All sampling connections shall be closed-purge, closed-loop, or closed-vent system.

All new valves in VOC service shall be of leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where failures could pose safety hazards (e.g. drain valves with valve stems in horizontal position), retrofits with space limitations, and valves not commercially available.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppm for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the Executive Officer. This condition does not apply to leakless valves.

The operator shall keep records of the monthly inspection (and quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

All new components in VOC service as defined in Rule 1173, except valves and flanges, shall be inspected quarterly using EPA reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellow or equivalent as approved in writing by the District prior to installation.

Components shall be defined as any valve, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempt by Rule 1173.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All new components in VOC service, a leak greater than 500 ppm but less than 1,000 ppm measured as methane above background as measured using EPA Method 21, shall be repaired within 14 days of detection.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 1, System 4; Process 12, System 7; Process 17, System 4]

S31.4 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 520770, 551269 & 553835:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All sampling connections shall be closed-purge, closed loop, or closed-vent systems.

All new valves in VOC service shall be leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where valve failure could pose safety hazard (e.g., drain valves with valve stems in horizontal position), retrofits/special applications with space limitations, and valves not commercially available.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellows or equivalent approved in writing by the District prior to installation.

All new components in VOC service as defined by Rule 1173, except valves and flanges shall be inspected quarterly using EPA Reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21. Components shall be defined as any valve, flange, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempted by Rule 1173.

The following leaks shall be repaired within 7 calendar days -- all light liquid/gas/vapor components leaking at a rate of 500 to 10,000 ppm, heavy liquid components leaking at a rate of 100 to 500 ppm and greater than 3 drops/minute, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 2 calendar days -- any leak between 10,000 to 25,000 ppm, any atmospheric PRD leaking at a rate of 200 to 25,000 ppm, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 1 calendar day -- any leak greater than 25,000 ppm, heavy liquid leak greater than 500 ppm, or light liquid leak greater than 3 drops per minute.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

ppmv for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the Executive Officer. This condition shall not apply to leakless valves.

The operator shall revert from quarterly to monthly inspection program if less than 98.0 percent of the new valves and the new flange population inspected are found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppmv. This condition shall not apply to leakless valves.

The operator shall keep records of the monthly inspection (quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

The operator shall provide to the District, prior to initial startup, a list of all non-leakless type valves that were installed. The list shall include the tag numbers for the valves and reasons why leakless valves were not used. The operator shall not startup the equipment prior to the Districts approval for the use of all non-leakless valves

The operator shall provide to the District, no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets or field inspection surveys for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 6; Process 9, System 1; Process 14, System 2]

S31.5 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 526722:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All sampling connections shall be closed-purge, closed loop, or closed-vent systems.

All new valves in VOC service shall be leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where valve failure could pose safety hazard (e.g., drain valves with valve stems in horizontal position), retrofits/special applications with space limitations, and valves not commercially available.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellows or equivalent approved in writing by the District prior to installation.

All new components in VOC service as defined by Rule 1173, except valves and flanges shall be inspected quarterly using EPA Reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21. Components shall be defined as any valve, flange, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempted by Rule 1173.

The following leaks shall be repaired within 7 calendar days -- all light liquid/gas/vapor components leaking at a rate of 500 to 10,000 ppm, heavy liquid components leaking at a rate of 100 to 500 ppm and greater than 3 drops/minute, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 2 calendar days -- any leak between 10,000 to 25,000 ppm, any atmospheric PRD leaking at a rate of 200 to 25,000 ppm, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 1 calendar day -- any leak greater than 25,000 ppm, heavy liquid leak greater than 500 ppm, or light liquid leak greater than 3 drops per minute.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

ppmv for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the Executive Officer. This condition shall not apply to leakless valves.

All new process drains are subject to District Rule 1176 and 40 CFR Subpart QQQ

The operator shall revert from quarterly to monthly inspection program if less than 98.0 percent of the new valves and the new flange population inspected are found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppmv. This condition shall not apply to leakless valves.

The operator shall keep records of the monthly inspection (quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

The operator shall provide to the District, prior to initial startup, a list of all non-leakless type valves that were installed. The list shall include the tag numbers for the valves and reasons why leakless valves were not used. The operator shall not startup the equipment prior to the Districts approval for the use of all non-leakless valves

The operator shall provide to the District, no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets or field inspection surveys for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Systems subject to this condition : Process 2, System 10]

S42.1 The operator shall not operate the FCCU unless the operator complies with the emission limits of the following Rule:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Contaminant	Rule	Rule/Subpart
PM10	District Rule	1105.1
NH3	District Rule	1105.1

If the operator fails to comply with any of the terms and conditions listed below, the operator shall be subject to the compliance deadlines as specified in Rule 1105.1(d) (1).

1. Award contract(s) to construct and install the control technology by April 28, 2006.
2. Commence construction phase of the control technology permitted by AQMD for compliance with Rule 1105.1(d)(1) by the later of May 1, 2006 or within 30 days of receiving permit. These dates may be extended in writing by the Executive Officer upon a request by Equilon if the CEQA document is not finalized by April 30, 2006. Such extension(s) shall not be for a period more than five months after the original deadline listed in this paragraph.
3. Start operation of the control technology permitted to ensure compliance with Rule 1105.1 (d)(1) by April 30, 2007.
4. Comply with Rule 1105.1 (d)(1) requirements no later than June 30, 2007.

[RULE 1105.1, 11-7-2003]

[Systems subject to this condition : Process 3, System 6]

DEVICE CONDITIONS

A. Emission Limits

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

A63.2 The operator shall limit emissions from this equipment as follows:

CONTAMINANT	EMISSIONS LIMIT
CO	Less than or equal to 136 LBS PER DAY
PM10	Less than or equal to 26 LBS PER DAY
ROG	Less than or equal to 26 LBS PER DAY
SOX	Less than or equal to 86368 LBS IN ANY ONE YEAR

The operator shall calculate the emission limit(s) of CO based on the AQMD certified continuous monitor pursuant to Rule 218 for all operating scenarios including normal operation, decoking, startups, shutdowns. This monitoring system shall have the capability to show the cumulative daily emissions.

The operator shall calculate the emission limit(s) of SOx by using daily emission data reported to the AQMD pursuant to Regulation XX, for any 365-day period to demonstrate exemption from PSD requirements.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D32]

A63.3 The operator shall limit emissions from this equipment as follows:

CONTAMINANT	EMISSIONS LIMIT
CO	Less than or equal to 543 LBS PER DAY

For the purposes of this condition, the limit(s) shall be based on the total combined emissions from equipment D810 and D812.

[RULE 1303(b)(2)-Offset, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D810, D812]

A63.4 The operator shall limit emissions from this equipment as follows:

CONTAMINANT	EMISSIONS LIMIT
NOX	Less than or equal to 583 TONS IN ANY ONE YEAR
SOX	Less than or equal to 430 TONS IN ANY ONE YEAR

For the purposes of this condition, the limit(s) shall be based on the total combined emissions from equipment D112, D120, D146, D214, D215, D216, D217, D218, D722, D723, D724, D725, D770, D810, D812 & D1122.

The operator shall calculate the emission limit(s) of NOx and SOx based on the certified continuous monitor, 365-day period, to demonstrate exemption from PSD requirements. This condition applies only after Clean Fuel Phase 3 fuels are in production.

[RULE 1703 - PSD Analysis, 10-7-1988]

[Devices subject to this condition : D112, D120, D146, D214, D215, D216, D217, D218, D722, D723, D724, D725, D770, D810, D812, D1122]

A63.6 The operator shall limit emissions from this equipment as follows:

CONTAMINANT	EMISSIONS LIMIT
Visible emissions	Less than or equal to 10 Percent opacity

[RULE 1158, 6-11-1999; RULE 1158, 7-11-2008]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D34, D41, D45, D47, D49, D1093, D1094, D1155, D1156, D1157, D1158, D1159, D1160, D1161, D1162, D1164, D1165, D1170, D1173, D1174, D1175, D1176, D1438, D1698, D1699]

A63.7 The operator shall limit emissions from this equipment as follows:

CONTAMINANT	EMISSIONS LIMIT
Visible emissions	Less than or equal to 30 Percent opacity

Pursuant to 40CFR60.8(c), emissions in excess of the level of the applicable emission limit (40CFR60.102(a)(2)) during periods of startup, shutdown and malfunction shall not be considered a violation of the applicable emission limit (40CFR60.102(a)(2)) unless otherwise specified in the applicable standard.

The operator shall keep records to demonstrate compliance or exemption from this condition.

[40CFR 60 Subpart J, 6-24-2008; CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

A63.10 The operator shall limit emissions from this equipment as follows:

CONTAMINANT	EMISSIONS LIMIT
CO	Less than or equal to 123 LBS PER DAY
PM	Less than or equal to 78 LBS PER DAY
ROG	Less than or equal to 67 LBS PER DAY
SOX	Less than or equal to 88493 LBS IN ANY ONE YEAR

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall calculate the emission limit(s) of CO based on the AQMD certified continuous monitor pursuant to Rule 218. This monitoring system shall have the capability to show the cumulative daily emissions.

The operator shall calculate the emission limit(s) of SO_x by using daily emission data reported to the AQMD pursuant to Regulation XX, for any 365-day period to demonstrate exemption from PSD requirements.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D9]

- A99.4 The 3.6 Lbs/hr PM₁₀ emission limit(s) shall only apply when the fresh feed to the FCCU is 30.9 thousand barrels per day or less.

For the purposes of this condition, PM₁₀ emissions shall be defined as filterable PM₁₀ collected on the cyclone exit, probe and filters of the applicable test methods referenced in the Rule.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : D96]

- A99.5 The 2.8 lb/1000 bbl fresh feed PM₁₀ emission limit(s) shall only apply when the fresh feed to the FCCU is 30.9 thousand barrels per day or more.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

For the purposes of this condition, PM10 Emissions shall be defined as filterable PM10 collected on the cyclone exit, probe and filters of the applicable test methods referenced in the Rule..

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : D96]

A99.17 The 35 PPM CO emission limit(s) shall not apply during the following periods:.

- a) Up to 2 hours during a heater shutdown, OR
- b) The time that the heater process outlet temperature reading is less than 680 degree F during a heater shutdown/startup.

However, the daily emission rate of 123 lbs/day specified in condition A63.10 shall apply at all times.

For the purposes of this condition, a heater shutdown/startup shall be defined as when the fuel gas to the heater drops below 15 MSCFH..

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D9]

A99.18 The 35 PPM CO emission limit(s) shall not apply during the following periods:.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

- a) Up to 2 hours during a heater shutdown, OR
- b) The time beginning when either (or both) process outlet temperature reading for the heater is below 850 degree F and ending when both process temperature readings (north and south) are above 850 degree F

However, the daily emission rate of 136 lbs/day specified in condition A63.2 shall apply at all times.

For the purposes of this condition, a heater shutdown/startup shall be defined as when the fuel gas to either (or both) side of the heater (north or south) drops below 15 MSCFH.

Written records of shutdowns and startups shall be maintained and made available upon request from the Executive Officer or his designee

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D32]

A195.1 The 5 PPMV NH₃ emission limit(s) is averaged over 60 minutes at 15 percent O₂ dry.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall calculate and continuously record the NH₃ slip concentration using the following: $NH_3(\text{ppmv}) = [a - b * c / 1E6] * 1E6 / b$, where a = NH₃ injection rate (lb/hr) / 17 (lb/lbmole), b = dry exhaust gas flow rate (lb/hr) / 29 (lb/lbmole), and c = change in measured NO_x across the SCR (ppmvd at 15 percent O₂). The operator shall install and maintain a NO_x analyzer to measure the SCR inlet NO_x ppm accurate to within plus or minus 5 percent calibrated at least once every 12 months.

The operator shall use the method described above or another alternative method approved by the Executive Officer.

The ammonia slip calculation procedures described above shall not be used for compliance determination for emission information determination without corroborative data using an approved reference test method for the determination of ammonia.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : C1536, C1538]

A195.2 The 10 PPMV NH₃ emission limit(s) is averaged over consecutive 60 minutes at 3 percent O₂ dry.

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

A195.3 The 51.9 PPMV NO_x emission limit(s) is averaged over 365-day rolling and at 0% O₂.

For the purposes of this condition, this limit is a long term limit which applies at all times including during start-up, shutdown, malfunction and hydrotreater outages as well as operation of the FCCU with or without the CO Boiler operating .

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

A195.4 The 36.2 PPMV SOX emission limit(s) is averaged over 365-day rolling at 0% O₂.

For the purposes of this condition, this limit is a long term limit which applies at all times including during start-up, shutdown, malfunction and hydrotreater outages as well as operation of the FCCU with or without the CO Boiler operating.

[CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

A195.5 The 63.2 PPMV NOX emission limit(s) is averaged over 24-hour rolling at 0% O₂.

For the purposes of this condition, this limit shall apply when the FCCU and CO boiler are operating and does not apply during periods of start-up, shutdown, malfunction and hydrotreater outages.

[CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

A195.6 The 88.6 PPMV NOX emission limit(s) is averaged over 24-hour rolling at 0% O₂.

For the purposes of this condition, this limit shall apply when only the FCCU is operating and does not apply during periods of start-up, shutdown, malfunction and hydrotreater outages.

[CONSENT DECREE, 3-21-2001]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D96]

A195.8 The 69.1 PPMV SOX emission limit(s) is averaged over 7-day rolling at 0% O₂.

For the purposes of this condition, this limit shall apply when only the FCCU is operating and does not apply during periods of start-up, shutdown, malfunction and hydrotreater outages.

[**CONSENT DECREE, 3-21-2001**]

[Devices subject to this condition : D96]

A229.1 The 0.1 lbs/MM Btu emission limit is calculated by an annual average CEMS data.

For the purpose of this condition, the emission limit is for NO_x emission limit.

[**CONSENT DECREE, 3-21-2001**]

[Devices subject to this condition : D89, D90]

A305.1 Whenever this equipment is in operation, the SCR serving this equipment, C764, is not required to be in operation, but may be operated at any control efficiency provided that the emission concentrations being monitored by the certified CEMS serving this equipment is below the valid upper range specified in the approved CEMS plan.

[**RULE 2012, 5-6-2005**]

[Devices subject to this condition : D9]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

A327.1 For the purpose of determining compliance with District Rule 475, combustion contaminant emissions may exceed the concentration limit or the mass emission limit listed, but not both limits at the same time.

[RULE 475, 10-8-1976; RULE 475, 8-7-1978]

[Devices subject to this condition : D810, D812]

B. Material/Fuel Type Limits

B22.1 The operator shall not use this equipment with materials having a(n) true vapor pressure of 0.5 psia or greater under actual operating conditions.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D543, D549, D568, D582, D583, D586, D587, D588, D591, D605, D609, D632, D635, D647, D657, D1555]

B22.2 The operator shall not use this equipment with materials having a(n) true vapor pressure of 1.5 psia or greater under actual operating conditions.

[RULE 462, 5-14-1999]

[Devices subject to this condition : D515]

B22.3 The operator shall only use this equipment with materials having a(n) true vapor pressure of 5.7 psia or less under actual operating conditions.

[RULE 1303(b)(2)-Offset, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D639]

- B22.4 The operator shall not use this equipment with materials having a(n) true vapor pressure of 10 psia or greater under actual operating conditions.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D547, D550, D551]

- B22.8 The operator shall not use this equipment with materials having a(n) true vapor pressure of 11 psia or greater under actual operating conditions.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D557, D561, D564, D654, D982, D1078]

- B22.9 The operator shall not use this equipment with materials having a(n) true vapor pressure of 1.7 psia or greater under actual operating conditions.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D602, D608]

- B22.10 The operator shall not use this equipment with materials having a(n) true vapor pressure of 9.15 psia or greater under actual operating conditions.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D595]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

B22.11 The operator shall not use this equipment with materials having a(n) true vapor pressure of 6.6 psia or greater under actual operating conditions.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D606, D607]

B22.12 The operator shall not use this equipment with materials having a(n) true vapor pressure of 0.1 psia or greater under actual operating conditions.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D581]

B22.13 The operator shall not use this equipment with materials having a(n) true vapor pressure of 4.7 psia or less under actual operating conditions.

This true vapor pressure shall only apply when storing Transmix Gasoline

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D606]

B27.1 The operator shall not use materials containing any toxic air contaminants (TACs) identified in the SCAQMD Rule 1401, as amended 03/04/2005.

[RULE 1401, 3-7-2008]

[Devices subject to this condition : D1573]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

B59.1 The operator shall only use the following material(s) in this device :

Fuel gas. The term "fuel gas" shall be defined as either refinery gas, or vaporized LPG, or natural gas, or any combination thereof.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D251]

B59.2 The operator shall only use the following material(s) in this device :

Perchloroethylene

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D1533]

B59.3 The operator shall only use the following material(s) in this device :

AMMONIA

[RULE 1303, 5-10-1996; RULE 1303, 12-6-2002]

[Devices subject to this condition : D311]

B59.4 The operator shall only use the following material(s) in this device :

Crude Oil, Light Cycle Oil, Gas Oil, Diesel

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303, 5-10-1996]

[Devices subject to this condition : D613, D617, D630]

B59.5 The operator shall only use the following material(s) in this device :

Crude Oil, Diesel Oil

[RULE 1303, 5-10-1996]

[Devices subject to this condition : D618, D621]

B59.8 The operator shall only use the following material(s) in this device :

Light Crude Oil with true vapor pressure of 7.5 psia or less, Heavy Crude Oil, Recycle Oil, Heavy Gas Oil, Light Gas Oil, Diesel.

[RULE 1303, 5-10-1996]

[Devices subject to this condition : D614]

B59.9 The operator shall only use the following material(s) in this device :

Gasoline

[RULE 1303, 5-10-1996]

[Devices subject to this condition : D593]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

B59.10 The operator shall only use the following material(s) in this device :

Non-Commingled Stormwater

Tesoro shall keep for the life of the facility in a readily accessible location , plans, or specifications which demonstrate that no wastewater from any process units or equipment is directly discharged to the storwater sewer system

[RULE 1303, 5-10-1996]

[Devices subject to this condition : D1719]

B59.11 The operator shall only use the following material(s) in this device :

Caustic/Spent Caustic

[RULE 1303, 5-10-1996; RULE 1303, 12-6-2002]

[Devices subject to this condition : D1670, D1671, D1672, D1673]

B59.12 The operator shall only use the following material(s) in this device :

Heavy Gas Oil, Diesel, Jet Fuel, Cycle Oil

[RULE 1303, 5-10-1996; RULE 1303, 12-6-2002]

[Devices subject to this condition : D603]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

B59.13 The operator shall only use the following material(s) in this device :

Gasoline and Naphtha

[RULE 1303, 5-10-1996; RULE 1303, 12-6-2002]

[Devices subject to this condition : D599]

B59.14 The operator shall only use the following material(s) in this device :

Heated Light Crude Oil,, Unheated Light Crude Oil

Heated Heavy Crude Oil up to 140 degrees F, Unheated Heavy Crude Oil

Diesel, Gas Oil

[RULE 1303, 5-10-1996; RULE 1303, 12-6-2002]

[Devices subject to this condition : D624]

B59.15 The operator shall only use the following material(s) in this device :

Sweet Spent Caustic

[RULE 1303, 5-10-1996; RULE 1303, 12-6-2002]

[Devices subject to this condition : D1712]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

B61.1 The operator shall not use fuel gas containing the following specified compounds:

Compound	ppm by volume
H2S greater than	160

The H2S concentration limit of 160 ppm shall be based on a rolling 3-hour averaging period at the standard conditions of 60 F and 14.7 psia, as defined in Rule 102. This H2S concentration limit of 160 ppm is equivalent to 162 ppm at the standard conditions of 68 F and 29.92" Hg, as defined in 40CFR 60 Subpart A.

[40CFR 60 Subpart J, 6-24-2008; CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D9, D32, D33, D89, D90, D91, D92, D112, D120, D146, D157, D158, D194, D196, D214, D215, D216, D217, D218, D247, D248, D249, D250, D251, D384, D385, D386, D387, D388, D722, D723, D724, D725, D770, D777, D1122]

B61.2 The operator shall only use diesel fuel containing the following specified compounds:

Compound	weight percent
Sulfur compounds less than	0.05

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D713, D714, D1100, D1101, D1102, D1103, D1104]

B61.4 The operator shall not use fresh feed containing the following specified compounds:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Compound	weight percent
Total sulfur greater than	0.3

[40CFR 60 Subpart J, 6-24-2008; CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

B61.5 The operator shall not use any fuel containing the following specified compounds:

Compound	weight percent
Total sulfur greater than	0.8

The sulfur concentration limit shall be based on a daily average

[40CFR 60 Subpart GG, 2-24-2006]

[Devices subject to this condition : D810, D812]

B61.6 The operator shall not use diesel fuel containing the following specified compounds:

Compound	ppm by weight
Sulfur greater than	15

[RULE 1470, 5-4-2012; RULE 431.2, 5-4-1990; RULE 431.2, 9-15-2000]

[Devices subject to this condition : D1617, D1618, D1645, D1646, D1692, D1693, D1694]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

B61.9 The operator shall not use fuel gas containing the following specified compounds:

Compound	ppm by volume
H2S greater than	160

The H2S concentration limit of 160 ppm shall be based on a rolling 3-hour averaging period at the standard conditions of 60 F and 14.7 psia, as defined in Rule 102. This H2S concentration limit of 160 ppm is equivalent to 162 ppm at the standard conditions of 68 F and 29.92" Hg, as defined in 40CFR 60 Subpart A.

[40CFR 60 Subpart J, 6-24-2008]

[Devices subject to this condition : D810, D812]

C. Throughput or Operating Parameter Limits

C1.1 The operator shall limit the material processed to no more than 276000 lb(s)/hr.

For the purpose of this condition, material processed shall be defined as steam produced on an average daily basis from equipment ID: D722, D723, D724 & D725 when two turbines, D810 & D812, and the CO boiler, D112, are in operation.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D722, D723, D724, D725]

C1.2 The operator shall limit the throughput to no more than 1000 gallon(s) per year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D1120, D1121]

C1.3 The operator shall limit the loading rate to no more than 20000 gallon(s) per day.

For the purpose of this condition, loading rate shall be defined as the throughput recorded by the shipping records.

[RULE 462, 5-14-1999]

[Devices subject to this condition : D515]

C1.4 The operator shall limit the throughput to no more than 425000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D602, D608]

- C1.5 The operator shall limit the throughput to no more than 600,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way(increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings..

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D595]

C1.7 The operator shall limit the throughput to no more than 168885 barrel(s) in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D550]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

- C1.8 The operator shall limit the throughput to no more than 152083 barrel(s) in any one month.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way(increasing)volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

In the event of a failure of a component of the ATLGS, the throughput shall be determined by utilizing the one-hour average from the previous 30 days during the period that data was not available.

During routine maintenance or manual gauging, the throughput shall be determined by utilizing the one-hour average from the previous 30 days during the period that data was not available.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D561, D564]

- C1.12 The operator shall limit the unloading rate to no more than 30000 gallon(s) per month.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D728, D1321]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

C1.15 The operator shall limit the heat input to no more than 90000 MM Btu in any one year.

The purpose(s) of this condition is to ensure that this equipment qualifies as a RECLAIM large source.

[RULE 2012, 5-6-2005]

[Devices subject to this condition : D91, D194, D196]

C1.18 The operator shall limit the throughput to no more than 375000 barrel(s) in any one calendar month.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D654]

C1.19 The operator shall limit the number of turnovers to no more than 130 in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D639]

C1.21 The operator shall limit the number of turnovers to no more than 12.5 in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D523]

C1.22 The operator shall limit the number of turnovers to no more than 26 in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D524]

C1.23 The operator shall limit the number of turnovers to no more than 183 in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D562, D563]

C1.24 The operator shall limit the throughput to no more than 5.475e+06 barrel(s) in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D688]

C1.25 The operator shall limit the throughput to no more than 3e+06 barrel(s) in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D657]

C1.26 The operator shall limit the throughput to no more than 72083 barrel(s) in any one month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way(increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

In the event of a failure of a component of the ATLGS, the throughput shall be determined by utilizing the one-hour average from the previous 30 days during the period that data was not available.

During routine maintenance or manual gauging, the throughput shall be determined by utilizing the one-hour average from the previous 30 days during the period that data was not available.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D557]

C1.27 The operator shall limit the throughput to no more than 274651 barrel(s) in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D546]

C1.28 The operator shall limit the throughput to no more than 3,500,000 barrel(s) in any one year.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D1500]

C1.29 The operator shall limit the throughput to no more than 200000 barrel(s) in any one calendar month.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system (ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way(increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8 %, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D589, D600]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

C1.31 The operator shall limit the throughput to no more than 450000 barrel(s) in any one calendar month.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8% , whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D652]

C1.32 The operator shall limit the throughput to no more than 350000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D655, D1078]

- C1.33 The operator shall limit the throughput to no more than 650000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D648, D658]

C1.34 The operator shall limit the throughput to no more than 12000 gallon(s) per year.

The operator shall use the purchase invoices to determine the throughput of stored liquid.

[RULE 1401, 3-7-2008]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D1533]

- C1.35 The operator shall limit the throughput to no more than 300,000 barrel(s) in any one calendar month.

The operator shall utilize an automatic tank level gauging device to determine throughput. The automatic level gauge (tank liquid level) will be manually recorded every 4 hours during the time that product movement occurs and at the start and the end of each product movement. The liquid volume shall be calculated using the tank liquid level records and the tank strapping tables. The throughput in barrels shall be calculated the sum of total one-way (increasing) volume movements on a monthly basis.

The operator shall keep monthly records on the throughput and the vapor pressure for each type of stored product.

[**RULE 1303(b)(2)-Offset, 5-10-1996**; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D653]

- C1.36 The operator shall limit the throughput to no more than 350,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D659]

- C1.37 The operator shall limit the throughput to no more than 900,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

This limit shall not apply when this tank is used in storing Transmix Gasoline. The total throughput shall be limited to 360, 000 barrels in any one calendar month in which Transmix Gasoline is stored for any length of time.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way(increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings..

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D606, D607]

C1.40 The operator shall limit the throughput to no more than 600,000 barrel(s) in any one month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way(increasing)volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

In the event of a failure of a component of the ATLGS, the throughput shall be determined by utilizing the one-hour average from the previous 30 days during the period that data was not available.

During routine maintenance or manual gauging, the throughput shall be determined by utilizing the one-hour average from the previous 30 days during the period that data was not available.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D614, D982]

- C1.41 The operator shall limit the throughput to no more than 400,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D649]

C1.42 The operator shall limit the throughput to no more than 300,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D630]

C1.43 The operator shall limit the maintenance and testing to no more than 50 hour(s) in any one year.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(a)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002; RULE 1470, 6-1-2007]

[Devices subject to this condition : D1617, D1618, D1645, D1646]

- C1.44 The operator shall limit the maintenance and testing to no more than 5 hour(s) in any one month.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D1617, D1618, D1645, D1646]

- C1.45 The operator shall limit the operating time to no more than 199 hour(s) in any one year.

[RULE 1110.2, 2-1-2008; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002; RULE 1470, 6-1-2007]

[Devices subject to this condition : D1617, D1618, D1645, D1646]

- C1.46 The operator shall limit the loading rate to no more than 912500 barrel(s) of Pentane in any one year.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D1040]

- C1.47 The operator shall limit the throughput to no more than 350,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D613, D618, D621]

C1.49 The operator shall limit the throughput to no more than 152,167 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

This condition shall only apply when this tank is storing product having a vapor pressure of 0.1 psia or lower.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D547, D551]

- C1.51 The operator shall limit the throughput to no more than 14,074 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

This condition shall only apply when this tank is storing product of vapor pressure of 0.1 psia or greater. If this tank is storing product of vapor pressure of 0.1 psia or lower, refer to condition C1.49 for throughput limit.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D547, D551]

C1.53 The operator shall limit the throughput to no more than 608,333 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days ..

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D593]

C1.54 The operator shall limit the throughput to no more than 500,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D603, D617]

C1.55 The operator shall limit the operating time to no more than 199 hour(s) in any one year.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

This engine shall not be operated more than 199 hour(s) in any one year, which include no more than 34 hours in any one year and no more than 2.8 hours in any one month, both, for maintenance and testing.

The 34 hours limit for maintenance and testing is to ensure compliance with requirements of National Fire Protection Association (NEPA) publication 25.

[RULE 1110.2, 2-1-2008; RULE 1304(c)-Offset Exemption, 6-14-1996; RULE 1470, 6-1-2007]

[Devices subject to this condition : D713]

C1.56 The operator shall limit the operating time to no more than 199 hour(s) in any one year.

This engine shall not be operated more than 199 hours in any one year, which includes no more than 20 hours in any one year and no more than 1.7 hours in any one month, both, for maintenance and testing.

[RULE 1304(a)-Modeling and Offset Exemption, 6-14-1996; RULE 1470, 6-1-2007; RULE 2012, 5-6-2005]

[Devices subject to this condition : D714, D1100, D1101, D1102, D1103, D1104]

C1.57 The operator shall limit the operating time to no more than 200 hour(s) in any one year.

This engine shall not be operated more than 200 hours in any one year, which includes no more than 50 hours in any one year and no more than 4.2 hours in any one month for maintenance and testing.

[RULE 1304(a)-Modeling and Offset Exemption, 6-14-1996; RULE 1470, 5-4-2012; RULE 2012, 5-6-2005]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D1692, D1693, D1694]

C1.58 The operator shall limit the throughput to no more than 600,000 barrel(s) in any one calendar month.

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D599]

C1.59 The operator shall limit the throughput to no more than 500,000 barrel(s) in any one calendar month.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall measure and record the liquid volume of the tank using an automatic tank level gauging system(ATLGS). The ATLGS shall measure the tank liquid level and calculate the liquid volume using the tank strapping tables. The volume measurements shall be recorded electronically once every 15 minutes.

The operator shall calculate the throughput in barrels using the total one-way (increasing) volume movement on a monthly basis. The calculation will be based on the sum of the increasing volume readings.

The ATLGS installed shall be verified once per quarter by comparing against a manual tank level measurement. If the ATLGS differs from the manual tank level measurement by more than 1.0 inch or 0.8%, whichever is greater, the ATLGS shall be repaired and back to service within 10 days.

In the event of a failure or routine maintenance of the ATLGS, the ATLGS shall be repaired and put back into service within 10 days of the time that the ATLGS failed or was removed from service for maintenance. While the ATLGS is being repaired or maintained, the throughput shall be determined by the hourly tank level data averaged from the previous 30 days prior to time that the ATLGS went out of service.

The operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D624]

C6.2 The operator shall use this equipment in such a manner that the hydrocarbon concentration being monitored, as indicated below, does not exceed 30 percent of the Lower Explosive Limit.

The operator shall use an explosimeter or equivalent device to monitor the hydrocarbon concentration in the vapor space above the floating roof device twice a year to a 4 to 8 month interval.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Devices subject to this condition : D659, D660]

- C6.3 The operator shall use this equipment in such a manner that the differential pressure being monitored, as indicated below, does not exceed 4 inches HG.

To comply with this condition, the operator shall install and maintain a(n) differential pressure gauge to accurately indicate the differential pressure across the filters.

The operator shall record and keep records of the differential pressure readings once per week.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C1574]

- C6.4 The operator shall use this equipment in such a manner that the hydrocarbon concentration being monitored, as indicated below, does not exceed 30 percent of the Lower Explosive Limit.

The operator shall use an explosimeter or equivalent device to monitor the hydrocarbon concentration in the vapor space above the floating roof device on a semi-annual basis.

[RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Devices subject to this condition : D593, D599, D603, D613, D614, D617, D618, D621, D624, D630]

- C8.2 The operator shall use this equipment in such a manner that the temperature being monitored, as indicated below, is not less than 1200 Deg F.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

This condition shall only apply when waste gases are being incinerated.

To comply with this condition, the operator shall install and maintain a(n) temperature gauge to accurately indicate the temperature in the firebox or in the ductwork immediately downstream from the firebox.

The measuring device or gauge shall be accurate to within plus or minus 10 percent. It shall be calibrated once every 12 months.

The operator shall also install and maintain a device to continuously record the parameter being measured.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : D722, D723, D724, D725]

- C8.3 The operator shall use this equipment in such a manner that the flow rate being monitored, as indicated below, is not less than 20 gpm.

To comply with this condition, the operator shall install and maintain a(n) flow meter to accurately indicate the flow rate of the caustic scrubbing solution.

The operator shall determine and record the parameter being monitored daily.

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 407, 4-2-1982]

[Devices subject to this condition : C761, C762]

- C12.2 The operator shall use this equipment in such a manner that the ESP daily average voltage and secondary current (or total power input) being monitored as indicated below are greater than or equal to the average value in the most recent source test which demonstrated compliance with the emission limits.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall install and maintain a continuous monitoring and recording system to accurately measure and record the:

1. Total flue gas inlet temperature to ESPs
2. Total flue gas flow rate
3. Current across each ESP
4. Voltage across each ESP

at each ESP. In addition, the operator shall keep records, in a manner approved by the District, for each of these parameters.

If the daily average ESP total power input falls below the level measured in the most recent source test which demonstrated compliance with the emission limit, a source test shall be performed within 90 days at the new minimum daily average ESP total power level. The source test shall be performed according to the requirements specified in Permit Condition D29.8

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1577]

C177.1 The operator shall set and maintain the fuel injection timing of the engine at 4 degrees retarded relative to standard timing.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D713]

D. Monitoring/Testing Requirements

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

- D12.1 The operator shall install and maintain a(n) temperature gauge to accurately indicate the temperature across the SCR bed when the SCR is in service.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C764, C768, C771, C773, C775, C778, C784, C786, C788]

- D12.2 The operator shall install and maintain a(n) non-resettable elapsed time meter to accurately indicate the elapsed operating time of the engine.

[RULE 1304(c)-Offset Exemption, 6-14-1996; RULE 2012, 5-6-2005]

[Devices subject to this condition : D713, D714, D1100, D1101, D1102, D1103, D1104, C1576]

- D12.3 The operator shall install and maintain a(n) continuous monitoring system to accurately indicate the water-to-fuel ratio of the cogeneration system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 475, 10-8-1976; RULE 475, 8-7-1978; 40CFR 60 Subpart GG, 2-24-2006]

[Devices subject to this condition : D810, D812]

- D12.4 The operator shall install and maintain a(n) thermocouple or any other equivalent device to accurately indicate the presence of a flame at the pilot light.

The operator shall also install and maintain a device to continuously record the parameter being monitored.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1118, 11-4-2005; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; 40CFR 60 Subpart A, 6-13-2007]

[Devices subject to this condition : C747, C748]

D12.6 The operator shall install and maintain a(n) flow meter to accurately indicate the flow rate of the the total hourly throughput recorded of injected ammonia.

The measuring device or gauge shall be accurate to within plus or minus 5 percent. It shall be calibrated once every 12 months.

The operator shall also install and maintain a device to continuously record the parameter being measured.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C1536, C1538]

D12.7 The operator shall install and maintain a(n) temperature gauge to accurately indicate the temperature of the exhaust at the inlet to the SCR reactor.

The measuring device or gauge shall be accurate to within plus or minus 5 percent. It shall be calibrated once every 12 months.

The operator shall also install and maintain a device to continuously record the parameter being measured.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C1536, C1538]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

D12.8 The operator shall install and maintain a(n) pressure gauge to accurately indicate the differential pressure across the SCR catalyst bed in inches of water column.

The measuring device or gauge shall be accurate to within plus or minus 5 percent. It shall be calibrated once every 12 months.

The operator shall also install and maintain a device to continuously record the parameter being measured.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C1536, C1538]

D12.13 The operator shall install and maintain a(n) non-resettable elapsed time meter to accurately indicate the elapsed operating time of the engine.

[RULE 1110.2, 2-1-2008; RULE 1470, 5-4-2012; RULE 2012, 5-6-2005]

[Devices subject to this condition : D1617, D1618, D1645, D1646, D1692, D1693, D1694]

D28.3 The operator shall conduct source test(s) in accordance with the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The test shall be conducted to confirm the emission limits of this equipment as specified in Condition A63.2 for device D32 and Condition A63.10 for device D9.

The test shall be conducted to determine and report the mass emission rate in pound per hour for ROG, PM10 and CO.

Source test shall be conducted when this equipment is operating at 80 percent or greater of the permitted maximum rated capacity.

The test shall be conducted to confirm the CO emission concentration limit of 35 ppm, corrected to 3 percent oxygen, dry basis.

The test shall be conducted within 60 days after achieving maximum production rate, but no later than 180 days after initial start-up.

The District shall be notified of the date and time of the test at least 10 days prior to the test.

The test shall be conducted at least once every three years for ROG, PM10 and CO emissions.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : D9, D32]

D28.4 The operator shall conduct source test(s) in accordance with the following specifications:

The test shall be conducted at least annually.

The test shall be conducted when the SCR is in use to determine the NH3 emissions at the outlet.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C764, C768, C771, C773, C775, C778, C784, C786, C788]

D28.8 The operator shall conduct source test(s) in accordance with the following specifications:

The test shall be conducted to determine emission rate of NO_x, SO_x, ROG, CO, PM and PM₁₀. The operator shall submit a test protocol to the District at least 60 days prior to the initial testing. The initial and annual test shall be conducted according to the approved test protocol or any subsequently approved revisions. The report of the test and operating condition of the equipment shall be submitted to the District within 60 days after the test.

The District shall be notified of the date and time of the test at least 10 days prior to the test.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D96]

D29.1 The operator shall conduct source test(s) for the pollutant(s) identified below.

Pollutant(s) to be tested	Required Test Method(s)	Averaging Time	Test Location
PM emissions	Approved District method	1 hour	Outlet

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The test(s) shall be conducted at least annually.

The test shall be conducted when the equipment is operating under normal conditions.

Source test results shall be submitted to the District no later than 60 days after the source test was conducted

Source test results shall include the following parameters: FCCU feed rate; catalyst recirculation rate; coke burn rate; oxygen content of exhaust gases; exhaust flow rate; exhaust gas moisture content; the flue gas temperature at the outlet of the ESP; and the average current, voltage, and spark rate at each of the ESP fields

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 404, 2-7-1986; RULE 405, 2-7-1986; CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

D29.2 The operator shall conduct source test(s) for the pollutant(s) identified below.

Pollutant(s) to be tested	Required Test Method(s)	Averaging Time	Test Location
PM emissions	Approved District method	1 hour	Outlet

The test(s) shall be conducted at least once every three years.

The test shall be conducted when the equipment is operating under normal conditions.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : D810, D812]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

D29.3 The operator shall conduct source test(s) for the pollutant(s) identified below.

Pollutant(s) to be tested	Required Test Method(s)	Averaging Time	Test Location
PM emissions	Approved District method	1 hour	Outlet

The test(s) shall be conducted at least once every three years.

The test shall be conducted when the equipment being vented by the SCR are operating under normal conditions.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C786]

D29.5 The operator shall conduct source test(s) for the pollutant(s) identified below.

Pollutant(s) to be tested	Required Test Method(s)	Averaging Time	Test Location
NH3 emissions	District method 207.1 or EPA method 17	1 hour	Outlet of the SCR serving this equipment

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The test(s) shall be conducted at least once each calendar quarter during the first 12 months of operation and at least annually thereafter. The NOx concentration, as determined by the CEMS, shall be simultaneously recorded during the ammonia slip test. If the CEMS is inoperable, a test shall be conducted to determine the NOx emissions using District Method 100.1 measured over a 60 minute averaging time period.

The test shall be conducted to demonstrate compliance with Rule 1303 concentration limit.

The test shall be conducted when the equipment is operating at 80 percent load or greater.

The test shall be conducted and the results submitted to the AQMD permitting engineer within 45 days after the test date.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : C1536, C1538]

D29.7 The operator shall conduct source test(s) for the pollutant(s) identified below.

Pollutant(s) to be tested	Required Test Method(s)	Averaging Time	Test Location
NOX emissions	District method 100.1	1 hour	Outlet of the SCR
PM emissions	Approved District method	District-approved averaging time	Outlet of the SCR
NH3 emissions	District method 207.1 and 5.3 or EPA method	1 hour	Outlet of the SCR

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The test shall be conducted after AQMD approval of the source test protocol, but no later than 180 days after the issuance of the permit. The AQMD shall be notified of the date and time of the test at least 10 days prior to the test.

The test shall be conducted to determine the oxygen levels in the exhaust. In addition, the test shall record the fuel flow rate(CFH), the flue gas flowrate.

The test shall be conducted in accordance with AQMD approved source test protocol. The protocol shall be submitted to the AQMD no later than 45 days before the proposed test date and shall be approved by the AQMD before test commences. The test protocol shall include the proposed operating conditions of the SCR during the test, the identity of the testing lab, a statement from the testing lab certifying that it meets the criteria of Rule 304, and a description of all sampling and analytical procedures.

The test shall be conducted when the heater(s) , which this SCR is serving, is (are) operating at loads of 80 percent or greater of the permitted maximum rated capacity.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : C771, C773, C775, C778]

D29.8 The operator shall conduct source test(s) for the pollutant(s) identified below.

Pollutant(s) to be tested	Required Test Method(s)	Averaging Time	Test Location
PM10 emissions	District Method 5.2 Modified with EPA Method 201A Cyclone (filterables compliance, condensables information)	District-approved averaging time	Combined Stack Outlet of the ESP's

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

PM10 emissions	District Method 5.2 (filterables compliance, condensables information)	District-approved averaging time	Combined Stack Outlet of the ESP's
PM10 emissions	District Method 5.2 with Previously Determined PM10 to PM Ratio Applied (filterables compliance, condensables information)	District-approved averaging time	Combined Stack Outlet of the ESP's
PM10 emissions	EPA Method 5 (filterables compliance) and District Method 5.2 (condensables information)	District-approved averaging time	Combined Stack Outlet of the ESP's
NH3 emissions	District method 207.1	1 hour	Combined Stack Outlet of the ESP's
NOX emissions	District method 100.1	1 hour	Combined Stack Outlet of the ESP's
CO emissions	District Method 100.1 or 10.1	1 hour	Combined Stack Outlet of the ESP's
VOC	District Method 25.1 or 25.3	1 hour	Combined Stack Outlet of the ESP's

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall choose any of the PM10 test methods as indicated above to comply with Rule 1105.1 requirements and the test results of any of the selected test methods shall be used to determine compliance with Rules 404 and 405.

For the purpose of this condition filterable PM10 is the PM10 collected on the cyclone exit, probe, and filter(s) of the applicable test methods referenced above. Condensable PM10 is the PM10 collected in the impingers of the applicable test methods referenced above

The test shall be conducted after AQMD approval of the source test protocol, but no later than 180 days after initial start-up of the new ESP's. The AQMD engineer shall be notified in writing of the date and time of the test at least 10 days prior to the test.

The test shall be conducted in accordance with AQMD approves source test protocol. The protocol shall be submitted to the AQMD no later than 45 days before the proposed test date and shall be approved by the AQMD before test commences. The test protocol shall include the proposed operating conditions of the FCCU during the test, the identity of the test lab, a statement from the testing lab certifying that it meets the criteria of R-304, and a description of all sampling and analytical procedures.

The test shall be conducted at two different throughput ranges. The 1st throughput range when the FCCU is operating at 30.9 thousand barrels a day or less. The 2nd throughput range when the FCCU is operating at 30.9 thousand barrels per day or more.

The test(s) shall be conducted at least every year with the two different ranges after initial source test(s).

Source test results shall include the following parameters: FCCU feed rate in BPD; catalyst recirculation rate in BPD; catalyst inventory in the equipment; fresh catalyst feed; coke burn rate; oxygen content of exhaust gases; exhaust flow rate; exhaust gas moisture content; the flue gas temperature at the outlet of the ESP; ammonia injection rate prior to the ESPs(if applicable) and the average current in amps , voltage in volts and spark rate at each ESP field in use

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

A source test report shall be submitted to the District no later than 60 days after the source test was completed

[RULE 1105.1, 11-7-2003; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 404, 2-7-1986; RULE 405, 2-7-1986]

[Devices subject to this condition : C1575, C1576, C1577]

D82.1 The operator shall install and maintain a CEMS to measure the following parameters:

CO concentration in ppmv

Concentrations shall be corrected to 15 percent oxygen on a dry basis.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 407, 4-2-1982]

[Devices subject to this condition : C811, C813]

D82.2 The operator shall install and maintain a CEMS to measure the following parameters:

CO concentration in ppmv

Oxygen concentration in percent volume

[40CFR 60 Subpart J, 6-24-2008; CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

D90.2 The operator shall periodically monitor the pH of the caustic solution according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall monitor once every week.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D798]

D90.3 The operator shall periodically monitor the pH of the caustic solution whenever the scrubber is in operation according to the following specifications:

The operator shall monitor once every day.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : C232]

D90.4 The operator shall periodically monitor the VOC concentration at the outlet of the last carbon according to the following specifications:

The operator shall use a District approved Organic Vapor Analyzer (OVA) to monitor the parameter.

The operator shall monitor once every day when the carbon adsorber is in operation.

**[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring,
12-12-1997; 40CFR 61 Subpart FF, 12-4-2003; 40CFR 63 Subpart CC, 6-23-2003]**

[Devices subject to this condition : C472, C473, C1096]

D90.5 The operator shall continuously monitor the VOC concentration at the outlet of the last carbon adsorber according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall use a continuous emission monitoring system (CEMS) to monitor the parameter.

The operator shall also install and maintain a device to continuously record the parameter being monitored.

The operator shall monitor the VOC concentration utilizing a District approved Organic Analyzer once per day during the CEMS breakdown or maintenance periods.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; 40CFR 63 Subpart CC, 6-23-2003]

[Devices subject to this condition : C699, C702]

D90.6 The operator shall periodically sample the caustic scrubbing solution at the inlet of the scrubber for caustic concentration analysis according to the following specifications:

The operator shall sample , analyze, and record once per day the strength of the caustic (NaOH) solution which shall not be less than 3 percent.

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 407, 4-2-1982]

[Devices subject to this condition : C761, C762]

D90.7 The operator shall continuously monitor the H₂S concentration in the fuel gases before being burned in this device according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall use Gas Chromatograph meeting the requirements of 40CFR60 Subpart J to monitor the parameter.

The operator shall also install and maintain a device to continuously record the parameter being monitored.

The operator may monitor the H₂S concentration at a single location for fuel combustion devices, if monitoring at this location accurately represents the concentration of H₂S in the fuel gas being burned in this device.

[40CFR 60 Subpart J, 6-24-2008]

[Devices subject to this condition : D9, D32, D33, D89, D90, D91, D92, D112, D120, D146, D157, D158, D194, D196, D214, D215, D216, D217, D218, D247, D248, D249, D250, D251, D384, D385, D386, D387, D388, D722, D723, D724, D725, D770, D777, D810, D812, D1122]

D90.8 The operator shall continuously monitor the opacity at the stack according to the following specifications:

The operator shall use an opacity meter to monitor the parameter.

The operator shall also install and maintain a device to continuously record the parameter being monitored.

[40CFR 60 Subpart J, 6-24-2008; CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D96]

D90.10 The operator shall continuously monitor the sulfur concentration in the fuel gases being burned in this device according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall monitor the sulfur concentration in the fuel by utilizing the SO_x emission data from the certified RECLAIM SO_x CEMS to calculate the sulfur concentration in the fuel as specified in the alternative monitoring plan which received EPA approval on June 23, 1998.

[40CFR 60 Subpart GG, 2-24-2006]

[Devices subject to this condition : D810, D812]

D90.11 The operator shall continuously monitor the temperature in degree F of the flue gas at the inlet to the ESP according to the following specifications:

The operator shall monitor once every 15 minutes.

The operator shall automatically record electronically the above parameter at least one measurement every hour. These records shall be maintained for at least five years and made available to AQMD personnel upon request

The continuous monitor shall be installed and operated whenever the ESP is operating

Monitoring and recording of this parameter shall not be required during periods of routine maintenance or malfunction of the monitoring and recording devices

The temperature monitor shall have a minimum range from 500 to 710 degrees F and be accurate to within plus or minus 5 percent and shall be calibrated at least once every 12 months

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

D90.12 The operator shall continuously monitor the flow rate in scfm of the flue gas at the inlet to the ESP according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall monitor once every 15 minutes.

The operator shall automatically record electronically the above parameter at least one measurement every hour. These records shall be maintained for at least five years and made available to AQMD personnel upon request

The continuous monitor shall be installed and operated whenever the ESP is operating

Monitoring and recording of this parameter shall not be required during periods of routine maintenance or malfunction of the monitoring and recording devices

The flow rate monitor shall have a minimum range of 55,000 to 75,000 scfm and be accurate to within plus or minus 5 percent and shall be calibrated at least once every 12 months

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

D90.13 The operator shall continuously monitor the voltage in volts across the ESP's T/R sets according to the following specifications:

The operator shall monitor once every 15 minutes.

The operator shall automatically record electronically the above parameter at least one measurement every hour. These records shall be maintained for at least five years and made available to AQMD personnel upon request

The continuous monitor shall be installed and operated whenever the ESP is operating

Monitoring and recording of this parameter shall not be required during periods of routine maintenance or malfunction of the monitoring and recording devices

The voltage monitor shall have a minimum range of 15 to 54 KV and be accurate to within plus or minus 5 percent and shall be calibrated at least once every 12 months

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

D90.14 The operator shall continuously monitor the current in amperes across the ESP's T/R sets according to the following specifications:

The operator shall monitor once every 15 minutes.

The operator shall automatically record electronically the above parameter at least one measurement every hour. These records shall be maintained for at least five years and made available to AQMD personnel upon request

The continuous monitor shall be installed and operated whenever the ESP is operating

Monitoring and recording of this parameter shall not be required during periods of routine maintenance or malfunction of the monitoring and recording devices

The current monitor shall have a minimum range of 400 to 1867 Amps and be accurate to within plus or minus 5 percent and shall be calibrated at least once every 12 months

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

D90.15 The operator shall continuously monitor the the NH₃ injection rate in scfh at the ESP inlet according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall monitor once every 15 minutes.

The operator shall automatically record electronically the above parameter at least one measurement every hour. These records shall be maintained for at least five years and made available to AQMD personnel upon request

The continuous monitor shall be installed and operated whenever the ESP is operating

Monitoring and recording of this parameter shall not be required during periods of routine maintenance or malfunction of the monitoring and recording devices

The NH₃ injection rate monitor shall have a minimum range of 0 to 300 scfh and be accurate to within plus or minus 5 percent and shall be calibrated at least once every 12 months

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

D90.16 The operator shall periodically monitor the H₂S concentration in the fuel gases before being burned in this device according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The Alternative Monitoring Plan (AMP) approved by the United States Environmental Protection Agency (USEPA) on December 4, 2002 for the periodic monitoring and reporting of H₂S concentration for the PSA Purge Gas stream to the reformer heater H-42/43.

The operator shall conduct annual source testing of the PSA purge gas and daily detector tube sampling at the outlet of the first Zinc Oxide bed to confirm that the concentration of H₂S does not exceed 0-1 ppmv.

In addition, the operator shall also comply with all other requirements of the AMP issued by the USEPA on December 4, 2002 for reformer heater H-42/43.

The operator shall maintain records in a manner approved by the District to demonstrate compliance with the requirements specified under this condition.

[40CFR 60 Subpart A, 6-13-2007; 40CFR 60 Subpart J, 6-24-2008]

[Devices subject to this condition : D777, D1122]

D90.17 The operator shall periodically monitor the H₂S concentration in the fuel gases before being burned in this device according to the following specifications:

The Alternative Monitoring Plan (AMP) approved by the United States Environmental Protection Agency (USEPA) on June 23, 2004 for the periodic monitoring and reporting of H₂S concentration for the Merichem Off-Gas Fuel stream to the boiler.

The operator shall conduct daily drager tube sampling of the Merichem Off-Gas Fuel stream to confirm that the concentration of H₂S does not exceed 0-1 ppmv.

The operator shall maintain records in a manner approved by the District to demonstrate compliance with the requirements specified under this condition.

[40CFR 60 Subpart A, 6-13-2007; 40CFR 60 Subpart J, 6-24-2008]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D722, D723, D724, D725]

D90.18 The operator shall periodically monitor the vapor pressure of the material stored in this storage tank according to the following specifications:

The operator shall determine the true vapor pressure by one of the following methods: 1) sample and test the materials stored, 2) derive the vapor pressure using engineering calculations, or 3) maintain on file a copy of the Material Safety Data Sheet (MSDS) of the material stored.

Records of material stored, and their MSDS if applicable, shall be retained for a period of five years and made available to the Executive Officer upon request.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : D543, D547, D549, D550, D551, D557, D561, D564, D568, D582, D583, D586, D587, D588, D595, D602, D605, D606, D607, D608, D609, D632, D635, D639, D647, D654, D657, D982, D1078, D1555]

D90.19 The operator shall monitor the throughput of this storage tank according to the following specifications:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall install and maintain an automatic tank level gauge (ATLG) and recorder to continuously measure and record the liquid surface level movement. The throughput, in barrels, shall be calculated using the following equation: $0.14 \times D \times D \times L$, where D is the diameter of the tank in feet based on the tank strapping chart and L is the total vertical one-way liquid surface level travel in feet per month. For the purpose of this condition, continuous recording is defined as once per hour.

Alternatively, for tanks which do not have an ATLG device, the throughput shall be derived by using engineering calculations using parameters obtained from process records, shipping invoices, manual tank level gauging, etc.

Records of throughput shall be retained for a period of five years and made available to the Executive Officer upon request.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : D546, D550, D648, D649, D657, D688, D1120, D1121, D1500]

D135.1 The operator shall inspect, adjust, and certify the ignition or fuel injection timing of this engine a minimum of once every 3 years of operation. Inspections, adjustments, and certifications shall be performed by a qualified mechanic and performed in accordance with the engine manufacturer's specifications and procedures.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D713, D714]

D322.2 The operator shall perform annual inspection of the equipment and filter media for leaks, broken or torn filter media, and improperly installed filter media.

To comply with this condition, the operator shall maintain records in a manner approved by the District, to demonstrate compliance with this condition.

**FACILITY PERMIT TO OPERATE
TESORO REFINING AND MARKETING CO, LLC**

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

**[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring,
12-12-1997]**

[Devices subject to this condition : C1574]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

D323.1 The operator shall conduct an inspection for visible emissions from all stacks and other emission points of this equipment whenever there is a public complaint of visible emissions, whenever visible emissions are observed, and on a semi-annual basis, at least, unless the equipment did not operate during the entire semi-annual period. The routine semi-annual inspection shall be conducted while the equipment is in operation and during daylight hours.

If any visible emissions (not including condensed water vapor) are detected that last more than three minutes in any one hour, the operator shall verify and certify within 24 hours that the equipment causing the emission and any associated air pollution control equipment are operating normally according to their design and standard procedures and under the same conditions under which compliance was achieved in the past, and either:

- 1). Take corrective action(s) that eliminates the visible emissions within 24 hours and report the visible emissions as a potential deviation in accordance with the reporting requirements in Section K of this permit; or
- 2). Have a CARB-certified smoke reader determine compliance with the opacity standard, using EPA Method 9 or the procedures in the CARB manual "Visible Emission Evaluation", within three business days and report any deviations to AQMD.

The operator shall keep the records in accordance with the recordkeeping requirements in Section K of this permit and the following records:

- 1). Stack or emission point identification;
- 2). Description of any corrective actions taken to abate visible emissions;
- 3). Date and time visible emission was abated; and
- 4). All visible emission observation records by operator or a certified smoke reader.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 401, 3-2-1984; RULE 401, 11-9-2001]

[Devices subject to this condition : D34, D41, D45, D47, D49, D1093, D1094, D1155, D1156, D1157, D1158, D1159, D1160, D1161, D1162, D1164, D1165, D1170, D1173, D1174, D1175, D1176, D1283, D1284, D1287, D1288, D1438, D1532, C1574, D1698, D1699]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

D323.2 The operator shall conduct an inspection for visible emissions from all stacks and other emission points of this equipment whenever there is a public complaint of visible emissions, whenever visible emissions are observed, and on a bi-weekly basis, at least, unless the equipment did not operate during the entire bi-weekly period. The routine bi-weekly inspection shall be conducted while the equipment is in operation and during daylight hours.

If any visible emissions (not including condensed water vapor) are detected that last more than three minutes in any one hour, the operator shall verify and certify within 24 hours that the equipment causing the emission and any associated air pollution control equipment are operating normally according to their design and standard procedures and under the same conditions under which compliance was achieved in the past, and either:

- 1). Take corrective action(s) that eliminates the visible emissions within 24 hours and report the visible emissions as a potential deviation in accordance with the reporting requirements in Section K of this permit; or
- 2). Have a CARB-certified smoke reader determine compliance with the opacity standard, using EPA Method 9 or the procedures in the CARB manual "Visible Emission Evaluation", within three business days and report any deviations to AQMD.

The operator shall keep the records in accordance with the recordkeeping requirements in Section K of this permit and the following records:

- 1). Stack or emission point identification;
- 2). Description of any corrective actions taken to abate visible emissions;
- 3). Date and time visible emission was abated; and
- 4). All visible emission observation records by operator or a certified smoke reader.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 401, 3-2-1984; RULE 401, 11-9-2001]

[Devices subject to this condition : C747, C748]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

D323.3 The operator shall conduct an inspection for visible emissions from all stacks and other emission points of this equipment whenever there is a public complaint of visible emissions, whenever visible emissions are observed, and on a monthly basis, at least, unless the equipment did not operate during the entire monthly period. The routine monthly inspection shall be conducted while the equipment is in operation and during daylight hours.

If any visible emissions (not including condensed water vapor) are detected that last more than three minutes in any one hour, the operator shall verify and certify within 24 hours that the equipment causing the emission and any associated air pollution control equipment are operating normally according to their design and standard procedures and under the same conditions under which compliance was achieved in the past, and either:

- 1). Take corrective action(s) that eliminates the visible emissions within 24 hours and report the visible emissions as a potential deviation in accordance with the reporting requirements in Section K of this permit; or
- 2). Have a CARB-certified smoke reader determine compliance with the opacity standard, using EPA Method 9 or the procedures in the CARB manual "Visible Emission Evaluation", within three business days and report any deviations to AQMD.

The operator shall keep the records in accordance with the recordkeeping requirements in Section K of this permit and the following records:

- 1). Stack or emission point identification;
- 2). Description of any corrective actions taken to abate visible emissions;
- 3). Date and time visible emission was abated; and
- 4). All visible emission observation records by operator or a certified smoke reader.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 401, 3-2-1984; RULE 401, 11-9-2001]

[Devices subject to this condition : C1575, C1576, C1577]

D328.1 The operator shall determine compliance with the CO emission limit(s) either: (a) conducting a source test at least once every five years using AQMD Method 100.1 or 10.1; or (b) conducting a test at least annually using a portable analyzer and AQMD-approved test method. The test shall be conducted when the equipment is operating under normal conditions to demonstrate compliance with CO emission limit(s). The operator shall comply with all general testing, reporting, and recordkeeping requirements in Sections E and K of this permit.

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 407, 4-2-1982]

[Devices subject to this condition : D33, D89, D90, D91, D112, D120, D146, D157, D158, D194, D196, D214, D218, D247, D248, D251, D384, D386, D387, D388, D722, D723, D724, D725, D770, D777, D810, D812, D1122]

D328.2 The operator shall determine compliance with the CO emission limit(s) either: (a) conducting a source test at least once every five years using AQMD Method 100.1 or 10.1; or (b) conducting a test at least annually using a portable analyzer and AQMD-approved test method. The test shall be conducted when the equipment is operating under normal conditions to demonstrate compliance with CO emission limit(s). The operator shall comply with all general testing, reporting, and recordkeeping requirements in Sections E and K of this permit.

[RULE 1146, 11-17-2000; RULE 1146, 9-5-2008; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 407, 4-2-1982]

[Devices subject to this condition : D92, D215, D216, D217, D249, D250, D385]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

D330.1 The operator shall have a person that has been trained in accordance with Rule 461 conduct a semi-annual inspection of the gasoline transfer and dispensing equipment. The first inspection shall be in accordance with Rule 461, Attachment B, the second inspection shall be in accordance with Rule 461, Attachment C, and the subsequent inspections shall alternate protocols. The operator shall keep records of the inspection and the repairs in accordance to Rule 461 and Section K of this Permit.

[**RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 461, 6-3-2005; RULE 461, 3-7-2008**]

[Devices subject to this condition : D734, D1320]

E. Equipment Operation/Construction Requirements

E51.2 The following condition number(s) shall not apply if any of the requirements stated below are met:

Condition Number E 71- 4

Requirement number 1: The gas turbine is in the start-up mode.

Requirement number 2: Device ID C1536 (Selective Catalytic Reduction) is in full operation

[**RULE 2012, 5-6-2005**]

[Devices subject to this condition : D810]

E51.4 The following condition number(s) shall not apply if any of the requirements stated below are met:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Condition Number E 71- 4

Requirement number 1: The gas turbine is in the start-up mode.

Requirement number 2: Device ID C1538 (Selective Catalytic Reduction) is in full operation

[RULE 2012, 5-6-2005]

[Devices subject to this condition : D812]

E54.3 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C788 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The heater is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D388]

E54.4 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C786 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The heater is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D386, D387]

E54.5 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C784 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The heater is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D384, D385]

E54.6 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C775 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The heater is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D247, D248, D249]

E54.7 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Device ID: C771 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The heater is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D770]

E54.8 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C778 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The furnace is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D777]

E54.9 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C768 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The heater is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D33]

E54.10 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C778 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: The boiler is in either start-up or shutdown mode.

Requirement number 2: The SCR inlet temperature is less than 550 Deg F.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D1122]

E54.13 The operator is not required to vent this equipment to the following equipment if all of the requirements listed below are met:

Device ID: C788 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: Bypass is allowed for activities directly related to repair, maintenance, and the resetting of the damper following a stack damper trip

Requirement number 2: The CEMS shall be fully operational and certified to the levels of emissions with and without bypass

Requirement number 3: Total periods of bypass do not exceed 240 hours per year

Requirement number 4: The operator shall submit an annual report to the District with a summary of the number of hours the SCR was bypassed, and the description of the reason for each bypass. The annual report is due March 1 of each year

[RULE 2012, 5-6-2005]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D388]

E54.14 The operator is not required to vent this equipment to the following equipment if all of the requirements listed below are met:

Device ID: C786 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: Bypass is allowed for activities directly related to repair, maintenance, and the resetting of the damper following a stack damper trip

Requirement number 2: The CEMS shall be fully operational and certified to the levels of emissions with and without bypass

Requirement number 3: Total periods of bypass do not exceed 240 hours per year

Requirement number 4: The operator shall submit an annual report to the District with a summary of the number of hours the SCR was bypassed, and the description of the reason for each bypass. The annual report is due March 1 of each year

[RULE 2012, 5-6-2005]

[Devices subject to this condition : D386, D387]

E54.15 The operator is not required to vent this equipment to the following equipment if all of the requirements listed below are met:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Device ID: C784 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: Bypass is allowed for activities directly related to repair, maintenance, and the resetting of the damper following a stack damper trip

Requirement number 2: The CEMS shall be fully operational and certified to the levels of emissions with and without bypass

Requirement number 3: Total periods of bypass do not exceed 240 hours per year

Requirement number 4: The operator shall submit an annual report to the District with a summary of the number of hours the SCR was bypassed, and the description of the reason for each bypass. The annual report is due March 1 of each year

[RULE 2012, 5-6-2005]

[Devices subject to this condition : D384, D385]

E54.16 The operator is not required to vent this equipment to the following equipment if all of the requirements listed below are met:

Device ID: C775 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: Bypass is allowed for activities directly related to repair, maintenance, and the resetting of the damper following a stack damper trip

Requirement number 2: The CEMS shall be fully operational and certified to the levels of emissions with and without bypass

Requirement number 3: Total periods of bypass do not exceed 240 hours per year

Requirement number 4: The operator shall submit an annual report to the District with a summary of the number of hours the SCR was bypassed, and the description of the reason for each bypass. The annual report is due March 1 of each year

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 2012, 5-6-2005]

[Devices subject to this condition : D247, D248, D249]

E54.17 The operator is not required to vent this equipment to the following equipment if all of the requirements listed below are met:

Device ID: C768 [SELECTIVE CATALYTIC REDUCTION]

Requirement number 1: Bypass is allowed for activities directly related to repair, maintenance, and the resetting of the damper following a stack damper trip

Requirement number 2: The CEMS shall be fully operational and certified to the levels of emissions with and without bypass

Requirement number 3: Total periods of bypass do not exceed 240 hours per year

Requirement number 4: The operator shall submit an annual report to the District with a summary of the number of hours the SCR was bypassed, and the description of the reason for each bypass. The annual report is due March 1 of each year

[RULE 2012, 5-6-2005]

[Devices subject to this condition : D33]

E54.18 The operator is not required to vent this equipment to the following equipment if any of the requirements listed below are met:

Device ID: C472 [[ADSORBER V2315/V2316] and C473[ADSORBER V2313/V2314]]

Requirement number 1: This equipment is vented to the Vapor Recovery System (Process 21 System 3) which is in full use

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

**[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002; RULE
1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]**

[Devices subject to this condition : D463, D464, D465, D471]

E57.1 The operator shall vent this equipment to scrubber C232 whenever scrubbers C761 and C762 are shutdown for breakdown or maintenance.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D505]

E71.1 The operator shall only use this equipment for holding excess storm water, or holding separator effluent water in the event of mechanical problems or upset conditions in the final effluent treating units. It may also be used for surge storage of fresh water during plant water well outage. This equipment shall be completely emptied as soon as possible after receipt of effluent water.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D688]

E71.3 The operator shall only use this equipment to process the sludge from Equipment ID D469 (TK-6002/6003).

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D703]

E71.4 The operator shall only operate this equipment if the water injection is in full operation.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D810, D812]

E71.5 The operator shall only use this equipment if the pH of the caustic solution in this equipment is maintained at equal or greater than 10.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : C232]

E71.6 The operator shall only use this equipment for loading spent caustic solution having pH equal or greater than 10.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D798]

E71.7 The operator shall only inject anhydrous ammonia into this equipment if the flue gas inlet temperature to this equipment is 550 degrees F or higher.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : C764, C768, C771, C773, C775, C778, C784, C786, C788]

E71.8 The operator shall only use this equipment for processing storm and rain water run-off.

[RULE 1303(b)(2)-Offset, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D697, D700]

E71.10 The operator shall only use this equipment for storing waste water discharged from laboratory operations.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D1095]

E71.11 The operator shall only operate this equipment if the caustic solution is maintained at a minimum height of 1 FT.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : C232]

E71.12 The operator shall only limit the product deliveries to this equipment to no more than 61 trucks per year. The operator shall use the purchases invoices and other records to demonstrate compliance with the number of truck deliveries of Ammonia.

[RULE 1303, 5-10-1996; RULE 1303, 12-6-2002]

[Devices subject to this condition : D311]

E71.13 The operator shall not operate this equipment if V-822 (D1287) Catalyst Loading Pot is in operation.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D1573]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

- E73.1 Notwithstanding the requirements of Section E conditions, the operator may, at his discretion, choose not to use ammonia injection if any of the following requirement(s) are met:

The inlet exhaust temperature to the SCR reactor is 450 degrees F or less

condition E71.4 is met

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : C1536, C1538]

- E73.2 Notwithstanding the requirements of Section E conditions, the operator may, at his discretion, choose not to use ammonia injection if any of the following requirement(s) are met:

the filterable PM10 emissions to the atmosphere are: 3.6 lbs/hr when the feed rate to the FCCU is equal to or lower than 30.9 thousand barrels per day and 2.8 lbs per 1000 bbl fresh feed when the feed rate is greater than 30.9 thousand barrels per day

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

- E73.3 Notwithstanding the requirements of Section E conditions, the operator is not required to use more than one flare gas recovery compressor if:

The load on the flare gas recovery system is not sufficient to require more than one flare gas recovery compressor to be online

[RULE 1118, 11-4-2005]

[Devices subject to this condition : D1600, D1601, D1602, D1603, D1604]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

E102.1 The operator shall discharge dust collected in this equipment only into closed containers.

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 401, 3-2-1984; RULE 401, 11-9-2001]

[Devices subject to this condition : C1574]

E131.1 The operator shall maintain a vapor-tight seal between the adaptor and compartment hatch when loading fresh or spent acid.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 402, 5-7-1976]

[Devices subject to this condition : D505]

E153.1 The operator shall change over the carbon in the adsorber whenever breakthrough occurs.

For the purpose of this condition, breakthrough occurs when the hydrocarbon monitor reading indicates a concentration of 500 ppmv at the outlet of the last carbon adsorber. The 500 ppmv refers to VOC concentration.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : C472, C473, C699, C702, C1096]

E179.1 For the purpose of the following condition number(s), continuously record shall be defined as once every hour and shall be calculated upon average of the continuous monitoring for that hour.

Condition Number D 12- 6

Condition Number D 12- 7

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 2012, 5-6-2005]

[Devices subject to this condition : C1536, C1538]

E179.2 For the purpose of the following condition number(s), continuously record shall be defined as once every month and shall be calculated upon average of the continuous monitoring for that month.

Condition Number D 12- 8

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 2012, 5-6-2005]

[Devices subject to this condition : C1536, C1538]

E193.1 The operator shall operate and maintain this equipment according to the following specifications:

The operator shall comply with all applicable requirements specified in Section 60.18 of the 40 CFR60 Subpart A

[40CFR 60 Subpart A, 6-13-2007]

[Devices subject to this condition : C747, C748]

E193.3 The operator shall operate and maintain this equipment as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Whenever the ESP system (Devices C1575, C1576 and C1577) is in operation and venting the FCCU Regenerator Catalyst fine exhaust, the operator shall maintain in operation a minimum of 2 of 3 ESP units , each with a minimum of 7 of 8 active transformer/rectifier sets.

The operator shall not operate the FCCU if emissions from the FCCU to the atmosphere exceed the following limits for filterable PM10: 3.6 lbs/hr when the fresh feed to the FCCU is equal to or less than 30.9 thousand barrels per day, and 2.8 lbs per 1000 bbl fresh feed when the feed rate is greater than 30.9 thousand barrels per day.

[RULE 1105.1, 11-7-2003]

[Devices subject to this condition : C1575, C1576, C1577]

E193.4 The operator shall operate and maintain this equipment according to the following requirements:

The operator shall discharge dust collected in the ESP's only into leak-free hoppers or closed container bins equipped with fabric sock filters. The dust from these hoppers shall be loaded into vacuum trucks which are leak-free.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002; RULE 401, 3-2-1984; RULE 401, 11-9-2001]

[Devices subject to this condition : C1575, C1576, C1577]

E193.5 The operator shall operate and maintain this equipment according to the following requirements:

To maintain the PM10 average daily value to 26 lbs or below from this equipment H-101 (D32), the DCU Propane Vaporizer E-1465 (D1616-P2S1) will only operate when the DCU Sponge Oil Absorber V-910 (D1143-P2S1) is in operation

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D32]

E313.1 This device is classified as a non-operated major SO_x and NO_x source as defined under Rules 2011 and 2012 and shall not be operated unless the Facility Permit holder provides written notification to the Executive Officer 30 days prior to starting operation. In order to maintain the non-operational classification, the Facility Permit holder shall:

- (a) Remove a section of the fuel feed line(s) to the device and place a blind flange on both ends of the fuel feed line(s); and
- (b) Remove all burners.

Removal of parts or components solely to qualify the device for non-operated classification pursuant to this condition, or replacement of the same removed parts or components resulting in the device no longer being classified as non-operated shall not be deemed to affect the potential to emit within the meanings of Rule 2005, Regulation XIII and Regulation XXX.

[RULE 2011, 5-6-2005; RULE 2012, 5-6-2005]

[Devices subject to this condition : D91, D194, D196, D251]

E315.1 Once this device is operated, it shall no longer be classified as non-operational. This device shall also meet the monitoring requirements of Rules 2011 and 2012, subparagraph (c)(2)(A) or (c)(2)(B) no later than 30 calendar days after the start of operation except as provided in Rule 2011, paragraph (c)(11) and Rule 2012, paragraph (c)(10).

[RULE 2011, 5-6-2005; RULE 2012, 5-6-2005]

[Devices subject to this condition : D91, D194, D196, D251]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

E336.1 The operator shall vent the vent gases from this equipment as follows:

This equipment shall not be operated unless the vapor recovery system/carbon adsorber is in full use and has a valid permit to receive vent gases from this equipment.

All vent gases from the vacuum trucks used in transferring bottom sludges of this equipment shall be directed to the vapor recovery system or carbon adsorber.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Devices subject to this condition : D469]

E336.2 The operator shall vent the vent gases from this equipment as follows:

All vent gases under normal operating conditions shall be directed to a vapor recovery system consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases.

This equipment shall not be operated unless the vapor recovery system is in full use and has a valid permit to receive vent gases from this equipment.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D458, D459, D460, D461, D462, D466, D467, D520, D521, D526, D531, D533, D534, D544, D546, D547, D548, D550, D551, D552, D553, D554, D555, D556, D557, D558, D559, D560, D561, D562, D563, D564, D565, D566, D567, D569, D571, D572, D573, D574, D575, D576, D577, D578, D579, D584, D585, D589, D592, D594, D595, D596, D597, D598, D600, D602, D604, D606, D607, D608, D611, D615, D616, D619, D620, D622, D623, D625, D626, D627, D628, D631, D633, D634, D636, D637, D639, D640, D807, D808, D809, D982, D998, D1001, D1002, D1500, D1670, D1671, D1672, D1673, D1712]

E336.3 The operator shall vent the vent gases from this equipment as follows:

All vent gases under normal operating conditions shall be directed to the DCU Blowdown Recovery system.

This equipment shall not be operated unless the above vapor recovery system is in full use and has a valid permit to receive vent gases from this equipment.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Devices subject to this condition : D20]

E336.4 The operator shall vent the vent gases from this equipment as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

All vent gases under normal conditions shall be directed to a vapor recovery system or the carbon adsorbers.

The vapor recovery system is consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases

The carbon adsorbers is consisting of activated carbon connected in series, each 1,000 pounds, C472 and C473

This equipment shall not be operated unless the vapor recovery system or the carbon adsorbers are in full use and have a valid permit to receive vent gases from this equipment.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Devices subject to this condition : D463, D464, D465, D471]

E440.1 The operator shall operate and maintain this equipment according to the following specifications:

The requirement of condition E336.2 does not apply when the commodity being stored in this equipment is only Metropolitan Water or water supplied by the Los Angeles Department of Water and Power for the sole purpose of supplying water for the refinery firewater system and the operator demonstrate that the tank has been degassed pursuant to Rule 1149 and the hydrocarbon vapor pressure at storage condition does not exceed 0.1 psia as determined by SCAQMD Method 25.3

The following equation will use the results of SCAQMD Method 25.3 to convert from ppm to psia: $P(\text{voc}) = (\text{ppm}/1000000) \times P_t$; where $P_t = \text{atmospheric pressure} = 14.7 \text{ psia}$

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Devices subject to this condition : D552, D553]

E440.2 The operator shall operate and maintain this equipment according to the following specifications:

The operator shall notify the primary SCAQMD inspector for the refinery in writing and by e-mail (Refinery_Compliance@aqmd.gov) whenever (1) the commodity is switched from water to organic liquid, (2) the commodity is switched from organic liquid to water and (3) water or organic liquid is introduced into an empty tank. The notification shall be made within 5 days of any changes in commodity as described above and shall include the vapor pressure of liquid at storage condition expressed in the unit of psia

[RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Devices subject to this condition : D552, D553]

E448.1 The operator shall comply with the following requirements:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

The operator shall maintain the SCR bypass stack dampers for heaters D214, D215, D216 and D217 at a fully closed position such that no emissions will be exhausted through the bypass stacks whenever fuel is supplied to the heaters.

The operator shall install and maintain damper limit switches or other equivalent device to accurately indicate the fully closed position of the SCR bypass stack dampers.

The operator shall record the position of the dampers at least once every 15 minutes and any time the damper position changes.

The operator shall install and maintain an automatic fuel shutoff system to cut off the fuel supply to this device whenever any of the bypass stack dampers is not in the fully closed position.

The operator shall maintain records in a manner approved by the District to demonstrate compliance with the requirements specified under this condition.

[RULE 2012, 5-6-2005]

[Devices subject to this condition : D214, D215, D216, D217]

H. Applicable Rules

H23.1 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	Kb

[40CFR 60 Subpart Kb, 10-15-2003]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D469, D524, D593, D598, D599, D603, D613, D614, D617, D624, D630, D648, D982, D1001, D1002, D1078]

H23.2 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	Ka

[40CFR 60 Subpart Ka, 12-14-2000]

[Devices subject to this condition : D581]

H23.3 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
H2S	40CFR60, SUBPART	J

[40CFR 60 Subpart J, 6-24-2008; CONSENT DECREE, 3-21-2001]

[Devices subject to this condition : D9, D32, D33, D89, D90, D91, D92, D112, D120, D146, D157, D158, D194, D196, D214, D215, D216, D217, D218, D247, D248, D249, D250, D251, D384, D385, D386, D387, D388, D722, D723, D724, D725, D770, D777]

H23.4 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

VOC | 40CFR60, SUBPART | GGG

[40CFR 60 Subpart GGG, 6-2-2008]

[Devices subject to this condition : D68, D140, D156, D176, D333, D377, D642, D901, D918, D1082, D1194, D1338]

H23.5 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1173

[RULE 1173, 5-13-1994; RULE 1173, 2-6-2009]

[Devices subject to this condition : D1354, D1355, D1359, D1361, D1362, D1363, D1366, D1367, D1399, D1415, D1416, D1419, D1425, D1443, D1444, D1459, D1460, D1461, D1465, D1466, D1467, D1469, D1470, D1471, D1473, D1477, D1553, D1556, D1557, D1561]

H23.9 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	K

[40CFR 60 Subpart K, 10-17-2000]

[Devices subject to this condition : D634]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

H23.10 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	K
Benzene	40CFR61, SUBPART	FF

[40CFR 60 Subpart K, 10-17-2000; 40CFR 61 Subpart FF, 12-4-2003]

[Devices subject to this condition : D633]

H23.12 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
Refrigerants	District Rule	1415

[RULE 1415, 10-14-1994]

[Devices subject to this condition : E1487, E1488]

H23.13 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
Chromium, Hexavalent	District Rule	1404

[RULE 1404, 4-6-1990]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : E1489]

H23.14 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1122

[RULE 1122, 10-1-2004]

[Devices subject to this condition : E1492]

H23.16 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1173
VOC	40CFR60, SUBPART	GGG

[RULE 1173, 5-13-1994; RULE 1173, 2-6-2009; 40CFR 60 Subpart GGG, 6-2-2008]

[Devices subject to this condition : D922, D923, D1357, D1365, D1380, D1381, D1384, D1392, D1446, D1447, D1448, D1449, D1451, D1453, D1454, D1455, D1456, D1458, D1472, D1562, D1682, D1683]

H23.17 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	QQQ

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[40CFR 60 Subpart QQQ, 10-17-2000]

[Devices subject to this condition : D1495, D1496]

H23.18 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
NOX	40CFR60, SUBPART	GG
H2S	40CFR60, SUBPART	J
SOX	40CFR60, SUBPART	GG
CO	District Rule	1134

[RULE 1134, 8-8-1997; 40CFR 60 Subpart GG, 2-24-2006; 40CFR 60 Subpart J, 6-24-2008]

[Devices subject to this condition : D810, D812]

H23.25 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	463
VOC	District Rule	1149
VOC	District Rule	1178

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : D657, D688, D1001, D1002]

H23.27 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	109

[RULE 109, 5-2-2003]

[Devices subject to this condition : E1491, E1499]

H23.29 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
NOX	40CFR60, SUBPART	Db
H2S	40CFR60, SUBPART	J

[40CFR 60 Subpart Db, 1-28-2009; 40CFR 60 Subpart J, 6-24-2008]

[Devices subject to this condition : D1122]

H23.31 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1178
VOC	District Rule	463

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

For Rule 463 applicability, only subdivision (d) in the March 11,1994 amendment, or equivalent requirements in the future amendments, shall apply to domed external floating roof tanks. This does not preclude any requirements specified in Rule 1178

[RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Devices subject to this condition : D648]

H23.32 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
CO	40CFR60, SUBPART	J
PM	40CFR60, SUBPART	J
Visible Emissions	40CFR60, SUBPART	J
SOX	40CFR60, SUBPART	J

[40CFR 60 Subpart J, 6-24-2008]

[Devices subject to this condition : D96]

H23.33 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	463
VOC	District Rule	1149
VOC	District Rule	1178
VOC	40CFR60, SUBPART	Kb

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

For Rule 463 applicability, only subdivision (d) in the March 11, 1994 amendment, or equivalent requirements in the future amendments, shall apply to domed external floating roof tanks. This does not preclude any requirements specified in Rule 1178.

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 1178, 4-7-2006; RULE 463, 5-6-2005; 40CFR 60 Subpart Kb, 10-15-2003]

[Devices subject to this condition : D561, D564, D639, D659]

H23.36 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
PM	District Rule	1470

[RULE 1470, 5-4-2012]

[Devices subject to this condition : D1617, D1618, D1645, D1646, D1692, D1693, D1694]

H23.38 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
SOX	District Rule	1118

[RULE 1118, 11-4-2005]

[Devices subject to this condition : C747, C748]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

H23.40 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
Benzene	40CFR61, SUBPART	FF

[40CFR 61 Subpart FF, 12-4-2003]

[Devices subject to this condition : D458, D459, D460, D461, D462, D463, D464, D465, D466, D467, D469, D471, C472, C473, D526, D544, D546, D562, D563, D565, D567, D572, D573, D575, D576, D577, D578, D579, D608, D611, D623, D625, D626, D627, D628, D633, D639, D703, D709, D1095, C1096, D1304, D1480, D1481, D1482, D1483, D1484, D1485]

H23.41 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
CO	40CFR60, SUBPART	III
PM	40CFR60, SUBPART	III
Non-Methane Hydrocarbons	40CFR60, SUBPART	III
NOX	40CFR60, SUBPART	III

[40CFR 60 Subpart III, 7-11-2006]

[Devices subject to this condition : D1692, D1693, D1694]

J. Rule 461

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

J109.1 The operator shall use, except for diesel transfer, the phase I vapor recovery system in full operation whenever this equipment is in use. This system shall be installed, operated and maintained to meet all CARB certification requirements.

[RULE 461, 6-3-2005; RULE 461, 3-7-2008]

[Devices subject to this condition : D728, D1321]

J110.1 The operator shall use, except for diesel transfer, the phase II vapor recovery system in full operation whenever gasoline from this equipment is dispensed to motor vehicles as defined in Rule 461. This system shall be installed, operated and maintained to meet all CARB certification requirements.

[RULE 461, 6-3-2005; RULE 461, 3-7-2008]

[Devices subject to this condition : D734, D1320]

J119.1 A CARB certified pressure/vacuum relief valve shall be installed on the tank vent stack and shall be set as specified in G-70-116

[RULE 461, 6-3-2005; RULE 461, 3-7-2008]

[Devices subject to this condition : D728, D1321]

K. Record Keeping/Reporting

K67.2 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

Throughput and vapor pressure of stored liquid.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 463, 5-6-2005]

[Devices subject to this condition : D520, D521, D531, D533, D534, D543, D544, D546, D548, D549, D554, D555, D556, D558, D559, D560, D562, D563, D565, D566, D567, D568, D569, D571, D572, D573, D575, D576, D577, D578, D579, D581, D582, D583, D584, D585, D586, D587, D588, D591, D592, D594, D596, D597, D598, D604, D605, D609, D610, D611, D612, D615, D616, D619, D620, D622, D623, D625, D626, D627, D628, D629, D631, D632, D633, D634, D635, D636, D637, D640, D647, D648, D649, D650, D651, D652, D653, D654, D655, D656, D658, D1001, D1002, D1095, D1500, D1555]

K67.4 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

For architectural applications where no thinners, reducers, or other VOC containing materials are added, maintain semi-annual records for all coating consisting of (a) coating type, (b) VOC content as supplied in grams per liter (g/l) of materials for low-solids coatings, (c) VOC content as supplied in g/l of coating, less water and exempt solvent, for other coatings.

For architectural applications where thinners, reducers, or other VOC containing materials are added, maintain daily records for each coating consisting of (a) coating type, (b) VOC content as applied in grams per liter (g/l) of materials used for low-solids coatings, (c) VOC content as applied in g/l of coating, less water and exempt solvent, for other coatings.

[RULE 1113, 11-8-1996; RULE 1113, 7-13-2007; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : E1493]

K67.8 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Throughput in barrels per calendar month

Vapor pressure of stored liquid in psia

Other records that may be required to comply with the applicable requirements of District Rules 463 and 1178

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 463, 5-6-2005]

[Devices subject to this condition : D557, D561, D564, D595, D606, D607, D982]

K67.9 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

Hydrocarbon concentration measurements done in the vapor space above the floating roof of the tank

Throughput in barrels per calendar month

Vapor pressure of stored liquid in psia

Other records that may be required to comply with the applicable requirements of District Rules 463 and 1178

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 463, 5-6-2005]

[Devices subject to this condition : D659, D660]

K67.10 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

Material Stored (Ammonia)

The purchase invoices to determine the truck deliveries of ammonia.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

[RULE 3004(a)(1), 12-12-1997]

[Devices subject to this condition : D311]

K67.11 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

Throughput and vapor pressure of stored liquid in psia, when the tank is not storing firewater.

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 463, 5-6-2005]

[Devices subject to this condition : D552, D553]

K67.12 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

Throughput in barrels per calendar month

Commodity/product stored and time period of its storage

Actual vapor pressure of stored liquid in psia, of each commodity/product stored

Hydrocarbon concentration measurements done in the vapor space above the floating roof of the tank

Other records that may be required to comply with the applicable requirements of District Rules 463, 1149 and 1178, 40CFR60, Subpart Kb, and 40CFR63, Subpart CC

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 463, 5-6-2005]

[Devices subject to this condition : D630]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

K67.13 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

An engine operating log shall be maintained which on a monthly basis shall include manual and automatic operation and shall list all engine operations in each of the following areas:

- A. Emergency use hours of operation
- B. Maintenance and testing hours
- C. Other operating hours(describe the reason for operation)

In addition, each time the engine is manually started, the log shall include the date of operation, the specific reason for operation and the timer reading in hours and tenths of hours at the beginning and end of operation. The log shall be kept for a minimum of five calendar years prior to the current year and made available to District personnel upon request.

The total hours of operation and the total hours of operation for maintenance and testing for the previous calendar year shall be recorded sometime during the first 15 days of January of each year

[RULE 1110.2, 2-1-2008; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002; RULE 1470, 5-4-2012]

[Devices subject to this condition : D713, D714, D1100, D1101, D1102, D1103, D1104, D1617, D1618, D1645, D1646, D1692, D1693, D1694]

K67.15 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Throughput and vapor pressure of stored liquid

Hydrocarbon concentration measurements done in the vapor space above the floating roof of the tank

Other records that may be required to comply with the applicable requirements of District Rules 463, 1149 and 1178

[RULE 1178, 4-7-2006; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 463, 5-6-2005]

[Devices subject to this condition : D593, D599, D603, D613, D614, D617, D618, D621, D624]

K67.16 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

Throughput in barrels per calendar month or per year as required in the throughput condition

Commodity/product stored and time period of its storage

Actual vapor pressure of stored liquid in psia, of each commodity/product stored

Other records that may be required to comply with the applicable requirements of District Rules 463 ,1149 and 1178

[RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 463, 5-6-2005]

[Devices subject to this condition : D547, D551]

K67.17 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

Throughput of stored liquid.

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997]

[Devices subject to this condition : D1533, D1670, D1671, D1672, D1673, D1712]

K67.18 The operator shall keep records, in a manner approved by the District, for the following parameter(s) or item(s):

The name of the person performing the inspection and/or maintenance of the filter media

The date, time, and results of the filter media inspection

The date, time, and description of any maintenance or repairs resulting from the filter media inspection

[RULE 1105.1, 11-7-2003; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 401, 11-9-2001; RULE 404, 2-7-1986; RULE 405, 2-7-1986]

[Devices subject to this condition : C1574]

K171.2 The operator shall provide to the District the following items:

Final drawings and/or specifications of the geodesic dome cover to be installed/constructed shall be submitted to the District within 30 days after its construction

[RULE 1178, 4-7-2006]

[Devices subject to this condition : D651, D658]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION D: FACILITY DESCRIPTION AND EQUIPMENT SPECIFIC CONDITIONS

The operator shall comply with the terms and conditions set forth below:

K171.3 The operator shall provide to the District the following items:

Final drawings and/or specifications of the internal floating roof to be installed/constructed shall be submitted to the District within 30 days after its construction

[RULE 1178, 4-7-2006]

[Devices subject to this condition : D593, D599, D603, D613, D614, D617, D618, D621, D624]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 2: COKING AND RESIDUAL CONDITIONING					P13.1
System 10: VACUUM DISTILLATION					S13.4, S15.2, S31.5
TOWER, VACUUM, V-3593, DIAMETER:15 FT(TOP), 26 FT(MIDDLE), 10 FT(BOTTOM);HEIGHT:121FT6IN A/N: 526722 Permit to Construct Issued: 12/08/11	D1700				H23.39, L341.4
VESSEL, VACUUM JET HOT WELL, FC-132 (V-928), LENGTH: 20 FT ; DIAMETER: 4 FT A/N: 526722 Permit to Construct Issued: 12/08/11	D13				
ABSORBER, AMINE, FC-160 (V-937), VACUUM VENT GAS, HEIGHT: 28 FT 6 IN; DIAMETER: 3 FT A/N: 526722 Permit to Construct Issued: 12/08/11	D14				
EJECTOR, ME0937, IST STAGE CONDENSER, E1977 A/N: 526722 Permit to Construct Issued: 12/08/11	D1701				H23.30, L341.4
EJECTOR, ME0938, 2ND STAGE CONDENSER, E1978 A/N: 526722 Permit to Construct Issued: 12/08/11	D1702				H23.30, L341.4
EJECTOR, ME0939, 2ND STAGE CONDENSER, E1979 A/N: 526722 Permit to Construct Issued: 12/08/11	D1703				H23.30, L341.4
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 526722 Permit to Construct Issued: 12/08/11	D1557			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.5, H23.39

- | | |
|--|--|
| * (1) (1A) (1B) Denotes RECLAIM emission factor
(3) Denotes RECLAIM concentration limit
(5) (5A) (5B) Denotes command and control emission limit
(7) Denotes NSR applicability limit
(9) See App B for Emission Limits | (2) (2A) (2B) Denotes RECLAIM emission rate
(4) Denotes BACT emission limit
(6) Denotes air toxic control rule limit
(8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
(10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
System 1: FCCU RECOVERY SECTION					S13.4, S15.2, S15.12, S31.1
ABSORBER, V-406, HEIGHT: 64 FT 4 IN; DIAMETER: 4 FT 6 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D78				
TOWER, SPLITTER, HEAVY NAPHTHA, V-407, HEIGHT: 47 FT ; DIAMETER: 5 FT 6 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D1267				
TOWER, RERUN, V-408, HEIGHT: 82 FT ; DIAMETER: 7 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D1268				
TOWER, SPLITTER, LIGHT NAPHTHA, V-409, HEIGHT: 60 FT ; DIAMETER: 8 FT 6 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D1269				
COLUMN, DEPROPANIZER, V-410A, HEIGHT: 99 FT 6 IN; DIAMETER: 6 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D1718				
ACCUMULATOR, V-413, HEIGHT: 10 FT ; DIAMETER: 5 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D79				
DRUM, V-414, RERUN REFLUX A/N: 535089 Permit to Construct Issued: 11/02/12	D915				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
ACCUMULATOR, V-415, SPLITTER TOWER REFLUX, HEIGHT: 19 FT ; DIAMETER: 5 FT 7 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D80				
ACCUMULATOR, V-416, DEPROPANIZER TOWER REFLUX, LENGTH: 19 FT ; DIAMETER: 6 FT 6 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D81				
DRUM, DRYING, LOW PRESSURE, V-419, HEIGHT: 20 FT ; DIAMETER: 10 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D82				
VESSEL, SURGE, V-423, AVGAS CHARGE, HEIGHT: 19 FT ; DIAMETER: 7 FT 7 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D84				
DRUM, DRYING, V-424, RERUN TOWER GAS, HEIGHT: 10 FT ; DIAMETER: 3 FT 6 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D85				
KNOCK OUT POT, FLARE, V-431, LENGTH: 13 FT ; DIAMETER: 6 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D1271				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
DRUM, PRESSURE RELIEVING SEAL, V-432, HEIGHT: 43 FT ; DIAMETER: 4 FT 4 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D86			HAP: (10) [40CFR 63 Subpart CC, #2, 6-23-2003]	
POT, DEETHANIZER WATER DRAIN, V-547, HEIGHT: 6 FT ; DIAMETER: 1 FT 6 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D1273				
DRUM, WATER DRAW-OFF, V-675, LENGTH: 4 FT 8 IN; DIAMETER: 4 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D1275				
KNOCK OUT POT, VAPOR RECOVERY, V-676, LENGTH: 4 FT 4 IN; DIAMETER: 2 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D1272				
KNOCK OUT POT, V-1100, NAPHTHA, LENGTH: 12 FT 6 IN; DIAMETER: 3 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D912				
TOWER, DEBUTANIZER, V-1547, HEIGHT: 100 FT 6 IN; DIAMETER: 7 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D1280				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
COLUMN, DEETHANIZER, V-1548, HEIGHT: 12 FT 6 IN; DIAMETER: 6 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D910				
ACCUMULATOR, V-1549, DEBUTANIZER REFLUX, HEIGHT: 20 FT ; DIAMETER: 7 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D913				
KNOCK OUT POT, V-1789, PROPANE/PROPYLENE, HEIGHT: 8 FT 6 IN; DIAMETER: 24 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D909				
COMPRESSOR, RERUN TOWER GAS, C-43/44, 2 TOTAL, 4 CYLINDERS A/N: 535089 Permit to Construct Issued: 11/02/12	D87				
COMPRESSOR, C-142, WET GAS A/N: 535089 Permit to Construct Issued: 11/02/12	D918				H23.4
VESSEL, SEPARATOR, HIGH PRESSURE, V-2343, LENGTH: 22 FT ; DIAMETER: 8 FT A/N: 535089 Permit to Construct Issued: 11/02/12	D1597				
VESSEL, SEPARATOR, SOUR WATER FLASH , V-2344, LENGTH: 25 FT ; DIAMETER: 8 FT 6 IN A/N: 535089 Permit to Construct Issued: 11/02/12	D1598				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 3: FLUID CATALYTIC CRACKING (FCCU)					P13.1
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 535089 Permit to Construct Issued: 11/02/12	D1365			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
Process 9: ALKYLATION					P13.1
System 1: ALKYLATION UNIT					S13.4, S15.2, S15.5, S31.1, S31.4
FILTER, SALT, V-579, PROPANE, LENGTH: 25 FT 4 IN; DIAMETER: 5 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D390				
VESSEL, SALT DRIER, V-582, LENGTH: 15 FT 8 IN; DIAMETER: 4 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D391				
VESSEL, V-1407, BUTYLENE COALESCER, LENGTH: 13 FT 2 IN; DIAMETER: 3 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D392				
VESSEL, COALESCER, V-1408, OLEFIN, LENGTH: 10 FT 5 IN; DIAMETER: 1 FT 8 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D393				
SETTLING TANK, 1ST STAGE, V-1409, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D394				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
SETTLING TANK, 2ND STAGE, V-1410, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D395				
TANK, FLASH, V-1411, REACTOR EFFLUENT, LENGTH: 30 FT 6 IN; DIAMETER: 8 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D396				
TANK, FLASH, V-1414, REFRIGERANT, LENGTH: 24 FT ; DIAMETER: 6 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D397				
ACCUMULATOR, V-1416, REFRIGERANT, LENGTH: 18 FT ; DIAMETER: 5 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D399				
ACCUMULATOR, V-1953, DEPROPANIZER FEED, LENGTH: 20 FT ; DIAMETER: 4 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D400				
DRUM, BLOWDOWN, V-1418, ACID, LENGTH: 27 FT ; DIAMETER: 10 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D401				
SCRUBBER, CAUSTIC, V-1419, ACID VAPOR, LENGTH: 16 FT ; DIAMETER: 8 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D402				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
COLUMN, DEETHANIZER, V-1420, LENGTH: 81 FT 6 IN; DIAMETER: 5 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D403				
ACCUMULATOR, V-1421, DEETHANIZER OVERHEAD, LENGTH: 80 FT ; DIAMETER: 5 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D404				
POT, V-1422, DEETHANIZER REBOILER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D405				
SETTLING TANK, V-1423, DEPROPANIZER CAUSTIC WASH, LENGTH: 30 FT ; DIAMETER: 6 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D406				
SETTLING TANK, V-1424, DEPROPANIZER WATER WASH, LENGTH: 26 FT ; DIAMETER: 6 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D407				
VESSEL, PRECIPITATOR, V-1425, DEPROPANIZER FEED, HEIGHT: 12 FT ; DIAMETER: 6 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D408				

- * (1) (1A) (1B) Denotes RECLAIM emission factor
- (3) Denotes RECLAIM concentration limit
- (5) (5A) (5B) Denotes command and control emission limit
- (7) Denotes NSR applicability limit
- (9) See App B for Emission Limits
- (2) (2A) (2B) Denotes RECLAIM emission rate
- (4) Denotes BACT emission limit
- (6) Denotes air toxic control rule limit
- (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
- (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
COLUMN, DEPROPANIZER, V-1426, HEIGHT: 118 FT 6 IN; DIAMETER: 7 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D409				
POT, V-1427, DEPROPANIZER REBOILER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D410				
ACCUMULATOR, V-1428, DEPROPANIZER OVERHEAD, LENGTH: 15 FT ; DIAMETER: 6 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D411				
VESSEL, COALESCER, V-2409, PROPANE FREE WATER WITH INTERNAL COALESCER ELEMENT, LENGTH: 8 FT ; DIAMETER: 1 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D1725				
VESSEL, DEGASSER, V-1429, ALKALINE WATER, LENGTH: 8 FT ; DIAMETER: 4 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D949			HAP: (10) [40CFR 63 Subpart CC, #1, 6-23-2003]	
VESSEL, DEGASSER, V-1430, SPENT CAUSTIC, LENGTH: 8 FT ; DIAMETER: 4 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D950				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
DRUM, FLASH, V-1432, HP CONDENSATE, LENGTH: 5 FT ; DIAMETER: 3 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D413				
DRUM, FLASH, V-1433, LP CONDENSATE, LENGTH: 37 FT 4 IN; DIAMETER: 11 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D414				
POT, V-1434, ALKY DIB. CAUSTIC HEATER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D415				
TANK, WASH, V-1435, ALKY DIB CAUSTIC SETTLER, LENGTH: 43 FT ; DIAMETER: 9 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D416				
TANK, WASH, V-1436, ALKY DIB WATER SETTLER, LENGTH: 40 FT ; DIAMETER: 8 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D417				
VESSEL, PRECIPITATOR, V-1437, ALKY DIB. FEED, LENGTH: 10 FT ; DIAMETER: 10 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D418				
DRUM, V-1438, ALKY DIB. TEA, LENGTH: 9 FT ; DIAMETER: 3 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D419				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
COLUMN, ALKY DIB, V-1439, HEIGHT: 165 FT ; DIAMETER: 11 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D420				
POT, V-1440A/B/C/D, ALKY DIB. REBOILER CONDENSATE, 4 TOTAL, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D421				
ACCUMULATOR, V-1441, ALKY DIB OVERHEAD, LENGTH: 42 FT ; DIAMETER: 10 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D422				
COLUMN, ALKY DEBUTANIZER, V-1442, HEIGHT: 94 FT 9 IN; DIAMETER: 5 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D423				
POT, V-1443, ALKY DEBUTANIZER REBOILER CONDENSATE, LENGTH: 3 FT ; DIAMETER: 1 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D424				
ACCUMULATOR, V-1444, ALKY DEBUTANIZER OVERHEAD, LENGTH: 15 FT ; DIAMETER: 4 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D425				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
ACCUMULATOR, V-1449, V-1450 AND V-2103, S.O. AT E-1277, E1276 AND E-1721, 3 TOTAL, HEIGHT: 2 FT 3 IN; DIAMETER: 1 FT 7 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D431				
KNOCK OUT POT, FLARE, V-1694, LENGTH: 23 FT ; DIAMETER: 8 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D432				
DRUM, FLASH, V-1583, MIXED BUTANE TREATER, CAUSTIC A/N: 551269 Permit to Construct Issued: 01/17/14	D953				
VESSEL, V-1156/7/8/9, K.O. POTS 12001/2/3/4, 4 TOTAL A/N: 551269 Permit to Construct Issued: 01/17/14	D954				
VESSEL, PRECIPITATOR, V-1412, ACID A/N: 551269 Permit to Construct Issued: 01/17/14	D960				
VESSEL, V-1413, SPENT ACID A/N: 551269 Permit to Construct Issued: 01/17/14	D961				
SETTLING TANK, 3RD STAGE, V-2090, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D1080				

* (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
VESSEL, CONTACTOR, E-1721, 9800 SQ.FT., LENGTH: 92 FT ; DIAMETER: 63 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D1081				
COMPRESSOR, C-155, REFRIGERANT, CENTRIFUGAL, BARREL TYPE, 4000 H.P. A/N: 551269 Permit to Construct Issued: 01/17/14	D1082				H23.4
TANK, SETTLING, V-2241, ACID, LENGTH: 50 FT ; DIAMETER: 12 FT 6 IN A/N: 551269 Permit to Construct Issued: 01/17/14	D1504				
VESSEL, V-2242, ISOBUTANE COALESCER, LENGTH: 7 FT 6 IN; DIAMETER: 5 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D1505				
TANK, WASH, V-2250, ACID, LENGTH: 20 FT ; DIAMETER: 12 FT A/N: 551269 Permit to Construct Issued: 01/17/14	D1506				
VESSEL, CONTACTORS NOS. 1 & 2, E-1276 & 1277 A/N: 551269 Permit to Construct Issued: 01/17/14	D959				
VESSEL, CONTACTOR NO. 4, E-1827 A/N: 551269 Permit to Construct Issued: 01/17/14	D1507				

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 9: ALKYLATION					P13.1
COMPRESSOR, C-164, PROPANE, 1455-HP A/N: 551269 Permit to Construct Issued: 01/17/14	D1509				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 551269 Permit to Construct Issued: 01/17/14	D1392			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003]	H23.16
Process 14: LOADING AND UNLOADING					
System 2: TWO-POSITION PROPANE TRUCK LOADING					S15.14, S31.4
BULK MATERIAL LOAD/UNLOAD STATION, TANK TRUCK, PROPANE A/N: 553835 Permit to Construct Issued: 07/24/14	D507				
VESSEL, MERCAPTAN REMOVAL, V-829, SULFUR TRAP ADSORBENT, DESIGN PRESSURE 300 PSI, HEIGHT: 10 FT ; DIAMETER: 4 FT A/N: 553835 Permit to Construct Issued: 07/24/14	D1726				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 553835 Permit to Construct Issued: 07/24/14	D1465				
Process 21: AIR POLLUTION CONTROL					
System 1: REFINERY FLARE					S13.4, S18.2
FLARE, ELEVATED WITH STEAM INJECTION, NO.2, Q-910, JOHN ZINK, MODEL STF-S-30, HEIGHT: 250 FT ; DIAMETER: 2 FT 6 IN A/N: 551270 Permit to Construct Issued: 01/17/14	C747				D12.4, D323.2, E193.1, H23.38

- * (1) (1A) (1B) Denotes RECLAIM emission factor (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
FLARE, ELEVATED WITH STEAM INJECTION, NO.1, Q-913, JOHN ZINK, MODEL STF-S-30, HEIGHT: 250 FT ; DIAMETER: 2 FT 6 IN A/N: 551270 Permit to Construct Issued: 01/17/14	C748				D12.4, D323.2, E193.1, H23.38
KNOCK OUT POT, V-847, FLARE NO. 2, WITH INTERNAL LIQUID SEAL, LENGTH: 24 FT ; DIAMETER: 12 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D752	D1648 D1651			
KNOCK OUT POT, V-848, FLARE NO. 1, WITH INTERNAL LIQUID SEAL, LENGTH: 24 FT ; DIAMETER: 12 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D753	D1648 D1651			
KNOCK OUT POT, V-2369, CRU-HTU NO. 1, LENGTH: 16 FT ; DIAMETER: 8 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D750				
KNOCK OUT POT, V-630, CRU-HTU NO. 2, LENGTH: 19 FT ; DIAMETER: 6 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D751				
KNOCK OUT POT, V-873, CRU NO. 3, LENGTH: 18 FT ; DIAMETER: 9 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D754				
KNOCK OUT POT, V-934, DCU, LENGTH: 25 FT ; DIAMETER: 12 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D755				

- | | |
|--|--|
| <ul style="list-style-type: none"> * (1) (1A) (1B) Denotes RECLAIM emission factor (3) Denotes RECLAIM concentration limit (5) (5A) (5B) Denotes command and control emission limit (7) Denotes NSR applicability limit (9) See App B for Emission Limits | <ul style="list-style-type: none"> (2) (2A) (2B) Denotes RECLAIM emission rate (4) Denotes BACT emission limit (6) Denotes air toxic control rule limit (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.) (10) See section J for NESHAP/MACT requirements |
|--|--|

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Equipment	ID No.	Connected To	RECLAIM Source Type/ Monitoring Unit	Emissions* And Requirements	Conditions
Process 21: AIR POLLUTION CONTROL					
KNOCK OUT POT, V-951, HGU NO. 1, LENGTH: 40 FT ; DIAMETER: 10 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D756				
KNOCK OUT POT, V-1018, HCU, LENGTH: 29 FT ; DIAMETER: 14 FT 6 IN A/N: 551270 Permit to Construct Issued: 01/17/14	D757				
KNOCK OUT POT, V-1431, ALKYLATION UNIT, LENGTH: 35 FT ; DIAMETER: 11 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D758				
KNOCK OUT POT, V-1472, HTU NO. 3, LENGTH: 23 FT 8 IN; DIAMETER: 9 FT 3 IN A/N: 551270 Permit to Construct Issued: 01/17/14	D759				
KNOCK OUT POT, V-1764, HTU-4, HEIGHT: 36 FT ; DIAMETER: 13 FT A/N: 551270 Permit to Construct Issued: 01/17/14	D172				
FUGITIVE EMISSIONS, MISCELLANEOUS A/N: 551270 Permit to Construct Issued: 01/17/14	D1419			HAP: (10) [40CFR 63 Subpart CC, #5A, 6-23-2003; 40CFR 63 Subpart CC, #5A, 10-28-2009]	H23.5

* (1) (1A) (1B) Denotes RECLAIM emission factor
 (2) (2A) (2B) Denotes RECLAIM emission rate
 (3) Denotes RECLAIM concentration limit
 (4) Denotes BACT emission limit
 (5) (5A) (5B) Denotes command and control emission limit
 (6) Denotes air toxic control rule limit
 (7) Denotes NSR applicability limit
 (8) (8A) (8B) Denotes 40 CFR limit (e.g. NSPS, NESHAPS, etc.)
 (9) See App B for Emission Limits
 (10) See section J for NESHAP/MACT requirements

** Refer to section F and G of this permit to determine the monitoring, recordkeeping and reporting requirements for this device.

**FACILITY PERMIT TO OPERATE
TESORO REFINING AND MARKETING CO, LLC**

SECTION H: DEVICE ID INDEX

**The following sub-section provides an index
to the devices that make up the facility
description sorted by device ID.**

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: DEVICE ID INDEX

Device Index For Section H			
Device ID	Section H Page No.	Process	System
D13	1	2	10
D14	1	2	10
D78	2	3	1
D79	2	3	1
D80	3	3	1
D81	3	3	1
D82	3	3	1
D84	3	3	1
D85	3	3	1
D86	4	3	1
D87	5	3	1
D172	16	21	1
D390	6	9	1
D391	6	9	1
D392	6	9	1
D393	6	9	1
D394	6	9	1
D395	7	9	1
D396	7	9	1
D397	7	9	1
D399	7	9	1
D400	7	9	1
D401	7	9	1
D402	7	9	1
D403	8	9	1
D404	8	9	1
D405	8	9	1
D406	8	9	1
D407	8	9	1
D408	8	9	1
D409	9	9	1
D410	9	9	1
D411	9	9	1
D413	10	9	1

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: DEVICE ID INDEX

Device Index For Section H			
Device ID	Section H Page No.	Process	System
D414	10	9	1
D415	10	9	1
D416	10	9	1
D417	10	9	1
D418	10	9	1
D419	10	9	1
D420	11	9	1
D421	11	9	1
D422	11	9	1
D423	11	9	1
D424	11	9	1
D425	11	9	1
D431	12	9	1
D432	12	9	1
D507	14	14	2
C747	14	21	1
C748	15	21	1
D750	15	21	1
D751	15	21	1
D752	15	21	1
D753	15	21	1
D754	15	21	1
D755	15	21	1
D756	16	21	1
D757	16	21	1
D758	16	21	1
D759	16	21	1
D909	5	3	1
D910	5	3	1
D912	4	3	1
D913	5	3	1
D915	2	3	1
D918	5	3	1
D949	9	9	1

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: DEVICE ID INDEX

Device Index For Section H			
Device ID	Section H Page No.	Process	System
D950	9	9	1
D953	12	9	1
D954	12	9	1
D959	13	9	1
D960	12	9	1
D961	12	9	1
D1080	12	9	1
D1081	13	9	1
D1082	13	9	1
D1267	2	3	1
D1268	2	3	1
D1269	2	3	1
D1271	3	3	1
D1272	4	3	1
D1273	4	3	1
D1275	4	3	1
D1280	4	3	1
D1365	6	3	1
D1392	14	9	1
D1419	16	21	1
D1465	14	14	2
D1504	13	9	1
D1505	13	9	1
D1506	13	9	1
D1507	13	9	1
D1509	14	9	1
D1557	1	2	10
D1597	5	3	1
D1598	5	3	1
D1700	1	2	10
D1701	1	2	10
D1702	1	2	10
D1703	1	2	10
D1718	2	3	1

**FACILITY PERMIT TO OPERATE
TESORO REFINING AND MARKETING CO, LLC**

SECTION H: DEVICE ID INDEX

Device Index For Section H			
Device ID	Section H Page No.	Process	System
D1725	9	9	1
D1726	14	14	2

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

FACILITY CONDITIONS

F9.1 Except for open abrasive blasting operations, the operator shall not discharge into the atmosphere from any single source of emissions whatsoever any air contaminant for a period or periods aggregating more than three minutes in any one hour which is:

(a) As dark or darker in shade as that designated No.1 on the Ringelmann Chart, as published by the United States Bureau of Mines; or

(b) Of such opacity as to obscure an observer's view to a degree equal to or greater than does smoke described in subparagraph (a) of this condition.

[RULE 401, 3-2-1984; RULE 401, 11-9-2001]

F14.1 The operator shall not purchase diesel fuel containing sulfur compounds in excess of 15 ppm by weight as supplied by the supplier.

This condition shall become effective on or after June 1, 2004.

[RULE 431.2, 5-4-1990; RULE 431.2, 9-15-2000]

F24.1 Accidental release prevention requirements of Section 112(r)(7):

a). The operator shall comply with the accidental release prevention requirements pursuant to 40 CFR Part 68 and shall submit to the Executive Officer, as a part of an annual compliance certification, a statement that certifies compliance with all of the requirements of 40 CFR Part 68, including the registration and submission of a risk management plan (RMP).

b). The operator shall submit any additional relevant information requested by the Executive Officer or designated agency.

[40CFR 68 - Accidental Release Prevention, 5-24-1996]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

- F25.1 The permit holder of this facility shall not install, alter, or operate a refinery process unit or other non-Rule 219 exempt equipment without a valid RECLAIM/Title V permit issued by the AQMD pursuant to Rule 201 - Permit to Construct, Rule 203 - Permit to Operate, Rule 2004 - Requirements, and Rule 3002 - Requirements, as applicable.

Notwithstanding the above, the provisions of Rules 201, 203, 2004, and 3002 shall not apply to installations or alterations that involve only the equipment listed in Table 1 below, nor shall they apply to the operation of equipment listed in Table 1, when directly associated with permitted process units or other permitted equipment.

Notwithstanding the above, all new equipment listed in Table 1, including associated fugitive components installed with such equipment, shall have Best Available Control Technology installed in conformance with the Best Available Control Technology Guidelines in effect at the time of the installation.

TABLE 1

- (a) Heat Exchanger (including air-cooler, reboiler, cooler, condenser, and shell and tube exchanger)
- (b) In-line Mixer
- (c) Pump
- (d) Knockout Pot - Compressor inlet (immediate inlet) and interstage
- (e) Knockout Pot - Fuel Gas System (downstream of fuel gas mix drums)

This condition applies only to the facility that processes petroleum as defined in the Standard Industrial Classification Manual as Industry No. 2911 - Petroleum Refining, as well as its directly associated sulfur recovery plant which may be located outside of the facility.

[RULE 2004, 5-11-2001; RULE 2004, 4-6-2007]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

F34.1 The operator shall not sell refinery gas containing sulfur compounds in excess of 40 ppmv, calculated as hydrogen sulfide, averaged over 4-hour period.

[RULE 431.1, 6-12-1998]

F52.1 This facility is subject to the applicable requirements of the following rules or regulation(s):

40CFR79

40CFR80

[40CFR 79, 7-1-1999; 40CFR 80, 7-1-1999]

F52.2 This facility is subject to the applicable requirements of the following rules or regulation(s):

40CFR61, Subpart FF

[40CFR 61 Subpart FF, 12-4-2003]

F52.3 This facility is subject to the applicable requirements of the following rules or regulation(s):

40CFR60 Subpart A

40CFR61 Subpart A

40CFR63 Subpart A

[40CFR 60 Subpart A, 6-13-2007; 40CFR 61 Subpart A, 5-16-2007; 40CFR 63 Subpart A, 5-16-2007]

F52.4 This facility is subject to the applicable requirements of the following rules or regulation(s):

Consent Decree Civil No. H-01-0978, 3-21-2001

[CONSENT DECREE, 3-21-2001]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

F60.1 The emission limits identified in Section D and H of the permit shall be defined as emissions discharged to the atmosphere from the originating equipment.

PROCESS CONDITIONS

P13.1 All devices under this process are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
Benzene	40CFR61, SUBPART	FF

[40CFR 61 Subpart FF, 12-4-2003]

[Processes subject to this condition : 1, 2, 3, 4, 5, 6, 8, 9, 11, 12, 15]

SYSTEM CONDITIONS

S1.1 The operator shall limit the loading rate to no more than 1262500 barrel(s) in any one year.

For the purpose of this condition, loading rate shall be defined as the combined loading rate of D790 in Process 14, System 4 and D1040 in Process 14, System 5, and shall be recorded by shipping records.

[RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 14, System 4 , 5]

S2.1 The operator shall limit emissions from this system as follows

CONTAMINANT	EMISSIONS LIMIT
VOC	Less than 2.5 lbs/mmscf of hydrogen produced

[RULE 1189, 1-21-2000]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

[Systems subject to this condition : Process 6, System 1 , 3]

S7.1 The following conditions shall apply to all coke handling and related devices from this system:

The operator shall drive all outgoing petroleum coke trucks, whether filled or empty, through the truck wash system in order to thoroughly wash any residual coke off the exterior of the trucks.

The operator shall clean or wet down the ground area below the conveyors to prevent airborne dust.

The operator shall wash exterior conveyors and return belts, overhead structures and ground area down to the coke laden water return system to avoid accumulation of coke dust.

[**RULE 1158, 6-11-1999**; RULE 1158, 7-11-2008]

[Systems subject to this condition : Process 2, System 8]

S7.2 The following conditions shall apply to all coke handling and related devices from this system:

The operator shall drive all outgoing petroleum coke trucks, whether filled or empty, through the truck wash system in order to thoroughly wash any residual coke off the exterior of the trucks.

The operator shall clean or wet down the ground area below the conveyors to prevent airborne dust.

The operator shall wash exterior conveyors and return belts, overhead structures and ground area down to the coke laden water return system to avoid accumulation of coke dust.

The operator shall drain raw coke from the coker pit before loading to the conveyor hopper to minimize spillage of coke from elevated inclined conveyors.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

[RULE 1158, 6-11-1999; RULE 1158, 7-11-2008]

[Systems subject to this condition : Process 2, System 9]

S11.2 The operator shall comply with all applicable mitigation measures stipulated in the "Statement of Findings, Statement of Overriding Considerations, and Mitigation Monitoring Plan" document which is part of the AQMD Certified Final Environmental Impact Report dated 15-oct-2001 for this facility.

This condition shall only apply to equipment listed in Section H of this facility permit.

[CA PRC CEQA, 11-23-1970]

[Systems subject to this condition : Process 4, System 3 , 7]

S11.3 The operator shall comply with all applicable mitigation measures stipulated in the "Statement of Findings, Statement of Overriding Considerations, and Mitigation Monitoring Plan" document which is part of the AQMD Certified Final Environmental Impact Report dated 04-10-2009 for this facility.

This condition shall only apply to equipment listed in Section H of this facility permit.

[CA PRC CEQA, 11-23-1970]

[Systems subject to this condition : Process 17, System 4]

S13.2 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	QQQ

[40CFR 60 Subpart QQQ, 10-17-2000]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

[Systems subject to this condition : Process 4, System 7; Process 6, System 3; Process 12, System 1 , 2; Process 23, System 1]

S13.3 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
PM	District Rule	1158

[RULE 1158, 6-11-1999; RULE 1158, 7-11-2008]

[Systems subject to this condition : Process 2, System 8 , 9]

S13.4 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1123

[RULE 1123, 12-7-1990]

[Systems subject to this condition : Process 1, System 1 , 2; Process 2, System 1 , 3 , 6 , 7 , 10; Process 3, System 1 , 2 , 4 , 5; Process 4, System 1 , 3 , 5 , 7 , 9; Process 5, System 1 , 3 , 5; Process 6, System 1 , 3; Process 8, System 1; Process 9, System 1 , 2 , 3; Process 12, System 8; Process 19, System 3; Process 21, System 1 , 2 , 3 , 4]

S13.5 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1176

[RULE 1176, 9-13-1996]

[Systems subject to this condition : Process 12, System 1 , 2 , 3 , 4 , 7; Process 19, System 4]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

S13.6 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1149
VOC	District Rule	463

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 463, 5-6-2005]

[Systems subject to this condition : Process 15, System 3]

S13.7 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	463
VOC	District Rule	1178
VOC	District Rule	1149

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Systems subject to this condition : Process 15, System 1 , 2 , 7]

S13.8 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	461

[RULE 461, 6-3-2005; RULE 461, 3-7-2008]

[Systems subject to this condition : Process 19, System 1 , 2]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

S13.9 All devices under this system are subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	463
VOC	District Rule	1178
VOC	District Rule	1149

For Rule 463 applicability, only subdivision (d) in the March 11,1994 amendment, or equivalent requirements in the future amendments, shall apply to domed external floating roof tanks. This does not preclude any requirements specified in Rule 1178

[RULE 1149, 7-14-1995; RULE 1149, 5-2-2008; RULE 1178, 4-7-2006; RULE 463, 5-6-2005]

[Systems subject to this condition : Process 15, System 5]

S15.1 The vent gases from all affected devices of this process/system shall be vented as follows:

All emergency vent gases shall be directed to a blowdown flare system.

This process/system shall not be operated unless the refinery flare system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 15, System 3]

S15.2 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All emergency vent gases shall be directed to the refinery flares (process 21, system 1) or flare gas recovery system (process 21, system 4) which may also include DCU Blowdown Compressor C-137 (device D68) except Devices IDs D898, D20, D910, D1268, D1269, D1280, D93, D94, D96, D1283, D1284, D1288, D1292, D219, D226, D1212, D275, D1256, D375, D928, D1267 & D916 that vent to the atmosphere.

This process/system shall not be operated unless the blowdown flare system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 1, System 1, 2; Process 2, System 1, 3, 6, 10; Process 3, System 1, 2, 5; Process 4, System 1, 3, 5, 7, 9; Process 5, System 1, 3, 5; Process 6, System 1, 3; Process 8, System 1; Process 9, System 1, 2, 3; Process 12, System 8; Process 19, System 3; Process 21, System 4]

S15.3 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to a vapor recovery system (process 21, system 3) consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases or the flare gas recovery system (process 21, system 4).

This process/system shall not be operated unless the vapor recovery system (process 21, system 3) or flare gas recovery system (process 21, system 4) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 1, System 2; Process 2, System 3, 6; Process 3, System 2, 4; Process 4, System 1, 3, 5, 7; Process 5, System 1, 3, 5; Process 6, System 1; Process 8, System 1; Process 9, System 2; Process 21, System 4]

S15.5 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All vent gases under normal operating conditions shall be directed to a vapor recovery system consisting of compressors, D641, 642, 643, and/or 644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases, except devices D305, 432, 1504-1507, 1514-1524 that vent to the flare system.

This process/system shall not be operated unless the vapor recovery system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 9, System 1; Process 23, System 1]

S15.6 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to a vapor recovery system consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases.

This process/system shall not be operated unless the blowdown vapor recovery system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 12, System 7; Process 14, System 4 , 5]

S15.7 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to to the fume scrubber system (P21, S2), and then to the boiler system (P18) with at least one of four boilers (D722-5) in operation.

This process/system shall not be operated unless the above air pollution control system is in full use and has a valid permit to receive vent gases from this system.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 14, System 1; Process 15, System 4]

S15.8 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to the flare system.

This process/system shall not be operated unless the flare(s) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 14, System 3]

S15.9 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to a vapor recovery system (process 21 system 3) consisting of compressors, D641, D642, D643, and/or D644, which can be operated independently to maintain a system vacuum that efficiently collects all vented gases, or the flare gas recovery system (process 21, system 4) except Device D1151 that vents to the atmosphere.

This process/system shall not be operated unless the vapor recovery system(process 21, system3) or flare gas recovery system (process 21, system 4) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 1]

S15.10 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All sour gases under normal operating conditions shall be directed to the amine absorber(s) located in this system.

This process/system shall not be operated unless the absorber(s) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 1; Process 4, System 7; Process 8, System 1]

S15.11 The vent gases from all affected devices of this process/system shall be vented as follows:

All sour gases under normal operating conditions shall be directed to the fuel gas treating system(s) (Process 12, System 8 or Process 4, System 9).

This process/system shall not be operated unless the fuel gas treating system(s) is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 6; Process 21, System 3 , 4]

S15.12 The vent gases from all affected devices of this process/system shall be vented as follows:

All sour gases under normal operating conditions shall be directed to the FCCU gas treating system.

This process/system shall not be operated unless the FCCU gas treating system is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 3, System 1 , 2]

S15.13 The vent gases from all affected devices of this process/system shall be vented as follows:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All sour gases under normal operating conditions shall be directed to the fuel gas treating system (Process 4, System 9) or to the scrubber located in Process 8, System 1.

This process/system shall not be operated unless the fuel gas treating system or the scrubber is in full use and has a valid permit to receive vent gases from this system.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 4, System 1 , 3 , 5]

S15.14 The vent gases from all affected devices of this process/system shall be vented as follows:

All vent gases under normal operating conditions shall be directed to the propane storage tanks or the flare gas recovery system (Process 21, System 4).

All emergency vent gases shall be directed to the flare recovery system (Process 21, System 4).

This process/system shall not be operated unless the flare gas recovery system (Process 21, System 4) is in full use and has a valid permit to receive vent gases from this system

[RULE 1303(a), 12-6-2002; RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Systems subject to this condition : Process 14, System 2]

S18.1 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Crude Distillation Unit (Process: 1, System: 1 & 2)

Delayed Coking Unit (DCU) (Process: 2, System: 1, 3, 6 & 10)

Fluid Catalytic Cracking Unit (FCCU) (Process: 3, System: 1, 2, 4 & 5)

Hydrotreating Units (Process: 4, System: 1, 3, 5, 7 & 9)

Catalytic Reforming Units (Process: 5, System: 1, 3 & 5)

Hydrogen Generation Units (Process: 6, System: 1 & 3)

Hydrocracking Unit (Process: 8, System: 1)

Alkylation Unit (Process: 9, System: 1, 2 & 3)

Treating/Stripping Units (Process: 12, System: 1 & 7)

Loading/Unloading (Process: 14, System: 4 & 5)

Isomerization Unit (Process: 23, System: 1)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 3]

S18.2 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Crude Distillation Unit (Process: 1, System: 1 & 2)

Delayed Coking Unit (DCU) (Process: 2, System: 1, 3, 6 & 10)

Fluid Catalytic Cracking Unit (FCCU) (Process: 3, System: 1, 2, 4 & 5)

Hydrotreating Units (Process: 4, System: 1, 3, 5, 7 & 9)

Catalytic Reforming Units (Process: 5, System: 1, 3 & 5)

Hydrogen Generation Units (Process: 6, System: 1 & 3)

Hydrocracking Unit (Process: 8, System: 1)

Alkylation Unit (Process: 9, System: 1, 2 & 3)

Fuel Gas Treating System (Process: 12, System: 8)

Loading and Unloading (Process: 14, System: 2 & 3)

Pressurized Storage Tanks (Process: 15, System: 3)

Fuel Gas Mix System (Process: 19, System: 3)

Isomerization Unit (Process: 23, System: 1)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 1]

S18.3 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

Inorganic Chemical Loading and Unloading (Process: 14, System: 1)

Miscellaneous Storage Tanks (Process: 15, System: 4)

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 2]

S18.4 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

DCU Blowdown Recovery System (Process: 2, System: 6)

Refinery Vapor Recovery System (Process: 21, System: 3)

Flare Gas Recovery System (Process: 21, System: 4)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 4, System 9; Process 12, System 8]

S18.5 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FCCU Recovery System (Process: 3, System: 1)

FCCU Cracking Section (Process: 3, System: 2)

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 3, System 5]

S18.6 All affected devices listed under this process/system shall be used only to receive, recover and/or dispose of vent gases routed from the system(s) or process(es) listed below, in addition to specific devices identified in the "connected to" column:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Crude Distillation Unit (Process: 1, System: 1 & 2)

Delayed Coking Unit (DCU) (Process: 2, System: 1, 3, 6 & 10)

Fluid Catalytic Cracking Unit (FCCU) (Process: 3, System: 1, 2, 4 & 5)

Hydrotreating Units (Process: 4, System: 1, 3, 5, 7 & 9)

Catalytic Reforming Units (Process: 5, System: 1, 3 & 5)

Hydrogen Generation Units (Process: 6, System: 1 & 3)

Hydrocracking Unit (Process: 8, System: 1)

Alkylation Unit (Process: 9, System: 1, 2 & 3)

Treating/Stripping Units (Process: 12, System: 1 & 7)

Loading/Unloading (Process: 14, System: 4 & 5)

Isomerization Unit (Process: 23, System: 1)

Two-Position propane truck loading (Process: 14, System: 2)

[RULE 1118, 11-4-2005; RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 4]

- S31.1 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 347559, 347560, 347564, 366048, 366083, 376616, 376622, 376623, 376624, 376625, 376627, 376628, 381228, 435139, 457927, 501287 & 501288:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All open-ended valves shall be equipped with cap, blind flange, plug, or a second valve.

All pressure relief valves shall be connected to closed vent system or equipped with rupture disc.

All sampling connections shall be closed-purge, closed-loop, or closed-vent system.

All new valves in VOC service shall be of leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where failures could pose safety hazards (e.g. drain valves with valve stems in horizontal position), retrofits with space limitations, and valves not commercially available.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppm for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the executive officer. This condition does not apply to leakless valves.

The operator shall keep records of the monthly inspection (and quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

The operator shall provide to the District, no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

All new components in VOC service as defined in Rule 1173, except valves and flanges, shall be inspected quarterly using EPA reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

1173 shall be inspected monthly using EPA Method 21.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellow or equivalent as approved in writing by the District prior to installation.

Components shall be defined as any valve, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempt by Rule 1173.

All new components in VOC service, a leak greater than 500 ppm but less than 1,000 ppm measured as methane above background as measured using EPA Method 21, shall be repaired within 14 days of detection.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 2, System 1; Process 3, System 1; Process 4, System 1, 3, 7; Process 5, System 1, 3, 5; Process 6, System 1; Process 8, System 1; Process 9, System 1; Process 15, System 3; Process 23, System 1]

S31.2 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 501291, 494382 & 472872:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All new valves and major components in VOC service as defined by Rule 1173, except those specifically exempted by Rule 1173 and those in heavy liquid service as defined in Rule 1173, shall be distinctly identified from other components through their tag numbers (e.g. numbers ending in the letter "N"), and shall be noted in the records.

All open-ended valves shall be equipped with cap, blind flange, plug, or a second valve.

All pressure relief valves shall be connected to closed vent system or equipped with rupture disc.

All sampling connections shall be closed-purge, closed-loop, or closed-vent system.

All new components in VOC service as defined in Rule 1173, except valves and flanges, shall be inspected quarterly using EPA reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21.

All new components in VOC service, a leak greater than 500 ppm but less than 1,000 ppm measured as methane above background as measured using EPA Method 21, shall be repaired within 14 days of detection.

All new valves in VOC service shall be leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion applications where failures could pose safety hazards (e.g. drain valves with valve stems in horizontal position), retrofits with space limitations, and valves not commercially available.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppm for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the executive officer. This condition does not apply to leakless valves.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

The operator shall keep records of the monthly inspection (and quarterly where applicable), subsequent repair, and re-inspection, in a manner approved by the District.

The operator shall provide to the District no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellow or equivalent as approved in writing by the District prior to installation.

Components shall be defined as any valve, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempt by Rule 1173.

[RULE 1303(a)-BACT, 5-10-1996]

[Systems subject to this condition : Process 21, System 4]

- S31.3 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 470262, 470291, 484368 & 484369:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All open-ended valves shall be equipped with cap, blind flange, plug, or a second valve.

All pressure relief valves shall be connected to closed vent system or equipped with rupture disc.

All sampling connections shall be closed-purge, closed-loop, or closed-vent system.

All new valves in VOC service shall be of leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where failures could pose safety hazards (e.g. drain valves with valve stems in horizontal position), retrofits with space limitations, and valves not commercially available.

If 98.0 percent or greater of the new valve and the new flange population inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppm for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the Executive Officer. This condition does not apply to leakless valves.

The operator shall keep records of the monthly inspection (and quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

All new components in VOC service as defined in Rule 1173, except valves and flanges, shall be inspected quarterly using EPA reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellow or equivalent as approved in writing by the District prior to installation.

Components shall be defined as any valve, fitting, pump, compressor, pressure

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

relief device, diaphragm, hatch, sight-glass, and meter, which are not exempt by Rule 1173.

All new components in VOC service, a leak greater than 500 ppm but less than 1,000 ppm measured as methane above background as measured using EPA Method 21, shall be repaired within 14 days of detection.

[RULE 1303(a)(1)-BACT, 5-10-1996]

[Systems subject to this condition : Process 1, System 4; Process 12, System 7; Process 17, System 4]

- S31.4 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 520770, 551269 & 553835:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All sampling connections shall be closed-purge, closed loop, or closed-vent systems.

All new valves in VOC service shall be leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where valve failure could pose safety hazard (e.g., drain valves with valve stems in horizontal position), retrofits/special applications with space limitations, and valves not commercially available.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellows or equivalent approved in writing by the District prior to installation.

All new components in VOC service as defined by Rule 1173, except valves and flanges shall be inspected quarterly using EPA Reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21. Components shall be defined as any valve, flange, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempted by Rule 1173.

The following leaks shall be repaired within 7 calendar days -- all light liquid/gas/vapor components leaking at a rate of 500 to 10,000 ppm, heavy liquid components leaking at a rate of 100 to 500 ppm and greater than 3 drops/minute, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 2 calendar days -- any leak between 10,000 to 25,000 ppm, any atmospheric PRD leaking at a rate of 200 to 25,000 ppm, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 1 calendar day -- any leak greater than 25,000 ppm, heavy liquid leak greater than 500 ppm, or light liquid leak greater than 3 drops per minute.

If 98.0 percent or greater of the new valve and the new flange population

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppmv for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the Executive Officer. This condition shall not apply to leakless valves.

The operator shall revert from quarterly to monthly inspection program if less than 98.0 percent of the new valves and the new flange population inspected are found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppmv. This condition shall not apply to leakless valves.

The operator shall keep records of the monthly inspection (quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

The operator shall provide to the District, prior to initial startup, a list of all non-leakless type valves that were installed. The list shall include the tag numbers for the valves and reasons why leakless valves were not used. The operator shall not startup the equipment prior to the Districts approval for the use of all non-leakless valves

The operator shall provide to the District, no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets or field inspection surveys for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(b)(2)-Offset, 5-10-1996]

[Systems subject to this condition : Process 2, System 6; Process 9, System 1; Process 14, System 2]

S31.5 The following BACT requirements shall apply to VOC service fugitive components associated with the devices that are covered by application number(s) 526722:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

All sampling connections shall be closed-purge, closed loop, or closed-vent systems.

All new valves in VOC service shall be leakless type, except those specifically exempted by Rule 1173 or approved by the District in the following applications: heavy liquid service, control valves, instrument piping/tubing, applications requiring torsional valve stem motion, applications where valve failure could pose safety hazard (e.g., drain valves with valve stems in horizontal position), retrofits/special applications with space limitations, and valves not commercially available.

For the purpose of this condition, leakless valve shall be defined as any valve equipped with sealed bellows or equivalent approved in writing by the District prior to installation.

All new components in VOC service as defined by Rule 1173, except valves and flanges shall be inspected quarterly using EPA Reference Method 21. All new valves and flanges in VOC service except those specifically exempted by Rule 1173 shall be inspected monthly using EPA Method 21. Components shall be defined as any valve, flange, fitting, pump, compressor, pressure relief device, diaphragm, hatch, sight-glass, and meter, which are not exempted by Rule 1173.

The following leaks shall be repaired within 7 calendar days -- all light liquid/gas/vapor components leaking at a rate of 500 to 10,000 ppm, heavy liquid components leaking at a rate of 100 to 500 ppm and greater than 3 drops/minute, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 2 calendar days -- any leak between 10,000 to 25,000 ppm, any atmospheric PRD leaking at a rate of 200 to 25,000 ppm, unless otherwise extended as allowed under Rule 1173.

The following leaks shall be repaired within 1 calendar day -- any leak greater than 25,000 ppm, heavy liquid leak greater than 500 ppm, or light liquid leak greater than 3 drops per minute.

If 98.0 percent or greater of the new valve and the new flange population

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

inspected is found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppmv for two consecutive months, then the operator may revert to a quarterly inspection program with the approval of the Executive Officer. This condition shall not apply to leakless valves.

All new process drains are subject to District Rule 1176 and 40 CFR Subpart QQQ

The operator shall revert from quarterly to monthly inspection program if less than 98.0 percent of the new valves and the new flange population inspected are found to leak gaseous or liquid volatile organic compounds at a rate less than 500 ppmv. This condition shall not apply to leakless valves.

The operator shall keep records of the monthly inspection (quarterly where applicable), subsequent repair, and reinspection, in a manner approved by the District.

The operator shall provide to the District, prior to initial startup, a list of all non-leakless type valves that were installed. The list shall include the tag numbers for the valves and reasons why leakless valves were not used. The operator shall not startup the equipment prior to the Districts approval for the use of all non-leakless valves

The operator shall provide to the District, no later than 90 days after initial startup, a recalculation of the fugitive emissions based on actual components installed and removed from service. The operator shall also submit a complete, as built, piping and instrumentation diagram(s) and copies of requisition data sheets or field inspection surveys for all non-leakless type valves with a listing of tag numbers and reasons why leakless valves were not used.

[RULE 1303(a)(1)-BACT, 5-10-1996; RULE 1303(a)(1)-BACT, 12-6-2002; RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002]

[Systems subject to this condition : Process 2, System 10]

- S42.1 The operator shall not operate the FCCU unless the operator complies with the emission limits of the following Rule:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Contaminant	Rule	Rule/Subpart
PM10	District Rule	1105.1
NH3	District Rule	1105.1

If the operator fails to comply with any of the terms and conditions listed below, the operator shall be subject to the compliance deadlines as specified in Rule 1105.1(d)(1).

1. Award contract(s) to construct and install the control technology by April 28, 2006.
2. Commence construction phase of the control technology permitted by AQMD for compliance with Rule 1105.1(d)(1) by the later of May 1, 2006 or within 30 days of receiving permit. These dates may be extended in writing by the Executive Officer upon a request by Equilon if the CEQA document is not finalized by April 30, 2006. Such extension(s) shall not be for a period more than five months after the original deadline listed in this paragraph.
3. Start operation of the control technology permitted to ensure compliance with Rule 1105.1 (d)(1) by April 30, 2007.
4. Comply with Rule 1105.1 (d)(1) requirements no later than June 30, 2007.

[RULE 1105.1, 11-7-2003]

[Systems subject to this condition : Process 3, System 6]

DEVICE CONDITIONS

D. Monitoring/Testing Requirements

- D12.4 The operator shall install and maintain a(n) thermocouple or any other equivalent device to accurately indicate the presence of a flame at the pilot light.

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

The operator shall also install and maintain a device to continuously record the parameter being monitored.

[RULE 1118, 11-4-2005; RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; 40CFR 60 Subpart A, 6-13-2007]

[Devices subject to this condition : C747, C748]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

D323.2 The operator shall conduct an inspection for visible emissions from all stacks and other emission points of this equipment whenever there is a public complaint of visible emissions, whenever visible emissions are observed, and on a bi-weekly basis, at least, unless the equipment did not operate during the entire bi-weekly period. The routine bi-weekly inspection shall be conducted while the equipment is in operation and during daylight hours.

If any visible emissions (not including condensed water vapor) are detected that last more than three minutes in any one hour, the operator shall verify and certify within 24 hours that the equipment causing the emission and any associated air pollution control equipment are operating normally according to their design and standard procedures and under the same conditions under which compliance was achieved in the past, and either:

- 1). Take corrective action(s) that eliminates the visible emissions within 24 hours and report the visible emissions as a potential deviation in accordance with the reporting requirements in Section K of this permit; or
- 2). Have a CARB-certified smoke reader determine compliance with the opacity standard, using EPA Method 9 or the procedures in the CARB manual "Visible Emission Evaluation", within three business days and report any deviations to AQMD.

The operator shall keep the records in accordance with the recordkeeping requirements in Section K of this permit and the following records:

- 1). Stack or emission point identification;
- 2). Description of any corrective actions taken to abate visible emissions;
- 3). Date and time visible emission was abated; and
- 4). All visible emission observation records by operator or a certified smoke reader.

[**RULE 3004(a)(4)-Periodic Monitoring, 12-12-1997; RULE 401, 3-2-1984; RULE 401, 11-9-2001**]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

[Devices subject to this condition : C747, C748]

E. Equipment Operation/Construction Requirements

E193.1 The operator shall operate and maintain this equipment according to the following specifications:

The operator shall comply with all applicable requirements specified in Section 60.18 of the 40 CFR60 Subpart A

[40CFR 60 Subpart A, 6-13-2007]

[Devices subject to this condition : C747, C748]

H. Applicable Rules

H23.4 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	40CFR60, SUBPART	GGG

[40CFR 60 Subpart GGG, 6-2-2008]

[Devices subject to this condition : D918, D1082]

H23.5 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1173

[RULE 1173, 5-13-1994; RULE 1173, 2-6-2009]

[Devices subject to this condition : D1419, D1557]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

H23.16 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1173
VOC	40CFR60, SUBPART	GGG

[RULE 1173, 5-13-1994; RULE 1173, 2-6-2009; 40CFR 60 Subpart GGG, 6-2-2008]

[Devices subject to this condition : D1365, D1392]

H23.30 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	465

[RULE 465, 8-13-1999]

[Devices subject to this condition : D1701, D1702, D1703]

H23.38 This equipment is subject to the applicable requirements of the following rules or regulations:

Contaminant	Rule	Rule/Subpart
SOX	District Rule	1118

[RULE 1118, 11-4-2005]

[Devices subject to this condition : C747, C748]

H23.39 This equipment is subject to the applicable requirements of the following rules or regulations:

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION H: PERMIT TO CONSTRUCT AND TEMPORARY PERMIT TO OPERATE

The operator shall comply with the terms and conditions set forth below:

Contaminant	Rule	Rule/Subpart
VOC	District Rule	1173
VOC	40CFR60, SUBPART	GGGa

[RULE 1173, 5-13-1994; RULE 1173, 2-6-2009; 40CFR 60 Subpart GGGa, 6-2-2008]

[Devices subject to this condition : D1557, D1700]

L. Expiration Date

L341.4 Within 90 days after start-up of this equipment, the following device(s) shall be removed from operation:

Vacuum Tower (V-899) identified by Device No. D12

First Stage Ejector/Condenser identified by Device No. D1558

Second Stage Ejector/Condenser identified by Device No. D1559

Third stage Ejector/Condenser identified by Device No. D1560

[RULE 1303(b)(2)-Offset, 5-10-1996; RULE 1303(b)(2)-Offset, 12-6-2002; RULE 1313(d), 12-7-1995]

[Devices subject to this condition : D1700, D1701, D1702, D1703]

FACILITY PERMIT TO OPERATE TESORO REFINING AND MARKETING CO, LLC

SECTION I: PLANS AND SCHEDULES

This section lists all plans approved by AQMD for the purposes of meeting the requirements of applicable AQMD rules specified below. The operator shall comply with all conditions specified in the approval of these plans, with the following exceptions:

- a. The operator does not have to comply with NO_x or SO_x emission limits from rules identified in Table 1 or Table 2 of Rule 2001(j) which become effective after December 31, 1993.
- b. The operator does not have to comply with NO_x or SO_x emission limits from rules identified in Table 1 or Table 2 of Rule 2001(j) after the facility has received final certification of all monitoring and reporting requirements specified in Section F and Section G.

Documents pertaining to the plan applications listed below are available for public review at AQMD Headquarters. Any changes to plan applications will require permit modification in accordance with Title V permit revision procedures.

List of approved plans:

Application	Rule
474117	1123
474150	1118
474575	63SubpartUUU
474581	1105.1
474582	2002
474591	63SubpartUUU
476368	1176
476506	1173
494845	1472
559295	463

NOTE: This section does not list compliance schedules pursuant to the requirements of Regulation XXX - Title V Permits; Rule 3004(a)(10)(C). For equipment subject to a variance, order for abatement, or alternative operating condition granted pursuant to Rule 518.2, equipment specific conditions are added to the equipment in Section D or H of the permit.