



FACILITY PERMIT TO OPERATE

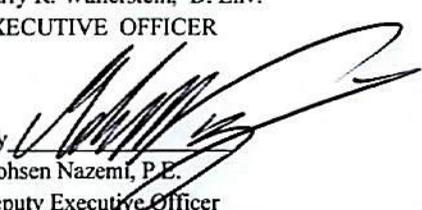
**EXXONMOBIL OIL CORPORATION
3700 W 190TH ST
TORRANCE, CA 90504**

NOTICE

IN ACCORDANCE WITH RULE 206, THIS PERMIT TO OPERATE OR A COPY THEREOF MUST BE KEPT AT THE LOCATION FOR WHICH IT IS ISSUED.

THIS PERMIT DOES NOT AUTHORIZE THE EMISSION OF AIR CONTAMINANTS IN EXCESS OF THOSE ALLOWED BY DIVISION 26 OF THE HEALTH AND SAFETY CODE OF THE STATE OF CALIFORNIA OR THE RULES OF THE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT. THIS PERMIT SHALL NOT BE CONSTRUED AS PERMISSION TO VIOLATE EXISTING LAWS, ORDINANCES, REGULATIONS OR STATUTES OF ANY OTHER FEDERAL, STATE OR LOCAL GOVERNMENTAL AGENCIES.

Barry R. Wallerstein, D. Env.
EXECUTIVE OFFICER

By 
Mohsen Nazemi, P.E.
Deputy Executive Officer
Engineering & Compliance



FACILITY PERMIT TO OPERATE EXXONMOBIL OIL CORPORATION

TABLE OF CONTENTS

Section	Description	Revision #	Date Issued
A	Facility Information	10	12/15/2011
B	RECLAIM Annual Emission Allocation	33	04/01/2013
C	Facility Plot Plan	TO BE DEVELOPED	
D	Facility Description and Equipment Specific Conditions	55	12/17/2013
E	Administrative Conditions	11	01/25/2010
F	RECLAIM Monitoring and Source Testing Requirements	9	01/25/2010
G	Recordkeeping and Reporting Requirements for RECLAIM Sources	10	01/25/2010
H	Permit To Construct and Temporary Permit to Operate	69	12/17/2013
I	Compliance Plans & Schedules	16	01/29/2014
J	Air Toxics	4	01/25/2010
K	Title V Administration	5	01/18/2013
Appendix			
A	NOx and SOx Emitting Equipment Exempt From Written Permit Pursuant to Rule 219	6	01/25/2010
B	Rule Emission Limits	4	01/25/2010



FACILITY PERMIT TO OPERATE EXXONMOBIL OIL CORPORATION

SECTION I: PLANS AND SCHEDULES

This section lists all plans approved by AQMD for the purposes of meeting the requirements of applicable AQMD rules specified below. The operator shall comply with all conditions specified in the approval of these plans, with the following exceptions:

- a. The operator does not have to comply with NOx or SOx emission limits from rules identified in Table 1 or Table 2 of Rule 2001(j) which become effective after December 31, 1993.
- b. The operator does not have to comply with NOx or SOx emission limits from rules identified in Table 1 or Table 2 of Rule 2001(j) after the facility has received final certification of all monitoring and reporting requirements specified in Section F and Section G.

Documents pertaining to the plan applications listed below are available for public review at AQMD Headquarters. Any changes to plan applications will require permit modification in accordance with Title V permit revision procedures.

List of approved plans:

Application	Rule
297437	463
331129	1176
400457	2002
410235	463
421036	1178
423929	1173
448986	63SubpartUUU
458651	1105.1
498730	1173
549899	1105.1
550316	1118

NOTE: This section does not list compliance schedules pursuant to the requirements of Regulation XXX - Title V Permits; Rule 3004(a)(10)(C). For equipment subject to a variance, order for abatement, or alternative operating condition granted pursuant to Rule 518.2, equipment specific conditions are added to the equipment in Section D or H of the permit.



South Coast Air Quality Management District

21865 Copley Drive, Diamond Bar, CA 91765-4178
(909) 396-2000 • www.aqmd.gov

January 29, 2014

Ms. Penny Wirsing
Environmental Section Supervisor
ExxonMobil Oil Corporation
3700 West 190th Street
Torrance, CA 90509

Re: Rule 1118 Flare Monitoring and Recording Plan - Amendment
Application Number: 550316
Plan Owner/Operator: ExxonMobil Oil Corporation, Torrance Refinery
Facility ID: 800089
Facility Address: 3700 West 190th Street, Torrance, CA 90509

Dear Ms. Wirsing:

The South Coast Air Quality Management District (SCAQMD) has reviewed the application submitted by the Torrance Refinery to amend the revised Flare Monitoring and Recording Plan (FMRP) that was reissued on September 11, 2013 under A/N 458580. Based on the information contained in the initial plan application (A/N 458580), this application (A/N 550316) and additional information submitted, the compliance plan, excluding the proposed data substitution, flare event determination and flare pilot monitoring methods, is approved subject to the following conditions. This amended FMRP, as approved, supersedes the plan approved under A/N 458580.

The Torrance Refinery shall comply with all provisions of this approved FMRP unless the plan is suspended, revoked, modified, reissued, or denied, as well as all other applicable requirements of Rule 1118. Violation of any terms of the plan is a violation of Rule 1118.

CONDITIONS

1. The owner/operator shall perform monitoring and recording of the operating parameters for the below flares in accordance with this approved compliance plan and other applicable requirements of Rule 1118(g). The monitoring and recording shall be performed at all times except when the flare monitoring system is out of service for reasons described in Rule 1118(g)(5)(A).

Flare	65F-3	65F-4	65F-8	55F-1
Service Type	General	General	Emergency	Clean

2. For general service flares 65F-3 and 65F-4, a flare event occurs when any one of the following conditions is met:
 - a) The water seal bypass valve PV-65108 is not in the fully closed position ($> 0\%$ open);
 - b) The flare header pressure ratio ($P_{65073} \div LC_{65006}$ or $P_{65073} \div LC_{65007}$) is greater than 40% and the flow velocity of vent gas, as measured by District certified Panametrics flow meter F65128, is equal to or greater than 0.1 feet per second;
 - c) The flare header pressure ratio ($P_{65073} \div LC_{65006}$ or $P_{65073} \div LC_{65007}$) is greater than 70%;
 - d) The water seal level LC65006 or LC65007 is less than 40" of static water pressure.

The flare event ends when the flow velocity drops below 0.12 feet per second and the valve position of PV-65108 is in the fully closed position ($\leq 0\%$ open).

3. The owner/operator shall not proactively open the 65F-3 water seal bypass valve PV-65108 until a flare event has been confirmed by visible flaring and the flare header pressure or vent gas flow parameters in Conditions no. 2 indicate a flaring event is in effect. After a flare event has been determined to be in effect by ExxonMobil's 'Refinery Procedure for Flare Event Confirmation' protocol, the opening and closing of the bypass valve shall be conducted in accordance with ExxonMobil's 'Refinery Procedure for Flare Water Seal By-Pass' protocol.
4. The owner/operator shall measure all vent gases to Flares 65F-3 and 65F-4 by routing them through the Panametrics flow meter via the 42" vent pipe only. The owner/operator shall permanently render out of service all flare headers that are connected downstream of the Panametrics flow meter and leading to general service flares 65F-3 and 65F-4 until these lines are physically segregated from the flare system at the next turnaround. For the purpose of this condition, 'out of service' is defined as no gas flow into the flare header lines at the first connection point from the 42" main flare header line and/or no gas flow at the first connection point from the idle H₂S process unit.
5. For emergency service flare 65F-8, the valve position of main vent gas valve (PV-65042) and combustion stages on/off flow switch valve shall be used to determine when a flare event begins or ends. A flare event occurs when the valve position of PV-65042 OR any of the on/off flow switch valve for the 65F-8 combustion stages is not in the fully closed position ($> 0\%$ open). A flare event ends when PV-65042 AND all of the on/off flow switch valves are fully closed ($\leq 0\%$ open). The owner/operator shall install and maintain a valve position indicator with audible and visual alarms to monitor the opening of PV-65042 and a valve position indicator to continuously monitor and record the position of the on/off flow switch valve for each combustion stage of 65F-8. The audible and visual alarm monitoring system for PV-65042 shall be installed and in full operation by January 31, 2014.

6. For emergency service flare 65F-8, the owner/operator shall use the on/off flow switch of the stage burner valves to determine gas flow rate to the flare. Whenever the on/off flow switch valve of combustion stage for 65F-8 is not in the fully closed position, the vent gas flow rate shall be the maximum design capacity up to that stage. As an example, when the 3rd stage flow switch valve is not in the fully closed position, the flow rate will be the sum of the maximum flow for stages 1, 2 and 3. The vent gas flow shall be assumed to be at the maximum design capacity of the flare when the 4th stage flow switch valve is not in the fully closed position.
7. A flare event lasting 24 hours or less shall be considered a single flare event even when the event occurs in two consecutive days. When a flare event continues for more than 24 hours, each calendar day shall be a separate flare event.
8. The continuous HHV analyzer, total sulfur analyzer and gas flow meter used in this flare plan shall meet or exceed the minimum specifications described in Attachment A of Rule 1118. The flare monitoring system shall also be certified by the SCAQMD. For quality assurance procedures, the owner/operator shall follow the Guidelines for Rule 1118 Flare Monitoring System Quality Assurance and Quality Control Plan published by the SCAQMD.
9. When the maximum range of a flow meter is exceeded, the flow rate shall be assumed to be the maximum design capacity of the flare.
10. Volumetric flow rates of vent gases shall be corrected to standard conditions of 14.7 psia and 68°F and recorded as one-minute averages.
11. Whenever the flow meter, HHV and/or TSC analyzer(s) is down due to breakdowns or maintenance, the owner or operator shall use the data substitution method referenced in Attachment B of Rule 1118 to calculate and report flare emissions except when an alternative data substitution procedure has been approved in writing by the District. Analyzer(s) downtime shall be limited pursuant to Rule 1118(g)(5)(A).
12. For the general and emergency service flares, the owner/operator shall calculate emissions of criteria pollutants from each flare and each flare event using the methods described in Attachment B of Rule 1118.
13. For clean service flare 55F-1, the owner/operator shall calculate emissions of criteria pollutants for each flare event using the following equations and emission factors:

When Combusting Vent Gases from Tanks 400x30 and 400x31		
Air Pollutant	Equation	Emission Factor, EF
ROG	$E = V_c \times EF$	7 lb/mmSCF
NOx	$E = V_c \times EF$	130 lb/mmSCF
CO	$E = V_c \times EF$	35 lb/mmSCF

PM10	$E = V_c \times EF$	7.5 lb/mmSCF
SOx	$E = V_c \times EF$	6.7 lb/mmSCF

When Combusting Vent Gas from Tank 510x4		
Air Pollutant	Equation	Emission Factor, EF
ROG	$E = V_c \times 3500 \times EF$	0.003 lb/mmBTU
NOx	$E = V_c \times 3500 \times EF$	0.13 lb/mmBTU
CO	$E = V_c \times 3500 \times EF$	0.032 lb/mmBTU
PM10	$E = V_c \times 3500 \times EF$	0.0014 lb/mmBTU
SOx	$E = V_c \times 3500 \times EF$	0.00193 lb/mmBTU

Vent gas flow, V_c shall be calculated using the following pressure control valve equation whenever the valve position detector indicates the valve is not in the fully closed position:

$$SCFH = Cg2 * [528/SG * (T+460)]^{1/2} * P1 * SIN[(180/\pi * 59.64/C1) * ((P1-P2)/P1)^{1/2}]$$

Where:

- $Cg2$ = Gas sizing coefficient for valve opening as a function of linear percent open
- SG = Specific gravity
- T = Temperature
- $P1$ = Tank pressure, psia
- $P2$ = Downstream pressure prior to flaring, psia
- $C1$ = Valve constant

14. The owner/operator shall install and maintain a flow meter to monitor and record the pilot and all purge gas flows to the general and emergency service flares; 65F-3, 65F-4 and 65F-8.
15. For clean service flare 55F-1 only, the pilot gas flow shall equal to the maximum design capacity of 1057 SCFH.
16. The owner/operator shall install and maintain thermocouples to monitor the presence of a pilot flame on elevated flares 65F-3, 65F-4 and 55F-1 during the next turnaround for each flare. If flares 65F-3 and 55F-1 are not equipped with thermocouples that are fully operational by the end of year 2015 and flare 65F-4 is not equipped with thermocouples that are fully operational by the end of year 2016, the owner/operator shall submit a written request for an extension to the District for approval. Until the thermocouples are installed, infrared sensors shall be used to monitor the presence of a flame at the flare tips. The operator shall verify the presence of a flame and reignite the pilot if necessary immediately after an alarm of a flame out is sounded.

17. The owner/operator shall monitor the 65F-8 flare at all times for presence of a pilot flame using thermocouples that will alarm the operator in the event of a pilot flame out. The operator shall reignite the pilot after a pilot flame out occurs.
18. The owner/operator shall notify the Executive Officer within one hour of any unplanned flare event with emissions exceeding either 100 pounds of VOC or 500 pounds of sulfur dioxide, or exceeding 500,000 standard cubic feet of flared vent gas. The owner/operator shall also notify the Executive Officer by telephone at least 24 hours prior to the start of a planned flare event with emissions exceeding either 100 pounds of VOC or 500 pounds of sulfur dioxide, or 500,000 standard cubic feet of combusted vent gas.
19. The owner/operator shall conduct a Specific Cause Analysis for any flare event, excluding planned shutdown, planned startup and turnaround, resulting in any of the followings: (a) 100 pounds of VOC emissions. (b) 500 pounds of sulfur dioxide emissions. (c) 500,000 standard cubic feet of vent gas combusted. The analysis shall identify the cause and duration of the flare event and describe any mitigation and corrective action taken to prevent recurrence of a similar flare event in the future. Unless an extension is granted, the owner/operator shall submit Specific Cause Analysis to the Executive Officer within 30 days of the event.
20. The owner/operator shall conduct an analysis and determine the relative cause of a flare event that results in combustion of more than 5,000 standard cubic feet of vent gas. A Specific Cause Analysis may be submitted to satisfy this condition.
21. The owner/operator shall submit a complete Flare Minimization Plan for approval by the Executive Officer no later than 90 days from the end of a calendar year in which flare emissions exceeding the annual performance targets set by Rule 1118(d)(1). The plan shall comply with the requirements of Rule 1118(e).
22. The owner or operator shall maintain records in a manner approved by the Executive Officer for the following:
 - a. Flare event data collected pursuant to paragraph (g)(3), (g)(4), (g)(5), (g)(6) and subparagraph (g)(8)(C) of Rule 1118 as applicable.
 - b. Total daily and quarterly emissions of criteria pollutant from each flare and each flare event along with all information specified by R1118(i)(5)(B).
 - c. Pilot flame failure report.
 - d. Planned and unplanned flare monitoring system downtime reports that include date and time and explanation for taking the system out of service.
 - e. Information to substantiate any exemptions taken under Rule 1118(k).
 - f. Monitoring records of valve position indicator(s) pursuant to Conditions No. 2, 3, 5 and 6.
 - g. Specific Cause Analysis completed pursuant to Condition No. 19.
 - h. Relative Cause Analysis completed pursuant to Condition No. 20.
 - i. Annual acoustical pressure relief device leak survey conducted pursuant to Rule 1118(c)(1)(C).

- j. Annual sulfur dioxide emissions for all flares at the refinery normalized over the crude oil processing capacity in calendar year 2004.
- k. Video records pursuant to Rule 1118(g)(7).

Within 30 days after the end of each calendar quarter, the owner or operator shall submit a quarterly report to the SCAQMD Refinery Compliance Team to the address below. Items (a) through (h) shall be submitted quarterly in electric format. Hard copy of item (i) shall be submitted with the quarterly report for the quarter which the survey was conducted. Hard copy of item (j) shall be submitted with the last quarterly report for the year. Item (k) shall be made available to the Executive Officer upon request.

All records required by this condition shall be certified for accuracy in writing by the responsible facility official and maintained for at least five years.

SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT
REFINERY COMPLIANCE
1500 WEST CARSON STREET, SUITE 115
LONG BEACH, CA 90810

Please review the plan carefully and discard the earlier approved version. If you have any questions, please contact Mr. Thomas Lee at (909) 396-3138 or tleel@aqmd.gov.

Sincerely,



Mohsen Nazemi, P.E.
Deputy Executive Officer
Engineering and Compliance Office

cc: Ed Pupka
A/N 458580 file