



AUG 20 2010

Richard Garcia
Vintage Production California, LLC
10800 Stockdale Highway
Bakersfield, CA 93311

Re: Notice of Minor Title V Permit Modification
District Facility # S-1738
Project # S-1101358


Dear Mr. Garcia:

Enclosed is the District's analysis of your application for minor Title V permit modification for the facility identified above. You proposed a Title V minor permit modification to incorporate recently issued S-1738-251-8, '-412-0, and '-413-0 into the Title V operating permit. The modification is to add storage tanks S-1738-412-1 and '-413-1, and connect the storage tanks to the vapor control system on permit unit '-251-10.

Enclosed is the engineering evaluation with the following attachments: proposed modified Title V permit, recently issued S-1738-251-8, '-412-0, and '-413-0, emission increases, application, and previous Title V permit. This project will be subject to a 45-day EPA commenting period prior to the District taking final action.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Jim Swaney at (559) 230-5900.

Sincerely,

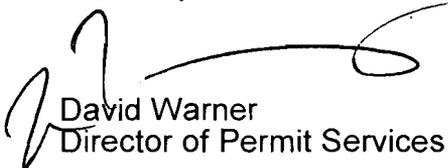

David Warner
Director of Permit Services

Enclosures

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



AUG 20 2010

Gerardo C. Rios, Chief
Permits Office
Air Division
U.S. EPA - Region IX
75 Hawthorne St
San Francisco, CA 94105

Re: **Notice of Minor Title V Permit Modification**
District Facility # S-1738
Project # S-1101358


Dear Mr. Rios:

Enclosed for you to review is an application for minor Title V permit modification for the facility identified above. Vintage Production California, LLC is proposing a Title V minor permit modification to incorporate the recently issued S-1738-251-8, '-412-0, and '-413-0 into the Title V operating permit. The modification is to add storage tanks S-1738-412-1 and '-413-1, and connect the storage tanks to the vapor control system on permit unit '-251-10.

Enclosed is the engineering evaluation with the following attachments: proposed modified Title V permit, recently issued S-1738-251-8, '-412-0, and '-413-0, emission increases, application, and previous Title V permit. Please submit your written comments on this project within the 45-day comment period that begins on the date you receive this letter.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Jim Swaney at (559) 230-5900.

Sincerely,

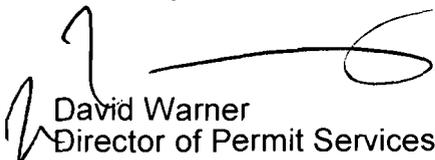

David Warner
Director of Permit Services

Enclosures

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585

TITLE V APPLICATION REVIEW

Minor Modification

Project #: S-1101358

Engineer: Tim Bush

Date: August 16, 2010

Facility Number: S-1738
Facility Name: Vintage Production California LLC
Mailing Address: 10800 Stockdale Highway
Bakersfield, CA 93311

Contact Name: Richard Garcia
Phone: (661) 412-5216

Responsible Official: Armando Gongalez
Title: Manager, Health, Environment, Safety and Security

I. PROPOSAL

Vintage Production California, LLC is proposing a Title V minor permit modification to incorporate the recently issued S-1738-251-8, '-412-0, and '-413-0 into the Title V operating permit. The modification is to add storage tanks '-412-1 and '-413-1, and allow the storage tanks to connect to the vapor control system on permit unit '-251-10.

The purpose of this evaluation is to identify all applicable requirements, determine if the facility will comply with the applicable requirements and to provide the legal and factual basis for the proposed revisions.

II. FACILITY LOCATION

Light Oil Western Stationary Source Western Kern County Kern County, CA
SW Section 20 Township 31S Range 23E

III. EQUIPMENT DESCRIPTION

S-1738-251-10: 84,588 GALLON FIXED ROOF PETROLEUM STORAGE TANK WITH VAPOR RECOVERY SYSTEM CONNECTED WITH PERMITS S-1738-336, -337, AND -343, INCLUDING TWO COMPRESSORS SERVING

PERMIT UNITS S-1738-252 THROUGH '-254, '-412, '-413 (555 STEVENS ZONE UNIT)

S-1738-412-1: 420,000 GALLON (10,000 BBL) FIXED ROOF PETROLEUM PRODUCTION TANK WITH PIPING TO VAPOR RECOVERY SYSTEM UNDER PERMIT S-1738-251 (555 STEVENS ZONE UNIT)

S-1738-413-1: 21,000 GALLON (500 BBL) FIXED ROOF PETROLEUM PRODUCTION TANK WITH PIPING TO VAPOR RECOVERY SYSTEM UNDER PERMIT S-1738-251 (555 STEVENS ZONE UNIT)

IV. SCOPE OF EPA AND PUBLIC REVIEW

This change to a Title V permit is considered to be a minor modification and, as such, requires no public review.

V. APPLICABLE REQUIREMENTS

District Rule 2520, Federally Mandated Operating Permits (Adopted June 21, 2001)

VI. DESCRIPTION OF PROPOSED MODIFICATIONS

Vintage Production California, LLC is proposing to install two fixed roof petroleum tanks with vapor recovery. The tanks will connect to the vapor control system on permit unit S-1738-251.

S-1738-251-10:

The equipment description on the proposed permit was updated to include units S-1738-412 and '-413 as units connected to vapor control system.

S-1738-412-1 and '-413-1:

Permit conditions 1 through 3 on the proposed Permit to Operate were included to ensure compliance with the control requirements of Table 2 of District Rule 4623.

Permit condition 4 was included on the proposed Permit to Operate to meet the monitoring requirements of District Rule 2520.

Permit conditions 5 and 6 were added to the proposed Permit to Operate to specify a leak-free condition as required in District Rule 4623.

Permit condition 7 was included on the proposed draft Permit to Operate to list the tank gauging and sampling requirements of District Rule 4623.

Permit conditions 8, 9, 10, and 11 is included on the proposed Permit to Operate to insure the unit meets the daily emissions limit.

Permit conditions 12, 13, 14, 15, 16, and 17 were included on the proposed Permit to Operate to insure compliance with the voluntary inspection and maintenance program outlined in District Rule 4623.

Permit conditions 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, and 28 were included on the proposed Permit to Operate to insure compliance with tank-cleaning provisions outlined in District Rule 4623.

Permit condition 29 on the current Permit to Operate was included on the proposed Permit to Operate for compliance with the record retention requirements of District Rule 4623.

VII. COMPLIANCE

In accordance with Rule 2520, 3.20, these modifications:

1. Do not violate requirements of any applicable federally enforceable local or federal requirement;
2. Do not relax monitoring, reporting, or recordkeeping requirements in the permit and are not significant changes in existing monitoring permit terms or conditions;
3. Do not require or change a case-by-case determination of an emission limitation or other standard, or a source-specific determination for temporary sources of ambient impacts, or a visibility or increment analysis;
4. Do not seek to establish or change a permit term or condition for which there is no corresponding underlying applicable requirement and that the source has assumed to avoid an applicable requirement to which the source would otherwise be subject. Such terms and conditions include:
 - a. A federally enforceable emission cap assumed to avoid classification as a modification under any provisions of Title I of the Federal Clean Air Act; and
 - b. An alternative emissions limit approved pursuant to regulations promulgated under section 112(i)(5) of the Federal Clean Air Act; and

5. Are not Title I modifications as defined in District Rule 2520 or modifications as defined in section 111 or 112 of the Federal Clean Air Act; and
6. Do not seek to consolidate overlapping applicable requirements.

In accordance with Rule 2520, the application meets the procedural requirements of section 11.4 by including;

1. A description of the change, the emissions resulting from the change, and any new applicable requirements that will apply if the change occurs;
2. The source's suggested draft permit; and
3. Certification by a responsible official that the proposed modification meets the criteria for use of minor permit modification procedures and a request that such procedures be used.

VIII. ATTACHMENTS

- A. Proposed Modified Title V Operating Permit No. S-1738-251-10, -512-1, -513-1
- B. Authorities to Construct No. S-1738-251-8, -412-0, -413-0
- C. Emissions Increases
- D. Application
- E. Previous Title V Operating Permit No. S-1738-251-9

ATTACHMENT A

Proposed Modified Title V Operating Permit No.
(S-1738-251-10, -412-1, -413-1)

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-1738-251-10

EXPIRATION DATE: 02/28/2014

SECTION: SW20 TOWNSHIP: 31S RANGE: 23E

EQUIPMENT DESCRIPTION:

84,588 GALLON FIXED ROOF PETROLEUM STORAGE TANK WITH VAPOR RECOVERY SYSTEM CONNECTED WITH PERMITS S-1738-336, -337, AND -343, INCLUDING TWO COMPRESSORS SERVING PERMIT UNITS S-1738-252 THROUGH '-254, '-412, '-413 (555 STEVENS ZONE UNIT)

PERMIT UNIT REQUIREMENTS

1. The tank shall be equipped with a vapor recovery system consisting of a closed vent system that collects all VOCs from the storage tank, and a VOC control device. The vapor recovery system shall be APCO-approved and maintained in leak-free condition. The VOC control device shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method specified in Section 6.4.6. [District Rule 4623] Federally Enforceable Through Title V Permit
2. All piping valves and fittings shall be constructed and maintained in a leak-free condition. [District Rule 4623, 5.6.3] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak or a liquid leak. A gas leak is defined as a reading in excess of 10,000 ppmv, above background, as measured by a portable hydrocarbon detection instrument in accordance with the procedures specified in EPA Test Method 21. A liquid leak is defined as the dripping of organic liquid at a rate of more than 3 drops per minute. A reading in excess of 10,000 ppmv above background or the dripping of organic liquid at a rate of more than 3 drops per minute is a violation of this permit and Rule 4623 and shall be reported as a deviation. [District Rule 4623, 3.11, 3.17, 3.18, and 6.4.8] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. {2606} The operator shall ensure that the vapor recovery system is functional and is operating as designed at all times. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
6. {2591} The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
7. Compliance with permit conditions in the Title V permit shall be deemed compliance with District Rule 4623 (Amended May 19, 2005). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
8. {2608} This unit has a storage capacity less than 420,000 gallons and is used for petroleum or condensate stored, processed and/or treated at a drilling and production facility prior to custody transfer. Therefore, the requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
9. Tank shall not be used to store or process liquids if the vapor control system is inoperable. [District NSR Rule] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

10. Vapor recovery system shall vent to gas plant (permit S-39-1) only. [District NSR Rule] Federally Enforceable Through Title V Permit
11. Operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
12. Upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
13. Upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
14. Components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
15. Leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
16. If a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
17. Any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
18. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
19. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25A provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. Analysis of halogenated exempt compounds shall be analyzed by ARB Method 422 "Exempt Halogenated VOCs in Gases September 12, 1990." [District Rule 4623, 6.4.6 and 6.4.7] Federally Enforceable Through Title V Permit
20. Operator shall monitor vapor recovery compressor activation and shut off manometer pressures on quarterly basis to ensure that compressor activation pressure does not exceed pressure relief valve setting. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

21. Operator shall inspect pressure relief valve for fugitive leaks annually in accordance with EPA Method 21, with the instrument calibrated with methane. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

DRAFT

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-1738-412-1

EXPIRATION DATE: 02/28/2014

EQUIPMENT DESCRIPTION:

420,000 GALLON (10,000 BBL) FIXED ROOF PETROLEUM PRODUCTION TANK WITH PIPING TO VAPOR RECOVERY SYSTEM UNDER PERMIT S-1738-251 (555 STEVENS ZONE UNIT)

PERMIT UNIT REQUIREMENTS

1. Tank shall be connected to the VOC vapor control system listed on S-1738-251. VOC vapors from tank shall vent only to the vapor control system. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
2. Storage tank pressure-vacuum cap(s) shall be set to relieve pressure at a pressure level higher than that required to actuate compressor. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
3. Storage tank pressure-vacuum cap(s) shall be leak-free (except for inbreathing) during normal operation. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
4. Operator shall inspect pressure relief valve for fugitive leaks annually in accordance with EPA Method 21, with the instrument calibrated with methane. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
5. All piping, valves, and fittings shall be constructed and maintained in a leak-free condition. [District NSR and District Rule 4623, 5.6.3] Federally Enforceable Through Title V Permit
6. This tank shall be in a leak-free condition. A leak-free condition is defined as a condition without a gas leak or a liquid leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with the procedures specified in EPA Test Method 21. A reading in excess of 10,000 ppmv above background is a violation of this permit. A liquid leak is defined as the dripping of organic liquid at a rate of more than 3 drops per minute. [District NSR Rule and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
7. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District NSR and District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
8. VOC fugitive emissions from the components in both gas and liquid service on this tank shall not exceed 0.2 lb-VOC/day [District NSR Rule] Federally Enforceable Through Title V Permit
9. Permittee shall maintain accurate component count for tank according to CAPCOA's "California Implementation Guidelines for Estimating Mass Emissions of Fugitive Hydrocarbon Leaks at Petroleum Facilities," Table IV-2c (Feb 1999), Screening Value Range emission factors < 10,000 ppmv. Permittee shall update such records when new components are approved and installed [District NSR Rule] Federally Enforceable Through Title V Permit
10. Except as otherwise provided in this permit, the operator shall ensure that the VOC vapor control system is functional and is operating as designed at all times. [District NSR Rule] Federally Enforceable Through Title V Permit
11. Any component found to be leaking is in violation of the District's NSR Rule, even if it is under the voluntary inspection and maintenance program. [District NSR Rule] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

12. Operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
13. Upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
14. Upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
15. Components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
16. If a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
17. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rule 2520, 9.4.1] Federally Enforceable Through Title V Permit
18. Permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. This tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. During tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

21. To facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. This tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. While performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. Steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. During sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. Permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. Permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rules 2020 and 4623, 5.7] Federally Enforceable Through Title V Permit
29. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rules 2520, 9.4.2 and 4623, 6.3] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-1738-413-1

EXPIRATION DATE: 02/28/2014

EQUIPMENT DESCRIPTION:

21,000 GALLON (500 BBL) FIXED ROOF PETROLEUM PRODUCTION TANK WITH PIPING TO VAPOR RECOVERY SYSTEM UNDER PERMIT S-1738-251 (555 STEVENS ZONE UNIT)

PERMIT UNIT REQUIREMENTS

1. Tank shall be connected to the VOC vapor control system listed on S-1738-251. VOC vapors from tank shall vent only to the vapor control system. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
2. Storage tank pressure-vacuum cap(s) shall be set to relieve pressure at a pressure level higher than that required to actuate compressor. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
3. Storage tank pressure-vacuum cap(s) shall be leak-free (except for inbreathing) during normal operation. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
4. Operator shall inspect pressure relief valve for fugitive leaks annually in accordance with EPA Method 21, with the instrument calibrated with methane. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
5. All piping, valves, and fittings shall be constructed and maintained in a leak-free condition. [District NSR and District Rule 4623, 5.6.3] Federally Enforceable Through Title V Permit
6. This tank shall be in a leak-free condition. A leak-free condition is defined as a condition without a gas leak or a liquid leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with the procedures specified in EPA Test Method 21. A reading in excess of 10,000 ppmv above background is a violation of this permit. A liquid leak is defined as the dripping of organic liquid at a rate of more than 3 drops per minute. [District NSR Rule and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
7. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District NSR and District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
8. VOC fugitive emissions from the components in both gas and liquid service on this tank shall not exceed 0.2 lb-VOC/day [District NSR Rule] Federally Enforceable Through Title V Permit
9. Permittee shall maintain accurate component count for tank according to CAPCOA's "California Implementation Guidelines for Estimating Mass Emissions of Fugitive Hydrocarbon Leaks at Petroleum Facilities," Table IV-2c (Feb 1999), Screening Value Range emission factors < 10,000 ppmv. Permittee shall update such records when new components are approved and installed [District NSR Rule] Federally Enforceable Through Title V Permit
10. Except as otherwise provided in this permit, the operator shall ensure that the VOC vapor control system is functional and is operating as designed at all times. [District NSR Rule] Federally Enforceable Through Title V Permit
11. Any component found to be leaking is in violation of the District's NSR Rule, even if it is under the voluntary inspection and maintenance program. [District NSR Rule] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

Facility Name: VINTAGE PRODUCTION CALIFORNIA LLC

Location: LIGHT OIL WESTERN STATIONARY SOURCE, WESTERN KERN COUNTY, KERN COUNTY, CA

S-1738-413-1: Aug 17 2010 2:59PM -- BUSHT

12. Operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
13. Upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
14. Upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
15. Components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
16. If a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
17. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rule 2520, 9.4.1] Federally Enforceable Through Title V Permit
18. Permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
19. This tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. During tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit

DRAFT
PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

21. To facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. This tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. While performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. Steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. During sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. Permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. Permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rules 2020 and 4623, 5.7] Federally Enforceable Through Title V Permit
29. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rules 2520, 9.4.2 and 4623, 6.3] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

ATTACHMENT B

Authorities to Construct No.
(S-1738-251-8, -412-0, -413-0)



San Joaquin Valley
Air Pollution Control District

AUTHORITY TO CONSTRUCT

PERMIT NO: S-1738-251-8

ISSUANCE DATE: 08/08/2008

LEGAL OWNER OR OPERATOR: VINTAGE PRODUCTION CALIFORNIA LLC
MAILING ADDRESS: 9600 MING AVENUE, SUITE 300
BAKERSFIELD, CA 93311

LOCATION: LIGHT OIL WESTERN STATIONARY SOURCE
WESTERN KERN COUNTY
KERN COUNTY, CA

SECTION: SW20 TOWNSHIP: 31S RANGE: 23E

EQUIPMENT DESCRIPTION:

MODIFICATION OF 84,588 GALLON FIXED ROOF PETROLEUM STORAGE TANK WITH VAPOR RECOVERY SYSTEM CONNECTED WITH PERMITS S-1738-336, -337, AND -343, INCLUDING TWO COMPRESSORS SERVING PERMIT UNITS S-1738-252 THROUGH -254 (555 STEVENS ZONE UNIT); CONNECT TANKS S-1738-412-0, S-1738-413-0 AND PRESSURE VESSEL TO THE VAPOR CONTROL SYSTEM (REVISED 2/24/2009 BY SPL)


CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. The tank shall be equipped with a vapor recovery system consisting of a closed vent system that collects all VOCs from the storage tank, and a VOC control device. The vapor recovery system shall be APCO-approved and maintained in gas-tight condition. The VOC control device shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method specified in Section 6.4.7. [District Rule 4623] Federally Enforceable Through Title V Permit
3. All piping valves and fittings shall be constructed and maintained in a gas tight condition [District Rule 4623, 5.6.3] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Yed Sadredin, Executive Director / APCO


DAVID WARNER, Director of Permit Services

S-1738-251-8 Feb 24 2009 4:20PM - LECHARD'S Joint Inspection NOT Required

Southern Regional Office • 34946 Flyover Court • Bakersfield, CA 93308 • (661) 392-5500 • Fax (661) 392-5585

4. A gas-tight condition is defined as a condition without a gas leak. A gas leak is defined as a reading in excess of 10,000 ppmv, above background, as measured by a portable hydrocarbon detection instrument in accordance with the procedures specified in EPA Test Method 21. A reading in excess of 10,000 ppmv above background is a violation of this permit and Rule 4623 and shall be reported as a deviation. [District Rule 4623, 3.9 and 6.4.8] Federally Enforceable Through Title V Permit
5. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a gas-tight cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
6. The operator shall ensure that the vapor recovery system is functional and is operating as designed at all times. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
7. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
8. Compliance with permit conditions in the Title V permit shall be deemed compliance with District Rule 4623 (Amended December 20, 2001). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
9. This unit has a storage capacity less than 420,000 gallons and is used for petroleum or condensate stored, processed and/or treated at a drilling and production facility prior to custody transfer. Therefore, the requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
10. Tank shall not be used to store or process liquids if the vapor control system is inoperable. [District NSR Rule] Federally Enforceable Through Title V Permit
11. Vapor recovery system shall vent to gas sales line only. [District NSR Rule] Federally Enforceable Through Title V Permit
12. All piping, fittings, and valves on this tank shall be inspected annually by the facility operator in accordance with EPA Method 21, with the instrument calibrated with methane, to ensure compliance with the leaking provisions of this permit. [District Rule 4623, 5.7 (Table 3)] Federally Enforceable Through Title V Permit
13. If any of the tank components are found to be leaking, operator shall immediately affix a tag and maintain records of gas leak detection readings, date/time leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, 5.7 (Table 3)] Federally Enforceable Through Title V Permit
14. Upon detection of any leaking components (having a gas leak >10,000 ppmv, measured in accordance with EPA Method 21 by a portable hydrocarbon detection instrument that is calibrated with methane) operator shall: (a) Eliminate or minimize the leak within 8 hours after detection. (b) If the leak can not be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices; and eliminate the leak within 48 hours after detection. (c) In no event that the total time to minimize and eliminate the leak shall exceed 56 hours after detection. [District Rule 4623, 5.7 (Table 3)] Federally Enforceable Through Title V Permit
15. Leaking tank components affixed to the tank or within five feet of the tank that have been discovered by the operator and that have been immediately tagged and repaired within the specified deadlines, shall not constitute a violation of the District Rule 4623. However, leaking components discovered during inspections by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within specified deadlines, shall constitute a violation of the District Rule 4623. [District Rule 4623, 5.7 (Table 3)] Federally Enforceable Through Title V Permit
16. If a component type for a given tank is found to leak during an annual inspection, then conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If a component type is found to have no leak after four consecutive quarterly inspections, then revert to annual inspections. [District Rule 4623, 5.7 (Table 3)] Federally Enforceable Through Title V Permit
17. Any component found to be leaking on two consecutive annual inspections is in violation of the District Rule 4623, even if it is under the voluntary inspection and maintenance program. [District Rule 4623, 5.7 (Table 3)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

18. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
19. Control efficiency shall be determined by a comparison of controlled emissions to those emissions which would occur from a fixed or cone roof tank in the same product service without a vapor recovery system. Emissions shall be determined based on tank emission factors in EPA Publication AP-42, component counts for fugitive emissions sources, recognized emission factors for fugitive emission sources and the efficiency of any VOC destruction device. [District Rule 4623, 6.4.6] Federally Enforceable Through Title V Permit
20. The efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by 40 CFR 60, Appendix A, Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used, and analysis of halogenated exempt compounds shall be analyzed by EPA Method 18 or ARB Method 422. [District Rule 4623, 6.4.7] Federally Enforceable Through Title V Permit
21. Operator shall monitor vapor recovery compressor activation and shut off manometer pressures on quarterly basis to ensure that compressor activation pressure does not exceed pressure relief valve setting. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
22. Operator shall inspect pressure relief valve for fugitive leaks annually in accordance with EPA Method 21, with the instrument calibrated with methane. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit



San Joaquin Valley
AIR POLLUTION CONTROL DISTRICT

AUTHORITY TO CONSTRUCT

PERMIT NO: S-1738-412-0

ISSUANCE DATE: 08/08/2008

LEGAL OWNER OR OPERATOR: VINTAGE PRODUCTION CALIFORNIA LLC
MAILING ADDRESS: 9600 MING AVENUE, SUITE 300
BAKERSFIELD, CA 93311

LOCATION: LIGHT OIL WESTERN STATIONARY SOURCE
WESTERN KERN COUNTY
KERN COUNTY, CA

EQUIPMENT DESCRIPTION:

420,000 GALLON (10,000 BBL) FIXED ROOF PETROLEUM PRODUCTION TANK WITH PIPING TO VAPOR RECOVERY SYSTEM UNDER PERMIT S-1738-251 (555 STEVENS ZONE UNIT)

CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. Tank shall be connected to the VOC vapor control system listed on S-1738-251. VOC vapors from tank shall vent only to the vapor control system. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
3. Storage tank pressure-vacuum cap(s) shall be set to relieve pressure at a pressure level higher than that required to actuate compressor. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
4. Storage tank pressure-vacuum cap(s) shall be leak-free (except for inbreathing) during normal operation. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
5. Operator shall inspect pressure relief valve for fugitive leaks annually in accordance with EPA Method 21, with the instrument calibrated with methane. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
6. All piping, valves, and fittings shall be constructed and maintained in a leak-free condition. [District NSR and District Rule 4623, 5.6.3] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 326-6900 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO

DAVID WARNER, Director of Permit Services

S-1738-412-0 Aug 8 2008 12:43PM - BUSHKT Joint Inspection NOT Required

Southern Regional Office • 2700 M Street, Suite 275 • Bakersfield, CA 93301-2370 • (661) 326-6900 • Fax (661) 326-6985

Printed on recycled paper

7. This tank shall be in a leak-free condition. A leak-free condition is defined as a condition without a gas leak or a liquid leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with the procedures specified in EPA Test Method 21. A reading in excess of 10,000 ppmv above background is a violation of this permit. A liquid leak is defined as the dripping of organic liquid at a rate of more than 3 drops per minute. [District NSR Rule and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
8. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District NSR and District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
9. VOC fugitive emissions from the components in both gas and liquid service on this tank shall not exceed 0.2 lb-VOC/day [District NSR Rule] Federally Enforceable Through Title V Permit
10. Permittee shall maintain accurate component count for tank according to CAPCOA's "California Implementation Guidelines for Estimating Mass Emissions of Fugitive Hydrocarbon Leaks at Petroleum Facilities," Table IV-2c (Feb 1999), Screening Value Range emission factors < 10,000 ppmv. Permittee shall update such records when new components are approved and installed [District NSR Rule] Federally Enforceable Through Title V Permit
11. Except as otherwise provided in this permit, the operator shall ensure that the VOC vapor control system is functional and is operating as designed at all times. [District NSR Rule] Federally Enforceable Through Title V Permit
12. Any component found to be leaking is in violation of the District's NSR Rule, even if it is under the voluntary inspection and maintenance program. [District NSR Rule] Federally Enforceable Through Title V Permit
13. Operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
14. Upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
15. Upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
16. Components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
17. If a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
18. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rule 2520, 9.4.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

19. Permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. This tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. During tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. To facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. This tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. While performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. Steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. During sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. Permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
29. Permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rules 2020 and 4623, 5.7] Federally Enforceable Through Title V Permit
30. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rules 2520, 9.4.2 and 4623, 6.3] Federally Enforceable Through Title V Permit



AUTHORITY TO CONSTRUCT

PERMIT NO: S-1738-413-0

ISSUANCE DATE: 08/08/2008

LEGAL OWNER OR OPERATOR: VINTAGE PRODUCTION CALIFORNIA LLC
MAILING ADDRESS: 9600 MING AVENUE, SUITE 300
BAKERSFIELD, CA 93311

LOCATION: LIGHT OIL WESTERN STATIONARY SOURCE
WESTERN KERN COUNTY
KERN COUNTY, CA

EQUIPMENT DESCRIPTION:
21,000 GALLON (500 BBL) FIXED ROOF PETROLEUM PRODUCTION TANK WITH PIPING TO VAPOR RECOVERY SYSTEM UNDER PERMIT S-1738-251 (555 STEVENS ZONE UNIT)


CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. Tank shall be connected to the VOC vapor control system listed on S-1738-251. VOC vapors from tank shall vent only to the vapor control system. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
3. Storage tank pressure-vacuum cap(s) shall be set to relieve pressure at a pressure level higher than that required to actuate compressor. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
4. Storage tank pressure-vacuum cap(s) shall be leak-free (except for inbreathing) during normal operation. [District NSR and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
5. Operator shall inspect pressure relief valve for fugitive leaks annually in accordance with EPA Method 21, with the instrument calibrated with methane. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
6. All piping, valves, and fittings shall be constructed and maintained in a leak-free condition. [District NSR and District Rule 4623, 5.6.3] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 326-6900 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT. This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO


DAVID WARNER, Director of Permit Services

S-1738-413-0, Aug 8 2008 12:42PM - BUSHT : Joint Inspection NOT Required

Southern Regional Office • 2700 M Street, Suite 275 • Bakersfield, CA 93301-2370 • (661) 326-6900 • Fax (661) 326-6985

7. This tank shall be in a leak-free condition. A leak-free condition is defined as a condition without a gas leak or a liquid leak. A gas leak is defined as a reading in excess of 10,000 parts per million by volume (ppmv), as methane, above background on a portable hydrocarbon detection instrument that is calibrated with methane in accordance with the procedures specified in EPA Test Method 21. A reading in excess of 10,000 ppmv above background is a violation of this permit. A liquid leak is defined as the dripping of organic liquid at a rate of more than 3 drops per minute. [District NSR Rule and District Rule 4623, 5.1] Federally Enforceable Through Title V Permit
8. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District NSR and District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
9. VOC fugitive emissions from the components in both gas and liquid service on this tank shall not exceed 0.2 lb-VOC/day [District NSR Rule] Federally Enforceable Through Title V Permit
10. Permittee shall maintain accurate component count for tank according to CAPCOA's "California Implementation Guidelines for Estimating Mass Emissions of Fugitive Hydrocarbon Leaks at Petroleum Facilities," Table IV-2c (Feb 1999), Screening Value Range emission factors < 10,000 ppmv. Permittee shall update such records when new components are approved and installed [District NSR Rule] Federally Enforceable Through Title V Permit
11. Except as otherwise provided in this permit, the operator shall ensure that the VOC vapor control system is functional and is operating as designed at all times. [District NSR Rule] Federally Enforceable Through Title V Permit
12. Any component found to be leaking is in violation of the District's NSR Rule, even if it is under the voluntary inspection and maintenance program. [District NSR Rule] Federally Enforceable Through Title V Permit
13. Operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
14. Upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
15. Upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
16. Components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
17. If a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623, Table 3] Federally Enforceable Through Title V Permit
18. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rule 2520, 9.4.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

19. Permittee shall notify the APCO in writing at least three (3) days prior to performing tank degassing and interior tank cleaning activities. Written notification shall include the following: 1) the Permit to Operate number and physical location of the tank being degassed, 2) the date and time that tank degassing and cleaning activities will begin, 3) the degassing method, as allowed in this permit, to be used, 4) the method to be used to clean the tank, including any solvents to be used, and 5) the method to be used to dispose of any removed sludge, including methods that will be used to control emissions from the receiving vessel and emissions during transport. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
20. This tank shall be degassed before commencing interior cleaning by one of the following methods (1) exhausting VOCs contained in the tank vapor space to an APCO-approved vapor recovery system until the organic vapor concentration is 5,000 ppmv or less, or is 10 percent or less of the lower explosion limit (LEL), whichever is less; or (2) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable liquid until 90 percent or more of the maximum operating level of the tank is filled. Suitable liquids are organic liquids having a TVP of less than 0.5 psia, water, clean produced water, or produced water derived from crude oil having a TVP less than 0.5 psia; or (3) displacing VOCs contained in the tank vapor space to an APCO-approved vapor recovery system by filling the tank with a suitable gas. Degassing shall continue until the operator has achieved a vapor displacement equivalent to at least 2.3 times the tank capacity. Suitable gases are air, nitrogen, carbon dioxide, or natural gas containing less than 10 percent VOC by weight. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
21. During tank degassing, the operator shall discharge or displace organic vapors contained in the tank vapor space to an APCO-approved vapor recovery system. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
22. To facilitate connection to an external APCO-approved recovery system, a suitable tank fitting, such as a manway, may be temporarily removed for a period of time not to exceed 1 hour. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
23. This tank shall be in compliance with the applicable requirements of District Rule 4623 at all times during draining, degassing, and refilling the tank with an organic liquid. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
24. After a tank has been degassed pursuant to the requirements of this permit, vapor control requirements are not applicable until an organic liquid is placed, held, or stored in this tank. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
25. While performing tank cleaning activities, operators may only use the following cleaning agents: diesel, solvents with an initial boiling point of greater than 302 degrees F, solvents with a vapor pressure of less than 0.5 psia, or solvents with 50 grams of VOC per liter or less. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
26. Steam cleaning shall only be allowed at locations where wastewater treatment facilities are limited, or during the months of December through March. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
27. During sludge removal, the operator shall control emissions from the sludge receiving vessel by operating an APCO-approved vapor control device that reduces emissions of organic vapors by at least 95%. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
28. Permittee shall only transport removed sludge in closed, liquid leak-free containers. [District Rule 4623, 5.7] Federally Enforceable Through Title V Permit
29. Permittee shall store removed sludge, until final disposal, in vapor leak-free containers, or in tanks complying with the vapor control requirements of District Rule 4623. Sludge that is to be used to manufacture roadmix, as defined in District Rule 2020, is not required to be stored in this manner. Roadmix manufacturing operations exempt pursuant to District Rule 2020 shall maintain documentation of their compliance with Rule 2020, and shall readily make said documentation available for District inspection upon request. [District Rules 2020 and 4623, 5.7] Federally Enforceable Through Title V Permit
30. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rules 2520, 9.4.2 and 4623, 6.3] Federally Enforceable Through Title V Permit

ATTACHMENT C

Emissions Increases

	SSIPE (lb/yr)				
	NOx	VOC	CO	SOx	PM10
S-1738-251-10	0	0	0	0	0
S-1738-412-1	0	73	0	0	0
S-1738-413-1	0	73	0	0	0
TOTAL	0	146	0	0	0

ATTACHMENT D

Application

San Joaquin Valley Air Pollution Control District

www.valleyair.org

RECEIVED

MAR 16 2010

Permit Application For:

ADMINISTRATIVE
AMENDMENT

MINOR
MODIFICATION

SIGNIFICANT
MODIFICATION

Permits Srvc
SJVAPCD

1. PERMIT TO BE ISSUED TO: <p style="text-align: center;">Vintage Production California LLC</p>	
2. MAILING ADDRESS: STREET/P.O. BOX: <u>10800 Stockdale Highway</u> CITY: <u>Bakersfield</u> STATE: <u>CA</u> 9-DIGIT ZIP CODE: <u>93311</u>	
3. LOCATION WHERE THE EQUIPMENT WILL BE OPERATED: <p style="text-align: center;">Light Oil Western Stationary Source, CA</p> STREET: _____ CITY: _____ _____ 1/4 SECTION _____ TOWNSHIP _____ RANGE _____	INSTALLATION DATE:
4. GENERAL NATURE OF BUSINESS: <u>Crude oil and natural gas production</u>	
5. DESCRIPTION OF EQUIPMENT OR MODIFICATION FOR WHICH APPLICATION IS MADE (include Permit #'s if known, and use additional sheets if necessary) <u>Minor Modification to convert the following three (3) Authorities to Construct to Permits to Operate:</u> <u>S-1738-251-8</u> <u>S-1738-412-0</u> <u>S-1738-413-0</u>	
6. TYPE OR PRINT NAME OF APPLICANT: <u>Richard Garcia</u>	TITLE OF APPLICANT: <u>Environmental Consultant</u>
7. SIGNATURE OF APPLICANT: 	DATE: <u>3/15/10</u> PHONE: <u>(661) 412-5216</u> FAX: <u>(661) 412-5270</u> EMAIL: <u>Richard_Garcia@oxy.com</u>

For APCD Use Only:

DATE STAMP	FILING FEE RECEIVED: \$ <u>0</u> CHECK#: _____
	DATE PAID: _____
	PROJECT NO: <u>S-1101358</u> FACILITY ID: <u>S-1738</u>

San Joaquin Valley Unified Air Pollution Control District

TITLE V MODIFICATION - COMPLIANCE CERTIFICATION FORM

I. TYPE OF PERMIT ACTION (Check appropriate box)

- SIGNIFICANT PERMIT MODIFICATION ADMINISTRATIVE
 MINOR PERMIT MODIFICATION AMENDMENT

COMPANY NAME: Vintage Production California, LLC	FACILITY ID: S - 1738
1. Type of Organization: <input checked="" type="checkbox"/> Corporation <input type="checkbox"/> Sole Ownership <input type="checkbox"/> Government <input type="checkbox"/> Partnership <input type="checkbox"/> Utility	
2. Owner's Name: Occidental of Elk Hills, Inc.	
3. Agent to the Owner: Roger Tucker, President and General Manager	

II. COMPLIANCE CERTIFICATION (Read each statement carefully and initial all circles for confirmation):

- ALG Based on information and belief formed after reasonable inquiry, the equipment identified in this application will continue to comply with the applicable federal requirement(s).
- ALG Based on information and belief formed after reasonable inquiry, the equipment identified in this application will comply with applicable federal requirement(s) that will become effective during the permit term, on a timely basis.
- ALG Corrected information will be provided to the District when I become aware that incorrect or incomplete information has been submitted.
- ALG Based on information and belief formed after reasonable inquiry, information and statements in the submitted application package, including all accompanying reports, and required certifications are true accurate and complete.

I declare, under penalty of perjury under the laws of the state of California, that the forgoing is correct and true:

Armando H. Gonzalez
 Signature of Responsible Official

3-15-10
 Date

Armando Gonzalez

 Name of Responsible Official (please print)

Manager, Health, Environment, Safety and Security

 Title of Responsible Official (please print)



OCCIDENTAL OF ELK HILLS, INC.

10800 Stockdale Highway, Bakersfield, CA 93311

Telephone 661 412-5000

RECEIVED

MAR 16 2010

Permits Svc
SJVAPCD

March 15, 2010

Mr. Jonah Aiyabei
Air Quality Engineer- Permitting Services
San Joaquin Valley Air Pollution Control District
Central Region Office
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244

RE: Applications for Minor Modifications for
Vintage Production California, LLC
Facility I.D. S-1738

Enclosed for your approval is a Permit Application for Minor Modifications to Vintage Petroleum California, LLC permits within Facility I.D. S-1738. The Facility is located in the Light Oil Western Stationary Source.

The Minor Modifications will convert outstanding Authorities to Construct (ATC) to Permits to Operate (PTO). We are applying to have the following three (3) ATCs converted:

- S-1738-251-8
- S-1738-412-0
- S-1738-413-0

Accompanying the application is a signed Title-V Modification Compliance Certification Form (TVFORM-009).

Please invoice Occidental of Elk Hills Inc. (OEHI) for the permit fees and associated engineering costs incurred to process the Minor Modifications. If you have any questions or require additional information, you may contact me at (661) 412-5216 or Rick Miwa of Vector Environmental at (661) 323-1477, x203.

Sincerely,

Richard Garcia
Environmental Consultant
Occidental of Elk Hills, Inc.

RG/ram

Enclosures (2)

ATTACHMENT E

Previous Title V Operating Permit No.
S-1738-251-9

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-1738-251-9

EXPIRATION DATE: 02/28/2014

SECTION: SW20 TOWNSHIP: 31S RANGE: 23E

EQUIPMENT DESCRIPTION:

84,588 GALLON FIXED ROOF PETROLEUM STORAGE TANK WITH VAPOR RECOVERY SYSTEM CONNECTED WITH PERMITS S-1738-336, -337, AND -343, INCLUDING 7.5 HP COMPRESSOR AND 15 HP COMPRESSOR SERVING PERMIT UNITS S-1738-252 THROUGH -254 (555 STEVENS ZONE UNIT).

PERMIT UNIT REQUIREMENTS

1. The tank shall be equipped with a vapor recovery system consisting of a closed vent system that collects all VOCs from the storage tank, and a VOC control device. The vapor recovery system shall be APCO-approved and maintained in leak-free condition. The VOC control device shall be either of the following: a vapor return or condensation system that connects to a gas pipeline distribution system, or an approved VOC destruction device that reduces the inlet VOC emissions by at least 95% by weight as determined by the test method specified in Section 6.4.6. [District Rule 4623] Federally Enforceable Through Title V Permit
2. All piping valves and fittings shall be constructed and maintained in a leak-free condition. [District Rule 4623, 5.6.3] Federally Enforceable Through Title V Permit
3. A leak-free condition is defined as a condition without a gas leak or a liquid leak. A gas leak is defined as a reading in excess of 10,000 ppmv, above background, as measured by a portable hydrocarbon detection instrument in accordance with the procedures specified in EPA Test Method 21. A liquid leak is defined as the dripping of organic liquid at a rate of more than 3 drops per minute. A reading in excess of 10,000 ppmv above background or the dripping of organic liquid at a rate of more than 3 drops per minute is a violation of this permit and Rule 4623 and shall be reported as a deviation. [District Rule 4623, 3.11, 3.17, 3.18, and 6.4.8] Federally Enforceable Through Title V Permit
4. Any tank gauging or sampling device on a tank vented to the vapor recovery system shall be equipped with a leak-free cover which shall be closed at all times except during gauging or sampling. [District Rule 4623, 5.6.2] Federally Enforceable Through Title V Permit
5. The operator shall ensure that the vapor recovery system is functional and is operating as designed at all times. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
6. The operator of a fixed roof tank shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
7. Compliance with permit conditions in the Title V permit shall be deemed compliance with District Rule 4623 (Amended May 19, 2005). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
8. This unit has a storage capacity less than 420,000 gallons and is used for petroleum or condensate stored, processed and/or treated at a drilling and production facility prior to custody transfer. Therefore, the requirements of 40CFR 60 Subpart K, Ka and Kb do not apply to this source. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
9. Tank shall not be used to store or process liquids if the vapor control system is inoperable. [District NSR Rule] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

10. Vapor recovery system shall vent to gas plant (permit S-39-1) only. [District NSR Rule] Federally Enforceable Through Title V Permit
11. Operator shall visually inspect tank shell, hatches, seals, seams, cable seals, valves, flanges, connectors, and any other piping components directly affixed to the tank and within five feet of the tank at least once per year for liquid leaks, and with a portable hydrocarbon detection instrument conducted in accordance with EPA Method 21 for gas leaks. Operator shall also visually or ultrasonically inspect as appropriate, the external shells and roofs of uninsulated tanks for structural integrity annually. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
12. Upon detection of a liquid leak, defined as a leak rate of greater than or equal to 30 drops per minute, operator shall repair the leak within 8 hours. For leaks with a liquid leak rate of between 3 and 30 drops per minute, the leaking component shall be repaired within 24 hours after detection. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
13. Upon detection of a gas leak, defined as a VOC concentration of greater than 10,000 ppmv measured in accordance with EPA Method 21, operator shall take one of the following actions: 1) eliminate the leak within 8 hours after detection; or 2) if the leak cannot be eliminated, then minimize the leak to the lowest possible level within 8 hours after detection by using best maintenance practices, and eliminate the leak within 48 hours after minimization. In no event shall the total time to minimize and eliminate a leak exceed 56 hours after detection. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
14. Components found to be leaking either liquids or gases shall be immediately affixed with a tag showing the component to be leaking. Operator shall maintain records of the liquid or gas leak detection readings, date/time the leak was discovered, and date/time the component was repaired to a leak-free condition. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
15. Leaking components that have been discovered by the operator that have been immediately tagged and repaired within the timeframes specified in District Rule 4623, Table 3 shall not constitute a violation of this rule. Leaking components as defined by District Rule 4623 discovered by District staff that were not previously identified and/or tagged by the operator, and/or any leaks that were not repaired within the timeframes specified in District Rule 4623, Table 3 shall constitute a violation of this rule. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
16. If a component type for a given tank is found to leak during an annual inspection, operator shall conduct quarterly inspections of that component type on the tank or tank system for four consecutive quarters. If no components are found to leak after four consecutive quarters, the operator may revert to annual inspections. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
17. Any component found to be leaking on two consecutive annual inspections is in violation of this rule, even if covered under the voluntary inspection and maintenance program. [District Rule 4623 (Table 3)] Federally Enforceable Through Title V Permit
18. Operator shall maintain an inspection log containing the following 1) Type of component leaking; 2) Date and time of leak detection, and method of detection; 3) Date and time of leak repair, and emission level of recheck after leak is repaired; 4) Method used to minimize the leak to lowest possible level within 8 hours after detection. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
19. The control efficiency of any VOC destruction device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case US EPA Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25A provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of the known analytes/compounds to ensure that the VOC concentrations are neither under- or over-reported. Analysis of halogenated exempt compounds shall be analyzed by ARB Method 422 "Exempt Halogenated VOCs in Gases September 12, 1990." [District Rule 4623, 6.4.6 and 6.4.7] Federally Enforceable Through Title V Permit
20. Operator shall monitor vapor recovery compressor activation and shut off manometer pressures on quarterly basis to ensure that compressor activation pressure does not exceed pressure relief valve setting. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

21. Operator shall inspect pressure relief valve for fugitive leaks annually in accordance with EPA Method 21, with the instrument calibrated with methane. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.