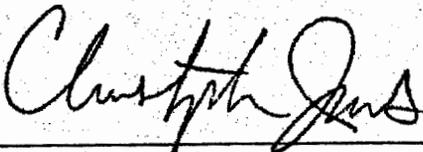


3745-18-22 Coshocton county emission limits.

- (A) No owner or operator of any coal-fired steam generating unit, unless otherwise specified below, shall cause or permit the emission of sulfur dioxide from any source to exceed a maximum of 4.5 pounds of sulfur dioxide per MM Btu actual heat input.
- (B) The "Columbus Southern Power Company, Conesville Generating Station" (OEPA premise number 0616000000) or any subsequent owner or operator of the "Columbus Southern Power Company, Conesville Generating Station," Conesville, Ohio shall not cause or permit the emission of sulfur dioxide from the following sources to exceed the amount indicated:
- (1) Conesville numbers 1 through 4 (OEPA source numbers B001 through B004); a maximum of 5.66 pounds of sulfur dioxide per MM Btu actual heat input from each boiler.
  - (2) Conesville numbers 5 and 6 (OEPA source numbers B007 and B008); a maximum of 1.2 pounds of sulfur dioxide per MM Btu actual heat input from each boiler, ~~provided that an emission limit of 0.0 pounds of sulfur dioxide per MM Btu actual heat input is effective in 40 CFR 52.1881(a) for the sources specified in paragraph (B) of rule 3745-18-11 of the Administrative Code. This source must also comply with applicable new source performance standards.~~
  - (3) ~~Conesville numbers 5 and 6 (OEPA source numbers B007 and B008); a maximum of 1.1 pounds of sulfur dioxide per MM Btu actual heat input from each boiler provided that an emission limit of 7.9 pounds of sulfur dioxide per MM Btu actual heat input from each boiler is effective in 40 CFR 52.1881(a) for the sources specified in paragraph (B)(1) of rule 3745-18-11 of the Administrative Code. This source must also comply with applicable new source performance standards.~~
  - (4) Diesel numbers 1 through 5 ~~3~~(OEPA source number NUMBERS B006, B009 AND B010); a maximum of 0.52 pounds of sulfur dioxide per MM Btu actual heat input from each diesel.

- (5)(4) Auxiliary boiler number 4 (OEPA source number B005); a maximum of 0.52 pounds of sulfur dioxide per MM Btu ACTUAL heat input.
- (C) The "St. Regis Paper Company" (OEPA premise number 0616010028) or any subsequent owner or operator of the "St. Regis Paper Company, Papermill Road, Coshocton, Ohio" shall not cause or permit the emission of sulfur dioxide from boiler number 4 (OEPA source number B003); a maximum of 1.2 pounds of sulfur dioxide per MM Btu actual heat input.
- (D) The "General Electric Company" (OEPA premise number 0616010029) or any subsequent owner or operator of the "General Electric Company, 1350 South Second Street, Coshocton, Ohio" shall not cause or permit the emission of sulfur dioxide from the following sources to exceed the amounts indicated and shall limit the operation of said sources such that the indicated average operating rates are not exceeded for any calendar day:
- (1) Boilers FF16 number 48 8051 and FF16 number 48 8052 (OEPA source numbers B001 and B002); a maximum of 2.2 pounds of sulfur dioxide per MM Btu actual heat input and a combined average operating rate of 87.0 MM Btu per hour.
  - (2) The Trane-Murray boiler number 3 (OEPA source number B004); a maximum of 1.6 pounds of sulfur dioxide per MM Btu actual heat input.

Effective: MAR 21 2000

Certification:   
Christopher Jones  
Director, Ohio EPA

MAR 01 2000  
Date

Promulgated under: RC Chapter 119  
Rule authorized by: RC Chapter 3704.03  
Rule amplifies: RC Chapter 3704  
Prior effective date: 12/28/79, 6/15/89  
119.032 review date: 12-31-00