



JUN 09 2010

Wendy Garcia
Constellation Wines US dba Turner Road Vintners
4614 W Turner Rd
Lodi, CA 95242

**Re: Notice of Final Action - Title V Permit Renewal
District Facility # N-4939
Project # N-1091645**


Dear Ms. Garcia:

The District has issued the Final Renewed Title V Permit for Constellation Wines US dba Turner Road Vintners. The preliminary decision for this project was made on April 22, 2010. No comments were received subsequent to the District preliminary decision.

The public notice for issuance of the Final Renewed Title V Permit will be published approximately three days from the date of this letter.

Thank you for your cooperation in this matter. Should you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

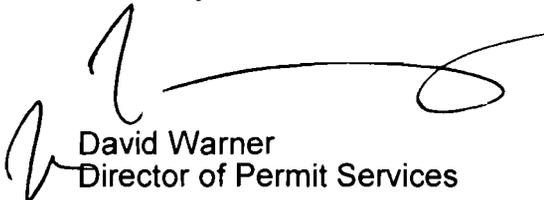
David Warner
Director of Permit Services

Attachments

cc: Juscelino Siongco, Permit Services Engineer

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



JUN 09 2010

Gerardo C. Rios, Chief
Permits Office (AIR-3)
U.S. EPA - Region IX
75 Hawthorne St.
San Francisco, CA 94105

**Re: Notice of Final Action - Title V Permit Renewal
District Facility # N-4939
Project # N-1091645**


Dear Mr. Rios:

The District has issued the Final Renewed Title V Permit for Constellation Wines US dba Turner Road Vintners. The preliminary decision for this project was made on April 22, 2010. No comments were received subsequent to the District preliminary decision.

The public notice for issuance of the Final Renewed Title V Permit will be published approximately three days from the date of this letter.

I would like to thank you and your staff for working with us. We appreciate your concurrence with this action. Should you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

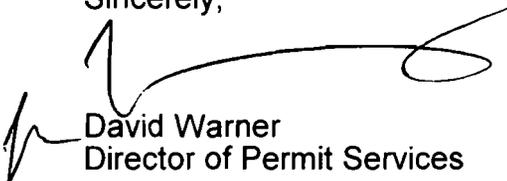

David Warner
Director of Permit Services

Attachments

cc: Juscelino Siongco, Permit Services Engineer

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585



JUN 09 2010

Mike Tollstrup, Chief
Project Assessment Branch
Air Resources Board
P O Box 2815
Sacramento, CA 95812-2815

**Re: Notice of Final Action - Title V Permit Renewal
District Facility # N-4939
Project # N-1091645**


Dear Mr. Tollstrup:

The District has issued the Final Renewed Title V Permit for Constellation Wines US dba Turner Road Vintners. The preliminary decision for this project was made on April 22, 2010. No comments were received subsequent to the District preliminary decision.

The public notice for issuance of the Final Renewed Title V Permit will be published approximately three days from the date of this letter.

I would like to thank you and your staff for working with us. Should you have any questions, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

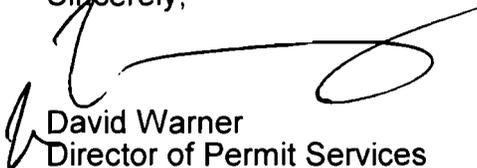

David Warner
Director of Permit Services

Attachments

cc: Juscelino Siongco, Permit Services Engineer

Seyed Sadredin
Executive Director/Air Pollution Control Officer

Northern Region
4800 Enterprise Way
Modesto, CA 95356-8718
Tel: (209) 557-6400 FAX: (209) 557-6475

Central Region (Main Office)
1990 E. Gettysburg Avenue
Fresno, CA 93726-0244
Tel: (559) 230-6000 FAX: (559) 230-6061

Southern Region
34946 Flyover Court
Bakersfield, CA 93308-9725
Tel: 661-392-5500 FAX: 661-392-5585

**SAN JOAQUIN VALLEY
AIR POLLUTION CONTROL DISTRICT
NOTICE OF FINAL DECISION TO ISSUE
RENEWED FEDERALLY MANDATED OPERATING PERMIT**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Air Pollution Control District has made its final decision to issue the renewed Federally Mandated Operating Permit to Constellation Wines US dba Turner Road Vintners for its wine production facility, 4614 West Turner Road, Lodi, California.

The District's analysis of the legal and factual basis for this proposed action, project #N-1091645, is available for public inspection at http://www.valleyair.org/notices/public_notices_idx.htm and the District office at the address below. For additional information regarding this matter, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900, or contact David Warner, Director of Permit Services, in writing at SAN JOAQUIN VALLEY AIR POLLUTION CONTROL DISTRICT, 1990 E. GETTYSBURG AVE, FRESNO, CA 93726-0244.

**SAN JOAQUIN VALLEY
AIR POLLUTION CONTROL DISTRICT**

**Final Title V Permit Renewal Evaluation
C W US Inc dba Turner Road Vintners
N-4939**

TABLE OF CONTENTS

I.	PROPOSAL	2
II.	FACILITY LOCATION	2
III.	EQUIPMENT LISTING	3
IV.	GENERAL PERMIT TEMPLATE USAGE	3
V.	SCOPE OF EPA AND PUBLIC REVIEW	3
VI.	FEDERALLY ENFORCEABLE REQUIREMENTS	3
VII.	REQUIREMENTS NOT FEDERALLY ENFORCEABLE	5
VIII.	PERMIT REQUIREMENTS	7
IX.	PERMIT SHIELD	14
X.	PERMIT CONDITIONS	15
XI.	ATTACHMENTS	15
A.	DRAFT RENEWED TITLE V OPERATING PERMIT	
B.	PREVIOUS TITLE V OPERATING PERMIT	
C.	DETAILED FACILITY LIST	

TITLE V PERMIT RENEWAL EVALUATION
Wine Production

Engineer: Juscelino Siongco
Date: June 8, 2010

Facility Number: N-4939
Facility Name: C W US Inc dba Turner Road Vintners
Mailing Address: 4614 West Turner Road
Lodi, CA 95242

Contact Name: Wendy Garcia
Phone: (559) 661-5534

Responsible Official: Curtis Robinson
Title: General Manager

Project # : N-1091645
Deemed Complete: April 8, 2009

I. PROPOSAL

C W US Inc dba Turner Road Vintners was issued a Title V permit on October 31, 2004. As required by District Rule 2520, the applicant is requesting a permit renewal. The existing Title V permit shall be reviewed and modified to reflect all applicable District and federal rules updated, removed, or added since the issuance of the initial Title V permit.

The purpose of this evaluation is to provide the legal and factual basis for all updated applicable requirements and to determine if the facility will comply with these updated requirements. It also specifically identifies all additions, deletions, and/or changes made to permit conditions or equipment descriptions.

II. FACILITY LOCATION

Turner Road Vintners is located at 4614 West Turner Road, Lodi, in San Joaquin County.

III. EQUIPMENT LISTING

A detailed facility printout listing all permitted equipment at the facility is included as Attachment C.

IV. GENERAL PERMIT TEMPLATE USAGE

The applicant is requesting to use the following model general permit Templates:

A. Template SJV-UM-0-2 Facility Wide Umbrella

The applicant has requested to utilize template No. SJV-UM-0-2, Facility Wide Umbrella. Based on the information submitted in the Template Qualification Form, the applicant qualifies for the use of this template.

V. SCOPE OF EPA AND PUBLIC REVIEW

Certain segments of the proposed Renewed Operating Permit are based on model general permit templates that have been previously subject to EPA and public review. The terms and conditions from the model general permit templates are included in the proposed permit and are not subject to further EPA and public review.

For permit applications utilizing model general permit templates, public and agency comments on the District's proposed actions are limited to the applicant's eligibility for model general permit template, applicable requirements not covered by the model general permit template, and the applicable procedural requirements for issuance of Title V Operating Permits.

The following permit conditions, including their underlying applicable requirements, originate from model general permit templates and are not subject to further EPA or public review.

Conditions 1 through 40 of the requirements for permit unit N-4939-0-1.

VI. FEDERALLY ENFORCEABLE REQUIREMENTS

A. Rules Updated

- District Rule 2020, Exemptions
(amended September 21, 2006 ⇒ amended December 20, 2007)

- District Rule 2201, New and Modified Stationary Source Review Rule
(amended December 15, 2005 ⇒ amended September 21, 2006)
- District Rule 4101, Visible Emissions
(amended November 15, 2001 ⇒ amended February 17, 2005)
- District Rule 4601, Architectural Coatings
(amended October 31, 2001 ⇒ amended December 17, 2009)
- District Rule 4702, Internal Combustion Engines–Phase 2
(amended April 20, 2006 ⇒ amended January 18, 2007)
- District Rule 8011, General Requirements
(adopted November 15, 2001 ⇒ amended August 19, 2004)
- District Rule 8021, Construction, Demolition, Excavation, Extraction, and Other Earthmoving Activities
(adopted November 15, 2001 ⇒ amended August 19, 2004)
- District Rule 8031, Bulk Materials
(adopted November 15, 2001 ⇒ amended August 19, 2004)
- District Rule 8041, Carryout and Trackout
(adopted November 15, 2001 ⇒ amended August 19, 2004)
- District Rule 8051, Open Areas
(adopted November 15, 2001 ⇒ amended August 19, 2004)
- District Rule 8061, Paved and Unpaved Roads
(adopted November 15, 2001 ⇒ amended August 19, 2004)
- District Rule 8071, Unpaved Vehicle/Equipment Traffic Areas
(adopted November 15, 2001 ⇒ amended September 16, 2004)
- 40 CFR Part 63, Subpart ZZZZ, National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines (amended January 18, 2008)
- 40 CFR Part 82, Subpart B, Stratospheric Ozone
(amended November 9, 2007)

- 40 CFR Part 82, Subpart F, Stratospheric Ozone (amended June 8, 2008)

B. Rules Not Updated

- District Rule 2010, Permits Required (amended December 17, 1992)
- District Rule 2031, Transfer of Permits (amended December 17, 1992)
- District Rule 2070, Standards for Granting Applications (amended December 17, 1992)
- District Rule 2080, Conditional Approval (amended December 17, 1992)
- District Rule 2520, Federally Mandated Operating Permits (amended June 21, 2001)
- District Rule 4201, Particulate Matter Concentration (amended December 17, 1992)
- District Rule 4701, Internal Combustion Engines (amended August 21, 2003)
- 40 CFR Part 60, Subpart IIII, Standards of Performance for Stationary Compression Ignition Internal Combustion Engines
- 40 CFR Part 61, Subpart M, National Emission Standard for Asbestos (amended September 18, 2003)

VII. REQUIREMENTS NOT FEDERALLY ENFORCEABLE

For each Title V source, the District issues a single permit that contains the Federally Enforceable requirements, as well as the District-only requirements. The District-only requirements are not a part of the Title V Operating Permits. The terms and conditions that are part of the facility's Title V permit are designated as "Federally Enforceable Through Title V Permit."

For this facility, the following are not federally enforceable and will not be discussed in further detail:

A. District Rule 4102, Nuisance (as amended December 17, 1992)

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 42 of the requirements for this permit unit is based on this rule and is not Federally Enforceable through Title V.

b. N-4939-1-3 – 244 bhp Cummins Model 6BTA-5.9 Diesel-Fired Emergency IC Engine Powering a Firewater Pump

- Condition 11 of the requirements for this permit unit is based on this rule and is not Federally Enforceable through Title V.

B. District Rule 4694, Wine Fermentation and Storage Tanks (adopted December 15, 2005)

a. N-4939-0-1 Facility-Wide Requirements

- Conditions 43 through 47 of the requirements for this permit unit are based on this rule and are not Federally Enforceable through Title V.

b. N-4939-2-1 through -95-1, Concrete Fermentation/Storage Tanks

- Conditions 1 and 2 of the requirements for these permit units are based on this rule and are not Federally Enforceable through Title V.

c. N-4939-96-1 through -351-1, Stainless Steel Fermentation/Storage Tanks with Pressure/Vacuum Valve

- Conditions 1 through 5 of the requirements for these permit units are based on this rule and are not Federally Enforceable through Title V.

C. Title 17, California Code of Regulations Section 93115, Airborne Toxic Control Measure for Stationary Compression Ignition (CI) Engines

a. N-4939-1-3 – 244 bhp Cummins Model 6BTA-5.9 Diesel-Fired Emergency IC Engine Powering a Firewater Pump

- Conditions 7 and 8 of the requirements for this permit unit are based on this rule and are not Federally Enforceable through Title V.

VIII. PERMIT REQUIREMENTS

The purpose of this evaluation is to review changes to federally enforceable requirements; therefore, this compliance section will only address rules that have been amended or added since the issuance of the initial Title V permit.

A. District Rule 2020 - Exemptions

District Rule 2020 lists equipment, which are specifically exempt from obtaining permits, and specifies recordkeeping requirements to verify such exemptions. The rule was amended in December 20, 2007. The amendments to this rule do not have any affect on current permit requirements and will therefore not be addressed in this evaluation.

B. District Rule 2201 - New and Modified Stationary Source Review Rule

District Rule 2201 has been amended, September 21, 2006, since this facility's initial Title V permit was issued. This Title V permit renewal does not constitute a modification per section 3.26, defined as an action including at least one of the following items:

- 1) Any change in hours of operation, production rate, or method of operation of an existing emissions unit, which would necessitate a change in permit conditions.
- 2) Any structural change or addition to an existing emissions unit which would necessitate a change in permit conditions. Routine replacement shall not be considered to be a structural change.
- 3) An increase in emissions from an emissions unit caused by a modification of the Stationary Source when the emissions unit is not subject to a daily emissions limitation.
- 4) Addition of any new emissions unit which is subject to District permitting requirements.
- 5) A change in a permit term or condition proposed by an applicant to obtain an exemption from an applicable requirement to which the source would otherwise be subject.

Therefore, the updated requirements of this rule are not applicable at this time.

C. District Rule 4101 - Visible Emissions

District Rule 4101 prohibits the discharge of any air contaminant for a period or periods aggregating more than 3 minutes in any one hour which is as dark or darker in shade as that designated as No. 1 on the Ringelmann Chart; or is

of such opacity as to obscure an observer's view to a degree equal to or greater than the smoke described in Section 5.1 of Rule 4101. The rule was amended in February 17, 2005.

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 22 on the proposed permit assures compliance with the requirements of this rule.

D. District Rule 4601 - Architectural Coatings

This rule limits the emissions of VOCs from architectural coatings. It requires limiting the application of any architectural coating to no more than what is listed in the Table of Standards (Section 5.0). The rule was amended in December 17, 2009. Since the following changes included in the latest rule amendment did not result in adding new requirements and/or revising current requirements in the facility-wide permit N-4939-0-1, no further evaluation is needed.

Section 2.0 – Applicability

The phrase “blends or repackages” was added to rule language to extend the applicability of rule language to facilities involved in those activities.

Section 3.0 – Definitions

Numerous definitions was added, deleted or modified in order to make the amended rule harmonize with definitions and rule requirements presented in the California Air Resources Board (ARB) Suggested Control Measures (SCM).

Section 4.0 – Exemptions

A reporting requirement was added for any architectural coating that is sold in a container with a volume of one liter or less. The exemption for architectural coatings was further defined by adding “coatings that are supplied and offered for sale” to current language, in order to make the rule consistent with the ARB SCM.

Section 5.0 – Requirements

The amended rule implements the recommended VOC limits per the ARB SCM. The following changes were as follows: 15 coating categories were eliminated, ten were added, nineteen coatings categories remained unchanged, and the VOC content limits for 19 categories were lowered.

Section 6.0 – Administrative Requirements

Section 6.1 - Labeling Requirements

Labeling requirements were updated to add new labeling standards consistent with new coatings categories per the SCM.

Section 6.2 - Reporting Requirements

A new section was added to include reporting requirements per the SCM. The SCM contains a new requirement to submit sales data. Collection of this data is authorized in the California Health and Safety Code which requires submission of data to estimate emissions.

Section 6.3 - Test Methods

New sections were added to coincide with new coating categories pursuant to the ARB SCM.

Section 7.0 – Compliance Schedule

This section was updated to account for the new amendments to rule language by adding the phrase “the dates specified within the text of the rule.”

Section 8.0 – Averaging Compliance Option

This section was deleted in its entirety.

a. N-4939-0-1 – Facility-Wide Requirements

- Conditions 23, 24, and 25 on the proposed permit assure compliance with this rule.

E. District Rule 4702 - Internal Combustion Engines–Phase 2

This rule limits emissions of nitrogen oxides (NOx), carbon monoxide (CO), and volatile organic compounds (VOC) from internal combustion (IC) engines. The rule was amended in January 18, 2007.

a. N-4939-1-3 – 244 bhp Cummins Model 6BTA-5.9 Diesel-Fired Emergency IC Engine Powering a Firewater Pump

- Conditions 2, 3, 5, and 6 on the proposed permit assure compliance with this rule.

F. District Rule 8011 - General Requirements

The provisions of this rule are applicable to specified outdoor fugitive dust sources. The definitions, exemptions, requirements, administrative requirements, recordkeeping requirements, and test methods set forth in this rule are applicable to all Rules under Regulation VIII (Fugitive PM10 Prohibitions) of the Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. The rule was amended in August 19, 2004.

a. N-4939-0-1 – Facility-Wide Requirements

- Conditions 29 through 34 on the proposed permit assure compliance with this rule.

G. District Rule 8021 - Construction, Demolition, Excavation, Extraction, and Other Earthmoving Activities

The purpose of this rule is to limit fugitive dust emissions from construction, demolition, excavation, extraction, and other earthmoving activities. The rule was amended in August 19, 2004.

This rule applies to any construction, demolition, excavation, extraction, and other earthmoving activities, including, but not limited to, land clearing, grubbing, scraping, travel on site, and travel on access roads to and from the site. This rule also applies to the construction of new landfill disposal sites or modification to existing landfill disposal sites prior to commencement of landfilling activities.

Section 5.0 requires that no person shall perform any construction, demolition, excavation, extraction, or other earthmoving activities unless the appropriate requirements in sections 5.1 and 5.2 are sufficiently implemented to limit VDE to 20% opacity. In addition to the requirements of this rule, a person shall comply with all other applicable requirements of Regulation VIII.

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 29 on the proposed permit assures compliance with this rule.

H. District Rule 8031 - Bulk Materials

The purpose of this rule is to limit fugitive dust emissions from the outdoor handling, storage, and transport of bulk materials. The rule was amended in August 19, 2004.

This rule applies to the outdoor handling, storage, and transport of any bulk material.

Section 5.0 requires that no person shall perform any outdoor handling, storage, and transport of bulk materials unless the appropriate requirements in Table 8031-1 of this rule are sufficiently implemented to limit VDE to 20% opacity or to comply with the conditions for a stabilized surface as defined in Rule 8011. In addition to the requirements of this rule, a person shall comply with all other applicable requirements of Regulation VIII.

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 30 on the proposed permit assures compliance with this rule.

I. District Rule 8041 - Carryout and Trackout

The purpose of this rule is to limit fugitive dust emissions from carryout and trackout. The rule was amended in August 19, 2004.

This rule applies to all sites that are subject to Rules 8021 (Construction, Demolition, Excavation, Extraction, and other Earthmoving Activities), 8031 (Bulk Materials), and 8071 (Unpaved Vehicle and Equipment Traffic Areas) where carryout or trackout has occurred or may occur.

Section 5.0 requires that an owner/operator shall sufficiently prevent or cleanup carryout and trackout as specified in sections 5.1 through 5.8. In addition to the requirements of this rule, a person shall comply with all other applicable requirements of Regulation VIII. The use of blower devices, or dry rotary brushes or brooms, for removal of carryout and trackout on public roads is expressly prohibited. The removal of carryout and trackout from paved public roads does not exempt an owner/operator from obtaining state or local agency permits which may be required for the cleanup of mud and dirt on paved public roads.

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 31 on the proposed permit assures compliance with this rule.

J. District Rule 8051 - Open Areas

The purpose of this rule is to limit fugitive dust emissions from open areas. The rule was amended in August 19, 2004.

This rule applies to any open area having 3.0 acres or more of disturbed surface area that has remained undeveloped, unoccupied, unused, or vacant for more than seven days.

Section 5.0 requires that whenever open areas are disturbed or vehicles are used in open areas, the owner/operator shall implement one or a combination of control measures indicated in Table 8051-1 to comply with the conditions of a stabilized surface at all times and to limit VDE to 20% opacity. In addition to the requirements of this rule, a person shall comply with all other applicable requirements of Regulation VIII.

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 32 on the proposed permit assures compliance with this rule.

K. District Rule 8061 - Paved and Unpaved Roads

The purpose of this rule is to limit fugitive dust emissions from paved and unpaved roads by implementing control measures and design criteria. The rule was amended in August 19, 2004.

This rule applies to any new or existing public or private paved or unpaved road, road construction project, or road modification project.

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 33 on the proposed permit assures compliance with this rule.

L. District Rule 8071 - Unpaved Vehicle/Equipment Traffic Area

The purpose of this rule is to limit fugitive dust emissions from unpaved vehicle and equipment traffic areas by implementing control measures and design criteria. The rule was amended in September 16, 2004.

This rule applies to any unpaved vehicle/equipment traffic area of 1.0 acre or larger.

a. N-4939-0-1 – Facility-Wide Requirements

- Condition 34 on the proposed permit assures compliance with this rule.

M. 40 CFR Part 82, Subpart B and F, Stratospheric Ozone

These regulations apply to servicing motor vehicles when this service involves the ozone-depleting refrigerant in the motor vehicle air conditioner (MVAC). Sections of these regulations were amended in 2004 and 2008.

a. N-4939-0-1 – Facility-Wide Requirements

- Conditions 27 and 28 on the proposed permit assure compliance with this rule.

N. 40 CFR Part 60, Subpart IIII, Standards of Performance for Stationary Compression Ignition Internal Combustion Engines

This subpart applies to owners and operators of stationary compression ignition (CI) internal combustion engines (ICE) that commences construction, modify, or reconstruct their stationary CI ICE after July 11, 2005.

Permit unit N-4939-1 was installed prior to July 11, 2005 and is not subject to this subpart.

O. 40 CFR Part 63, Subpart ZZZZ, National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines

This subpart establishes national emission limitations and operating limitations for hazardous air pollutants (HAP) emitted from stationary

reciprocating internal combustion engines (RICE) located at major and area sources of HAP emissions.

The facility is not a major or area source of HAP emissions and is not subject to this subpart.

P. 40 CFR Part 64-CAM

40 CFR Part 64 requires Compliance Assurance Monitoring (CAM) for units that meet the following three criteria:

- 1) the unit must have an emission limit for the pollutant;
- 2) the unit must have add-on controls for the pollutant; these are devices such as flue gas recirculation (FGR), baghouses, and catalytic oxidizers; and
- 3) the unit must have a pre-control potential to emit of greater than the major source thresholds.

a. N-4939-1-3 – 244 bhp Cummins Model 6BTA-5.9 Diesel-Fired Emergency IC Engine Powering a Firewater Pump

This engine does not have any emissions limits or add-on controls for any pollutant that would cause the unit to be subject to this requirement. Therefore, CAM is not required.

b. N-4939-2-1 through -351-1, Fermentation/Storage Tanks

These fermentation/storage tanks do not have any emissions limits or add-on controls for any pollutant that would cause the unit to be subject to this requirement. Therefore, CAM is not required.

IX. PERMIT SHIELD

A permit shield legally protects a facility from enforcement of the shielded regulations when a source is in compliance with the terms and conditions of the Title V permit. Compliance with the terms and conditions of the Operating Permit is considered compliance with all applicable requirements upon which those conditions are based, including those that have been subsumed.

A. Requirements Addressed by Model General Permit Templates

a. Model General Permit Template SJV-UM-0-2

By submitting Model General Permit Template SJV-UM-0-2 qualification form, the applicant has requested that a permit shield be granted for all the applicable requirements identified by the template. Therefore, the permit shields as granted in Model General Permit Template are included as conditions 39 and 40 of the facility-wide requirements (N-4939-0-1).

X. PERMIT CONDITIONS

See Attachment A - Renewed Title V Operating Permit.

XI. ATTACHMENTS

- A. Renewed Title V Operating Permit
- B. Previous Title V Operating Permit
- C. Detailed Facility List

ATTACHMENT A

Renewed Title V Operating Permit

San Joaquin Valley Air Pollution Control District

FACILITY: N-4939-0-1

EXPIRATION DATE: 08/31/2014

FACILITY-WIDE REQUIREMENTS

1. The owner or operator shall notify the District of any breakdown condition as soon as reasonably possible, but no later than one hour after its detection, unless the owner or operator demonstrates to the District's satisfaction that the longer reporting period was necessary. [District Rule 1100, 6.1; County Rules 110 (Fresno, Stanislaus, San Joaquin); 109 (Merced); 113 (Madera); and 111 (Kern, Tulare, Kings)] Federally Enforceable Through Title V Permit
2. The District shall be notified in writing within ten days following the correction of any breakdown condition. The breakdown notification shall include a description of the equipment malfunction or failure, the date and cause of the initial failure, the estimated emissions in excess of those allowed, and the methods utilized to restore normal operations. [District Rule 1100, 7.0; County Rules 110 (Fresno, Stanislaus, San Joaquin); 109 (Merced); 113 (Madera); and 111 (Kern, Tulare, Kings)] Federally Enforceable Through Title V Permit
3. The owner or operator of any stationary source operation that emits more than 25 tons per year of nitrogen oxides or reactive organic compounds, shall provide the District annually with a written statement in such form and at such time as the District prescribes, showing actual emissions of nitrogen oxides and reactive organic compounds from that source. [District Rule 1160, 5.0] Federally Enforceable Through Title V Permit
4. Any person building, altering or replacing any operation, article, machine, equipment, or other contrivance, the use of which may cause the issuance of air contaminants or the use of which may eliminate, reduce, or control the issuance of air contaminants, shall first obtain an Authority to Construct (ATC) from the District unless exempted by District Rule 2020 (12/20/07). [District Rule 2010, 3.0 and 4.0; and 2020] Federally Enforceable Through Title V Permit
5. The permittee must comply with all conditions of the permit including permit revisions originated by the District. All terms and conditions of a permit that are required pursuant to the Clean Air Act (CAA), including provisions to limit potential to emit, are enforceable by the EPA and Citizens under the CAA. Any permit noncompliance constitutes a violation of the CAA and the District Rules and Regulations, and is grounds for enforcement action, for permit termination, revocation, reopening and reissuance, or modification; or for denial of a permit renewal application. [District Rules 2070, 7.0; 2080; and 2520, 9.8.1 and 9.12.1] Federally Enforceable Through Title V Permit
6. A Permit to Operate or an Authority to Construct shall not be transferred unless a new application is filed with and approved by the District. [District Rule 2031] Federally Enforceable Through Title V Permit
7. Every application for a permit required under Rule 2010 (12/17/92) shall be filed in a manner and form prescribed by the District. [District Rule 2040] Federally Enforceable Through Title V Permit
8. The operator shall maintain records of required monitoring that include: 1) the date, place, and time of sampling or measurement; 2) the date(s) analyses were performed; 3) the company or entity that performed the analysis; 4) the analytical techniques or methods used; 5) the results of such analysis; and 6) the operating conditions at the time of sampling or measurement. [District Rule 2520, 9.4.1] Federally Enforceable Through Title V Permit
9. The operator shall retain records of all required monitoring data and support information for a period of at least 5 years from the date of the monitoring sample, measurement, or report. Support information includes copies of all reports required by the permit and, for continuous monitoring instrumentation, all calibration and maintenance records and all original strip-chart recordings. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate. Any amendments to these Facility-wide Requirements that affect specific Permit Units may constitute modification of those Permit Units.

Facility Name: C W US INC DBA TURNER ROAD VINTNERS
Location: 4614 WEST TURNER ROAD,(EAST FACILITY),LODI, CA 95242
N-4939-0-1 : Jun 8 2010 9:05AM - SIONGCOJ

10. The operator shall submit reports of any required monitoring at least every six months unless a different frequency is required by an applicable requirement. All instances of deviations from permit requirements must be clearly identified in such reports. [District Rule 2520, 9.5.1] Federally Enforceable Through Title V Permit
11. Deviations from permit conditions must be promptly reported, including deviations attributable to upset conditions, as defined in the permit. For the purpose of this condition, promptly means as soon as reasonably possible, but no later than 10 days after detection. The report shall include the probable cause of such deviations, and any corrective actions or preventive measures taken. All required reports must be certified by a responsible official consistent with section 10.0 of District Rule 2520 (6/21/01). [District Rules 2520, 9.5.2 and 1100, 7.0] Federally Enforceable Through Title V Permit
12. If for any reason a permit requirement or condition is being challenged for its constitutionality or validity by a court of competent jurisdiction, the outcome of such challenge shall not affect or invalidate the remainder of the conditions or requirements in that permit. [District Rule 2520, 9.7] Federally Enforceable Through Title V Permit
13. It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of the permit. [District Rule 2520, 9.8.2] Federally Enforceable Through Title V Permit
14. The permit may be modified, revoked, reopened and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition. [District Rule 2520, 9.8.3] Federally Enforceable Through Title V Permit
15. The permit does not convey any property rights of any sort, or any exclusive privilege. [District Rule 2520, 9.8.4] Federally Enforceable Through Title V Permit
16. The Permittee shall furnish to the District, within a reasonable time, any information that the District may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit or to determine compliance with the permit. Upon request, the permittee shall also furnish to the District copies of records required to be kept by the permit or, for information claimed to be confidential, the permittee may furnish such records directly to EPA along with a claim of confidentiality. [District Rule 2520, 9.8.5] Federally Enforceable Through Title V Permit
17. The permittee shall pay annual permit fees and other applicable fees as prescribed in Regulation III of the District Rules and Regulations. [District Rule 2520, 9.9] Federally Enforceable Through Title V Permit
18. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to enter the permittee's premises where a permitted source is located or emissions related activity is conducted, or where records must be kept under condition of the permit. [District Rule 2520, 9.13.2.1] Federally Enforceable Through Title V Permit
19. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to have access to and copy, at reasonable times, any records that must be kept under the conditions of the permit. [District Rule 2520, 9.13.2.2] Federally Enforceable Through Title V Permit
20. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to inspect at reasonable times any facilities, equipment, practices, or operations regulated or required under the permit. [District Rule 2520, 9.13.2.3] Federally Enforceable Through Title V Permit
21. Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to sample or monitor, at reasonable times, substances or parameters for the purpose of assuring compliance with the permit or applicable requirements. [District Rule 2520, 9.13.2.4] Federally Enforceable Through Title V Permit
22. No air contaminants shall be discharged into the atmosphere for a period or periods aggregating more than 3 minutes in any one hour which is as dark or darker than Ringelmann #1 or equivalent to 20% opacity and greater, unless specifically exempted by District Rule 4101 (2/17/05). If the equipment or operation is subject to a more stringent visible emission standard as prescribed in a permit condition, the more stringent visible emission limit shall supersede this condition. [District Rule 4101] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

23. No person shall manufacture, blend, repackage, supply, sell, solicit or apply any architectural coating with a VOC content in excess of the corresponding limit specified in the Table of Standards of District Rule 4601 (12/17/09) for use or sale within the District. [District Rule 4601, 5.1] Federally Enforceable Through Title V Permit
24. All VOC-containing materials for architectural coatings subject to Rule 4601 (12/17/09) shall be stored in closed containers when not in use. [District Rule 4601, 5.4] Federally Enforceable Through Title V Permit
25. The permittee shall comply with all the Labeling and Test Methods requirements outlined in Rule 4601 sections 6.1 and 6.3 (12/17/09). [District Rule 4601, 6.1 and 6.3] Federally Enforceable Through Title V Permit
26. With each report or document submitted under a permit requirement or a request for information by the District or EPA, the permittee shall include a certification of truth, accuracy, and completeness by a responsible official. [District Rule 2520, 9.13.1 and 10.0] Federally Enforceable Through Title V Permit
27. If the permittee performs maintenance on, or services, repairs, or disposes of appliances, the permittee shall comply with the standards for Recycling and Emissions Reduction pursuant to 40 CFR 82, Subpart F. [40 CFR 82 Subpart F] Federally Enforceable Through Title V Permit
28. If the permittee performs service on motor vehicles when this service involves the ozone-depleting refrigerant in the motor vehicle air conditioner (MVAC), the permittee shall comply with the standards for Servicing of Motor Vehicle Air Conditioners pursuant to all the applicable requirements as specified in 40 CFR 82, Subpart B. [40 CFR 82, Subpart B] Federally Enforceable Through Title V Permit
29. Disturbances of soil related to any construction, demolition, excavation, extraction, or other earthmoving activities shall comply with the requirements for fugitive dust control in District Rule 8021 unless specifically exempted under Section 4.0 of Rule 8021 (8/19/04) or Rule 8011 (8/19/04). [District Rule 8021 and 8011] Federally Enforceable Through Title V Permit
30. Outdoor handling, storage and transport of any bulk material which emits dust shall comply with the requirements of District Rule 8031, unless specifically exempted under Section 4.0 of Rule 8031 (8/19/04) or Rule 8011 (8/19/04). [District Rule 8031 and 8011] Federally Enforceable Through Title V Permit
31. An owner/operator shall prevent or cleanup any carryout or trackout in accordance with the requirements of District Rule 8041 Section 5.0, unless specifically exempted under Section 4.0 of Rule 8041 (8/19/04) or Rule 8011 (8/19/04). [District Rule 8041 and 8011] Federally Enforceable Through Title V Permit
32. Whenever open areas are disturbed or vehicles are used in open areas, the facility shall comply with the requirements of Section 5.0 of District Rule 8051, unless specifically exempted under Section 4.0 of Rule 8051 (8/19/04) or Rule 8011 (8/19/04). [District Rule 8051 and 8011] Federally Enforceable Through Title V Permit
33. Any paved road or unpaved road shall comply with the requirements of District Rule 8061 unless specifically exempted under Section 4.0 of Rule 8061 (8/19/04) or Rule 8011 (8/19/04). [District Rule 8061 and Rule 8011] Federally Enforceable Through Title V Permit
34. Any unpaved vehicle/equipment area that anticipates more than 75 vehicle trips per day shall comply with the requirements of Section 5.1.1 of District Rule 8071. Any unpaved vehicle/equipment area that anticipates more than 100 vehicle trips per day shall comply with the requirements of Section 5.1.2 of District Rule 8071. All sources shall comply with the requirements of Section 5.0 of District Rule 8071 unless specifically exempted under Section 4.0 of Rule 8071 (9/16/04) or Rule 8011 (8/19/04). [District Rule 8071 and Rule 8011] Federally Enforceable Through Title V Permit
35. Any owner or operator of a demolition or renovation activity, as defined in 40 CFR 61.141, shall comply with the applicable inspection, notification, removal, and disposal procedures for asbestos containing materials as specified in 40 CFR 61.145 (Standard for Demolition and Renovation). [40 CFR 61 Subpart M] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

36. The permittee shall submit certifications of compliance with the terms and standards contained in Title V permits, including emission limits, standards and work practices, to the District and the EPA annually (or more frequently as specified in an applicable requirement or as specified by the District). The certification shall include the identification of each permit term or condition, the compliance status, whether compliance was continuous or intermittent, the methods used for determining the compliance status, and any other facts required by the District to determine the compliance status of the source. [District Rule 2520, 9.16] Federally Enforceable Through Title V Permit
37. The permittee shall submit an application for Title V permit renewal to the District at least six months, but not greater than 18 months, prior to the permit expiration date. [District Rule 2520, 5.2] Federally Enforceable Through Title V Permit
38. When a term is not defined in a Title V permit condition, the definition in the rule cited as the origin and authority for the condition in a Title V permits shall apply. [District Rule 2520, 9.1.1] Federally Enforceable Through Title V Permit
39. Compliance with permit conditions in the Title V permit shall be deemed in compliance with the following outdated SIP requirements: Rule 401 (Madera, Fresno, Kern, Kings, San Joaquin, Stanislaus, Tulare and Merced), Rule 110 (Fresno, Stanislaus, San Joaquin), Rule 109 (Merced), Rule 113 (Madera), and Rule 111 (Kern, Tulare, Kings). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
40. Compliance with permit conditions in the Title V permit shall be deemed in compliance with the following applicable requirements: SJVUAPCD Rules 1100, sections 6.1 and 7.0 (12/17/92); 2010, sections 3.0 and 4.0 (12/17/92); 2031 (12/17/92); 2040 (12/17/92); 2070, section 7.0 (12/17/92); 2080 (12/17/92); 4101 (2/17/05); 4601, sections 5.1, 5.2, 5.3, 5.8 and 8.0 (12/17/09); 8021 (8/19/04); 8031 (8/19/04); 8041 (8/19/04); 8051 (8/19/04); 8061 (8/19/04); and 8071 (9/16/04). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
41. The reporting periods for the Report of Required Monitoring and the Compliance Certification Report begin November 1 of every year, unless alternative dates are approved by the District Compliance Division. These reports are due within 30 days after the end of the reporting period. [District Rule 2520] Federally Enforceable Through Title V Permit
42. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
43. Operator shall achieve Required Annual Emissions Reductions (RAER) equal to at least 35% of the winery's Baseline Fermentation Emissions (BFE). [District Rule 4694, 5.1]
44. A Three-Year Compliance Plan that demonstrates compliance with the requirements of Section 5.1 of District Rule 4694 for each year of the applicable compliance period shall be submitted to the District by no later than December 1, 2006, and every three years thereafter on or before December 1. [District Rule 4694]
45. A Three-Year Compliance Plan Verification that demonstrates that the Three-Year Compliance Plan elements are in effect shall be submitted to the District by no later than July 1, 2007, and every three years thereafter on or before July 1 [District Rule 4694]
46. An Annual Compliance Plan Demonstration that shows compliance with the applicable requirements of this rule shall be submitted to the District by no later than February 1, 2008, and every year thereafter on or before February 1. [District Rule 4694]
47. Operators using CER to mitigate fermentation emissions shall perform all monitoring and recordkeeping, as established in their approved Three-Year Compliance Plan, and shall maintain all records necessary to demonstrate compliance. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-1-3

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

244 BHP CUMMINS MODEL 6BTA-5.9 DIESEL-FIRED EMERGENCY IC ENGINE POWERING A FIREWATER PUMP

PERMIT UNIT REQUIREMENTS

1. Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201, 3.1] Federally Enforceable Through Title V Permit
2. This engine shall be equipped with an operational non-resettable elapsed time meter or other APCO approved alternative. [District Rule 4702] Federally Enforceable Through Title V Permit
3. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rule 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
4. Only CARB certified diesel fuel containing not more than 0.0015% sulfur by weight is to be used. [District NSR Rule, 4801, and 17 CCR 93115] Federally Enforceable Through Title V Permit
5. The permittee shall maintain monthly records of emergency and non-emergency operation. Records shall include the number of hours of emergency operation, the date and number of hours of all testing and maintenance operations, and the purpose of the operation (for example: load testing, weekly testing, rolling blackout, general area power outage, etc.). For units with automated testing systems, the operator may, as an alternative to keeping records of actual operation for testing purposes, maintain a readily accessible written record of the automated testing schedule. [District Rule 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
6. This engine shall be operated only for maintenance, testing, and required regulatory purposes, and during emergency situations. For testing purposes, the engine shall only be operated the number of hours necessary to comply with the testing requirements of the National Fire Protection Association (NFPA) 25 - "Standard for the Inspection, Testing, and Maintenance of Water-Based Fire Protection Systems", 1998 edition. Total hours of operation for all maintenance, testing, and required regulatory purposes shall not exceed 66 hours per calendar year. [District NSR Rule, 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
7. The permittee shall maintain monthly records of the type of fuel purchased, the amount of fuel purchased, date when the fuel was purchased, signature of the permittee who received the fuel, and signature of the fuel supplier indicating that the fuel was delivered. [17 CCR 93115]
8. This engine shall not be operated for maintenance and testing purposes between 7:30 a.m. and 3:30 p.m. on days when school is in session. [17 CCR 93115]
9. Compliance with permit conditions in the Title V permit shall be deemed compliance with the subsumed San Joaquin County Rule 407 requirements. A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
10. This engine shall be equipped with either a positive crankcase ventilation (PCV) system that recirculates crankcase emissions into the air intake system for combustion, or a crankcase emissions control device of at least 90% control efficiency. [District NSR Rule] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

11. The exhaust stack shall vent vertically upward. The vertical exhaust flow shall not be impeded by a rain cap (flapper ok), roof overhang, or any other obstruction. [District Rule 4102]
12. NOx emissions shall not exceed 6.63 g/hp-hr. [District NSR Rule] Federally Enforceable Through Title V Permit
13. The PM10 emissions rate shall not exceed 0.25 g/hp-hr based on US EPA certification using ISO 8178 test procedure. [District NSR Rule] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-2-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 24

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-3-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 25

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-4-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 19

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-5-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 20

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-6-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 22

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-7-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 23

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-8-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 18

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-9-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 21

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-10-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

27,900 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 15

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-11-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

27,900 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 16

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-12-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

28,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 17

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-13-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

28,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 14

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-14-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 101

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-15-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 102

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-16-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 103

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-17-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 104

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-18-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 105

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-19-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 106

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-20-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 107

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-21-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 108

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-22-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

33,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 128

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-23-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 109

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-24-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

35,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 126

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-25-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

35,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 129

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]



These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-26-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

35,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 131

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-27-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

35,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 132

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-28-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 110

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-29-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 111

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-30-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 112

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-31-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 113

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-32-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 114

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-33-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 115

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-34-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 116

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-35-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 117

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-36-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 118

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-37-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 119

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-38-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 120

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-39-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 121

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-40-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 122

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-41-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 123

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-42-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 124

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-43-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 125

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-44-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

34,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 127

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-45-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

35,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 130

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-46-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

35,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 133

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-47-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,100 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 11

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-48-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 60

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-49-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,300 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 9

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-50-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 10

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-51-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 12

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-52-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 64

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-53-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 65

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-54-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 8

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-55-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 34

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-56-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 62

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-57-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 63

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-58-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 2

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-59-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 4

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-60-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 6

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-61-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 7

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-62-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 13

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-63-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 3

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-64-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 30

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-65-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 47

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-66-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 59

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-67-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 26

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-68-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 29

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-69-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,800 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 33

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-70-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,600 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 44

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-71-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 1

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-72-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,900 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 32

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-73-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 37

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-74-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 43

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-75-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 48

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-76-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,800 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 61

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-77-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,800 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 28

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-78-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 38

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-79-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,800 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 45

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-80-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 58

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-81-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,900 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 66

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-82-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,800 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 5

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-83-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 46

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-84-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 31

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-85-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,100 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 35

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-86-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,200 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 27

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-87-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,400 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 36

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-88-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

62,500 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 42

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-89-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

62,800 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 41

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-90-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

63,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 40

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-91-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

63,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 39

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-92-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

123,000 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 68

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-93-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

123,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 70

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-94-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

122,900 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 67

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: N-4939-95-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

123,700 GALLON CONCRETE OPEN TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 69

PERMIT UNIT REQUIREMENTS

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emissions reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
2. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-96-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

355,200 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 92 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-97-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

355,200 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 93 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-98-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

5,900 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 134 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-99-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 217 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-100-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 218 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-101-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 219 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-102-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 220 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-103-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 229 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-104-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 230 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-105-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 231 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-106-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 232 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-107-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 198 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-108-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 199 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-109-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 200 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-110-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 233 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-111-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 234 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-112-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

7,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 235 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-113-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 365 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-114-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 366 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-115-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 367 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-116-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 368 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-117-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 369 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-118-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 370 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-119-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 371 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-120-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,100 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 372 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-121-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 207 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-122-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 208 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-123-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 209 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-124-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

10,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 210 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-125-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 236 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-126-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 237 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-127-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 238 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-128-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 239 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-129-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 240 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-130-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 241 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-131-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 242 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-132-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 243 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-133-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 221 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-134-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 222 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-135-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 223 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-136-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 224 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-137-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 225 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-138-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 226 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-139-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 227 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-140-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

14,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 228 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-141-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 361 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-142-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 362 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-143-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 363 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-144-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 364 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-145-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 373 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-146-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 374 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-147-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 375 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-148-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,400 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 376 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-149-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,500 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 205 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-150-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,500 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 206 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-151-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,500 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 211 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-152-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

20,500 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 212 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-153-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 201 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-154-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 202 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-155-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 203 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-156-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 204 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-157-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 213 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-158-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 214 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-159-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 215 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-160-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,300 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 216 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-161-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 426 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-162-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 427 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-163-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 428 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-164-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 429 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-165-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 430 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-166-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 431 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-167-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 432 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-168-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 433 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-169-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 434 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-170-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

31,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 435 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-171-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 347 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-172-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 348 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-173-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 349 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-174-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 350 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-175-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 351 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-176-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 352 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-177-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 353 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-178-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 354 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-179-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 355 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-180-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 356 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-181-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 357 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-182-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 358 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-183-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 359 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-184-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 360 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-185-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 377 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-186-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 378 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-187-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 379 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-188-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

41,000 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 380 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-189-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,200 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 49 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-190-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,200 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 50 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-191-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,800 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 71 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-192-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,800 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 72 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-193-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,800 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 73 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-194-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,800 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 74 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-195-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,800 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 75 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-196-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 436 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-197-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 437 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-198-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 438 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-199-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 439 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-200-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 440 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-201-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 441 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-202-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 442 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-203-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

59,700 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 443 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-204-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 381 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-205-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 382 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-206-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 383 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-207-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 384 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-208-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 385 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-209-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 386 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-210-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 387 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-211-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 388 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-212-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 389 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-213-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 390 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-214-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 391 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-215-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 392 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-216-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 393 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-217-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 394 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-218-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 395 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-219-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 396 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-220-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 397 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-221-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 398 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-222-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 399 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-223-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 401 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-224-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 402 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-225-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 403 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-226-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 404 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: N-4939-227-1

EXPIRATION DATE: 08/31/2014

EQUIPMENT DESCRIPTION:

60,600 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 405 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When storing wine, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694, 5.2.1]
2. When this tank is used for storing wine, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694, 5.2.1]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694, 5.2.2]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, uncontrolled fermentation emissions, and fermentation emission reductions. The information shall be recorded by the tank Permit To Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694, 6.4.1]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694, 6.4.2]

These terms and conditions are part of the Facility-wide Permit to Operate.