



**San Joaquin Valley**  
**AIR POLLUTION CONTROL DISTRICT**

APR 28 2010

Gerardo C. Rios, Chief  
Permits Office (AIR-3)  
U.S. EPA - Region IX  
75 Hawthorne St  
San Francisco, CA 94105

**Re: Notice of Preliminary Decision - Federally Mandated Operating Permit  
District Facility # C-629  
Project # C-1073955**


Dear Mr. Rios:

Enclosed for your review and comment is the District's analysis of O'Neill Beverages Co LLC's application for the Federally Mandated Operating Permit for its winery located at 8417 S Lac Jac Ave in Parlier, California.

The notice of preliminary decision for this project will be published approximately three days from the date of this letter. Please submit your written comments on this project within the 45-day comment period which begins on the date of publication of the public notice.

Thank you for your cooperation in this matter. If you have any questions regarding this matter, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

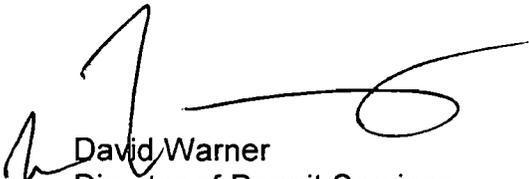

David Warner  
Director of Permit Services

cc: Jerry Sandhu, Permit Services Engineer

Attachments

**Seyed Sadredin**  
Executive Director/Air Pollution Control Officer

---

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061  
[www.valleyair.org](http://www.valleyair.org)

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: (661) 392-5500 FAX: (661) 392-5585



# San Joaquin Valley

AIR POLLUTION CONTROL DISTRICT

APR 28 2010

Mike Tollstrup, Chief  
Project Assessment Branch  
Air Resources Board  
P O Box 2815  
Sacramento, CA 95812-2815

**Re: Notice of Preliminary Decision - Federally Mandated Operating Permit  
District Facility # C-629  
Project # C-1073955**

Dear Mr. Tollstrup:

Enclosed for your review and comment is the District's analysis of O'Neill Beverages Co LLC's application for the Federally Mandated Operating Permit for its winery located at 8417 S Lac Jac Ave in Parlier, California.

The notice of preliminary decision for this project will be published approximately three days from the date of this letter. Please submit your written comments on this project within the 30-day comment period which begins on the date of publication of the public notice.

Thank you for your cooperation in this matter. If you have any questions regarding this matter, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

 David Warner  
Director of Permit Services

cc: Jerry Sandhu, Permit Services Engineer

Attachments

**Seyed Sadredin**

Executive Director/Air Pollution Control Officer

---

**Northern Region**

4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**

1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061  
[www.valleyair.org](http://www.valleyair.org)

**Southern Region**

34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: (661) 392-5500 FAX: (661) 392-5585



**San Joaquin Valley**  
**AIR POLLUTION CONTROL DISTRICT**

APR 28 2010

Matthew Towers  
O'Neill Beverages Co LLC  
8418 S Lac Jac Ave  
Parlier, CA 93648-9708

**Re: Notice of Preliminary Decision - Federally Mandated Operating Permit  
District Facility # C-629  
Project # C-1073955**

Dear Mr. Towers:

Enclosed for your review and comment is the District's analysis of O'Neill Beverages Co LLC's application for the Federally Mandated Operating Permit for its winery located at 8417 S Lac Jac Ave in Parlier, California.

The notice of preliminary decision for this project will be published approximately three days from the date of this letter. Please submit your written comments on this project within the 30-day comment period which begins on the date of publication of the public notice.

Thank you for your cooperation in this matter. If you have any questions regarding this matter, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900.

Sincerely,

David Warner  
Director of Permit Services

cc: Jerry Sandhu, Permit Services Engineer

Attachments

**Seyed Sadredin**

Executive Director/Air Pollution Control Officer

---

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061  
[www.valleyair.org](http://www.valleyair.org)

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: (661) 392-5500 FAX: (661) 392-5585

Fresno Bee

**NOTICE OF PRELIMINARY DECISION  
FOR THE PROPOSED ISSUANCE OF  
FEDERALLY MANDATED OPERATING PERMITS**

NOTICE IS HEREBY GIVEN that the San Joaquin Valley Air Pollution Control District solicits public comment on the proposed issuance of the Federally Mandated Operating permits to O'Neill Beverages Co LLC for its winery located at 8417 S Lac Jac Ave in Parlier, California.

The District's analysis of the legal and factual basis for this proposed action, project #C-1073955, is available for public inspection at [http://www.valleyair.org/notices/public\\_notices\\_idx.htm](http://www.valleyair.org/notices/public_notices_idx.htm) and the District office at the address below. There are no emissions changes associated with this proposed action. This will be the public's only opportunity to comment on the specific conditions of the proposed Federally Mandated Operating initial permits. If requested by the public, the District will hold a public hearing regarding issuance of this initial permit. For additional information, please contact Mr. Jim Swaney, Permit Services Manager, at (559) 230-5900. Written comments on the proposed initial permit must be submitted within 30 days of the publication date of this notice to DAVID WARNER, DIRECTOR OF PERMIT SERVICES, SAN JOAQUIN VALLEY AIR POLLUTION CONTROL DISTRICT, 1990 E. GETTYSBURG AVE, FRESNO, CALIFORNIA 93726-0244.

**SAN JOAQUIN VALLEY  
UNIFIED AIR POLLUTION CONTROL DISTRICT**

**O'Neill Beverages Co LLC**

**PROPOSED ENGINEERING EVALUATION  
TABLE OF CONTENTS**

<b>SECTION</b>	<b>PAGE</b>
<b>I. PROPOSAL</b>	<b>1</b>
<b>II. FACILITY LOCATION</b>	<b>1</b>
<b>III. EQUIPMENT LISTING</b>	<b>1</b>
<b>IV. GENERAL PERMIT TEMPLATE USAGE</b>	<b>2</b>
<b>V. SCOPE OF EPA AND PUBLIC REVIEW</b>	<b>2</b>
<b>VI. APPLICABLE REQUIREMENTS ADDRESSED BY A GENERAL PERMIT TEMPLATE</b>	<b>3</b>
<b>VII. APPLICABLE REQUIREMENTS NOT ADDRESSED BY A GENERAL PERMIT TEMPLATE</b>	<b>3</b>
<b>VIII. REQUIREMENTS NOT FEDERALLY ENFORCEABLE</b>	<b>4</b>
<b>IX. COMPLIANCE</b>	<b>7</b>
<b>X. PERMIT SHIELD</b>	<b>31</b>
<b>XI. PERMIT CONDITIONS</b>	<b>31</b>

**ATTACHMENT A - DETAILED FACILITY REPORT**

**ATTACHMENT B - EXEMPT EQUIPMENT**

**ATTACHMENT C - CURRENT PERMITS TO OPERATE**

**ATTACHMENT D - TEMPLATE QUALIFICATION FORM**

**ATTACHMENT E - TEMPLATE RULE UPDATE COMPARISON**

**ATTACHMENT F - CURRENT DISTRICT RULE SIP COMPARISON**

# INITIAL TITLE V PERMIT APPLICATION REVIEW

Project #: C-1073955  
Deemed Complete: October 29, 2007

Engineer: Jerry Sandhu  
Date: April 26, 2010

Facility Number: C-629  
Facility Name: O'Neill Beverages Co LLC  
Mailing Address: 8418 S Lac Jac Ave  
Parlier, CA 93648-9708

Contact Name: Matthew Towers  
Phone: (559) 638-3544

Responsible Official: Matthew Towers  
Title: VP Strategic Planning and General Manager

## I. PROPOSAL

O'Neill Beverages Co LLC is proposing that an initial Title V permit be issued for its existing wine production facility located in Parlier, CA. The purpose of this evaluation is to identify all applicable requirements, determine if the facility will comply with those applicable requirements, and to provide the legal and factual basis for proposed permit conditions.

## II. FACILITY LOCATION

O'Neill Beverages Co LLC is located at 8418 S Lac Jac Ave in Parlier, CA.

## III. EQUIPMENT LISTING

A detailed facility printout listing all permitted equipment at the facility is shown in Attachment A.

A summary of the exempt equipment categories, which describe the insignificant activities or equipment at the facility not requiring a permit, is shown in Attachment B. This equipment is not exempt from facility-wide requirements.

#### **IV. GENERAL PERMIT TEMPLATE USAGE**

The applicant is requesting to use the following model general permit templates:

A. Facility wide SJV-UM-0-2

The applicant has requested to utilize template #SJV-UM-0-2 for the facility-wide requirements. Based on the information submitted on the Template Qualification Form (Attachment D), the applicant qualifies for the use of this template.

B. Boiler SJV-BSG-9-1

The applicant has requested to utilize template # SJV-BSG-9-1 for unit C-629-2-6. However, this template is currently outdated and does not include all the requirements applicable to boilers. It will therefore not be used.

C. Emergency Standby IC Engine SJV-IC-1-1

The applicant has requested to utilize template # SJV-IC-1-1 for units C-629-4-0, -5-0, and -6-0. However, this template is currently outdated and does not include all the requirements applicable to emergency IC engines. It will therefore not be used.

#### **V. SCOPE OF EPA AND PUBLIC REVIEW**

Certain segments of the proposed Operating Permit are based on model general permit templates that have been previously subject to EPA and public review. The terms and conditions from the model general permit templates are included in the proposed permit and are not subject to further EPA and public review.

For permit applications utilizing model general permit templates, public and agency comments on the District's proposed actions are limited to the applicant's eligibility for model general permit template, applicable requirements not covered by the model general permit template, and the applicable procedural requirements for issuance of Title V Operating Permits.

The following permit conditions, including their underlying applicable requirements, originate from model general permit templates and are not subject to further EPA or public review:

- Conditions 1-41 of the requirements for permit unit C-629-0-1.

## **VI. APPLICABLE REQUIREMENTS ADDRESSED BY GENERAL PERMIT TEMPLATES**

- District Rule 1100, Equipment Breakdown (amended December 17, 1992)
- District Rule 1160, Emission Statements (adopted November 18, 1992)
- District Rule 2010, Permits Required (amended December 17, 1992)
- District Rule 2020, Exemptions (amended December 20, 2007)
- District Rule 2031, Transfer of Permits (adopted December 17, 1992)
- District Rule 2040, Applications (amended December 17, 1992)
- District Rule 2070, Standards for Granting Applications (adopted December 17, 1992)
- District Rule 2080, Conditional Approval (amended December 17, 1992)
- District Rule 2520, Federally Mandated Operating Permits [sections 5.2, 9.1.1, 9.4, 9.5, 9.7, 9.8, 9.9, 9.13.1, 9.13.2, 9.16 and 10.0], (amended June 21, 2001)
- District Rule 4101, Visible Emissions (amended February 17, 2005)
- District Rule 4601, Architectural Coatings (amended December 17, 2009)
- District Rule 8021, Construction, Demolition, Excavation, Extraction and Other Earthmoving Activities (amended August 19, 2004)
- District Rule 8031, Bulk Materials (amended August 19, 2004)
- District Rule 8041, Carryout and Trackout (amended August 19, 2004)
- District Rule 8051, Open Areas (amended August 19, 2004)
- District Rule 8061, Paved and Unpaved Roads (amended August 19, 2004)
- District Rule 8071, Unpaved Vehicle/Equipment Traffic Areas (amended September 16, 2004)
- 40 CFR Part 82, Subpart B and F, Stratospheric Ozone
- 40 CFR Part 61, Subpart M, National Emission Standard for Asbestos

## **VII. APPLICABLE REQUIREMENTS NOT ADDRESSED BY GENERAL PERMIT TEMPLATES**

- District Rule 1080, Stack Monitoring (amended December 17, 1992)
- District Rule 1081, Source Sampling (amended December 16, 1993)
- District Rule 2201, New and Modified Stationary Source Review Rule (amended September 21, 2006)

- District Rule 2520, Federally Mandate Operating Permits (amended June 21, 2001)
- District Rule 4201, Particulate Matter Concentration (amended December 17, 1992)
- District Rule 4301, Fuel Burning Equipment (amended December 17, 1992)
- District Rule 4351, Boilers, Steam Generators and Process Heaters – Phase 1 (amended August 21, 2003)
- District Rule 4305, Boilers, Steam Generators and Process Heaters – Phase 2 (amended August 21, 2003)
- District Rule 4306, Boilers, Steam Generators and Process Heaters – Phase 3 (amended March 17, 2005)
- District Rule 4702, Internal Combustion Engines – Phase 2, (amended January 18, 2007)
- 40 CFR 60 Subpart IIII – Standards of Performance for Stationary Compression Ignition Internal Combustion Engines
- 40 CFR Part 63, Subpart ZZZZ, National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines (amended January 18, 2008)
- 40 CFR Part 64, Compliance Assurance Monitoring (CAM)

## VIII. REQUIREMENTS NOT FEDERALLY ENFORCEABLE

For each Title V source, the District issues a single permit that contains the Federally Enforceable requirements, as well as the District-only requirements. The District-only requirements are not a part of the Title V Operating Permits. The terms and conditions that are part of the facility's Title V permit are designated as Federally Enforceable Through Title V Permit.

This facility is subject to the following rules that are not currently federally enforceable:

1. District Rule 1070, Inspections (amended December 17, 1992)

Condition 21 of the requirements for current PTO -2-6 has been included as condition 23 of the requirements of permit unit -2-7, and it is based on District Rule 1070 (which has not yet been approved into the State Implementation Plan (SIP)), and District Rules 2520, 4305, and 4306. Although District Rule 1070 is not SIP approved, District Rules 4305 and

4306 are. Therefore, Condition 23 is a federally enforceable requirement.

2. District Rule 4102, Nuisance (amended December 17, 1992)

For this facility, condition 42 of the requirements for permit unit C-629-0-1 is based on District Rule 4102 and is not federally enforceable through Title V.

3. District Rule 4320, Advanced Emission Reduction Options For Boilers, Steam Generators, and Process Heaters Greater Than 5.0 MMBtu/hr, (adopted October 16, 2008)

The purpose of this rule is to limit emissions of oxides of nitrogen (NO<sub>x</sub>), carbon monoxide (CO), oxides of sulfur (SO<sub>2</sub>), and particulate matter 10 microns or less (PM<sub>10</sub>) from boilers, steam generators, and process heaters.

The rule was adopted on October 16, 2008 and has not yet been approved into the State Implementation Plan (SIP). In addition, the deadline to meet compliance with the requirements of this rule has not yet passed. Therefore, the boiler in this project is not currently subject to the requirements of this rule, and the requirements of this rule will not be addressed in this evaluation.

4. District Rule 4694, Wine Fermentation and Storage Tanks (adopted December 15, 2005)

The purpose of this rule is to reduce emissions of volatile organic compounds (VOC) from the fermentation and bulk storage of wine, or achieve equivalent reductions from alternative emission sources. The rule is applicable to any facility with VOC emissions in excess of 10 tons per year. For those facilities to which the rule applies, the requirements of the rule are applicable to any fermentation or storage tank with capacity in excess of 5,000 gallons. The rule was adopted on December 15, 2005 and has not yet been approved into the State Implementation Plan (SIP).

**a. C-629-0-1: FACILITY-WIDE REQUIREMENTS**

Conditions 43 through 46 of the facility-wide requirements are based on District Rule 4694 and are therefore not federally enforceable.

- b. C-629-11-1 through -13-1, -24-1 through -29-1, -40-1 through -45-1, -54-1 through -135-1, -139-1 through -141-1, -238-1 through -239-1, and -284-3 through -320-3: STEEL WINE STORAGE TANKS**

Conditions 1 through 5 of the permit requirements for each of the listed emission units are based on District Rule 4694 and are therefore not federally enforceable.

- c. C-629-30-1, -31-1: IRON COATED WINE STORAGE TANKS**

Conditions 1 through 5 of the permit requirements for each of the listed emission units are based on District Rule 4694 and are therefore not federally enforceable.

- d. C-629-144-1 through -191-1: CONCRETE WINE FERMENTATION AND STORAGE TANKS**

Conditions 1 through 4 of the permit requirements for each of the listed emission units are based on District Rule 4694 and are therefore not federally enforceable.

- e. C-629-192-1 through -237-1, -240-1 through -254-1, -264-1 through -279-1: STEEL WINE FERMENTATION AND STORAGE TANKS**

Conditions 1 through 6 of the permit requirements for each of the listed emission units are based on District Rule 4694 and are therefore not federally enforceable.

- f. C-629-255-1 through -263-1: CONCRETE WINE STORAGE TANKS**

Conditions 1 through 3 of the permit requirements for each of the listed emission units are based on District Rule 4694 and are therefore not federally enforceable.

- g. C-629-280-1 and -281-1 : PLASTIC WINE STORAGE TANKS**

Conditions 1 through 5 of the permit requirements for each of the listed emission units are based on District Rule 4694 and are therefore not federally enforceable.

5. District Rule 4801, Sulfur Compounds, (amended December 17, 1992)

The purpose of this rule is to limit emissions of sulfur compounds. Condition 2 of the requirements for permit units C-629-4-1, -5-1, and -6-1 is based on District Rule 4801, which is not yet SIP approved, as well as District Rule 2201 and 17 CCR 93115. Although District Rule 4801 is not SIP approved, District Rule 2201 is. Therefore, Condition 2 on these permit units is a federally enforceable requirement.

## **IX. COMPLIANCE**

### **A. Requirements Addressed by Model General Permit Templates**

#### **1. Facility-Wide Requirements**

The applicant is proposing to use a general permit template to address federally applicable facility-wide requirements. Section IV of template SJV-UM-0-2 includes a demonstration of compliance for all applicable requirements.

Template conditions have been added to the facility wide requirements as condition numbers 1 through 22, 26 through 28, and 35 through 41 to assure compliance with these requirements.

The current version of template SJV-UM-0-2 does not address the requirements from the latest versions of District Rules 8011, 8021, 8031, 8041, 8051, 8061 (amended 8/19/04), and 8071 (amended 9/16/04). The latest versions of these rules are included in the State Implementation Plan (SIP). Conditions 29 through 34 on the facility-wide permit (C-581-0-1) demonstrate compliance with the requirements of the latest versions of these rules. A comparison of the changes from the old versions of the rules to the latest versions of the rules is included in Attachment E.

The current version of template SJV-UM-0-2 does not address the requirements from the latest version of District Rule 4601 (amended 12/17/09). The latest version of District Rule 4601 (amended 12/17/09) has not been SIP approved. Attachment F contains the streamlining of the SIP approved District Rule 4601 (10/31/01) to the current District Rule 4601 to show the current rule is as stringent if not more than the SIP approved version. Conditions 23 through 25 on the facility-wide permit (C-581-0-1) demonstrate compliance with the requirements of the latest version of this rule.

## **B. Requirements Not Addressed by Model General Permit Templates**

### **1. District Rule 1080, Stack Monitoring**

This rule grants the APCO authority to request the installation, use maintenance, and inspection of continuous monitoring equipment. This rule also specifies the performance standards for the equipment and administrative recordkeeping, reporting, and violation and equipment breakdown notification requirements.

Units C-629-282-2 and -283-2 are the only units subject to this rule.

- a. **C-629-282-2 and -283-2:** 66,000 BARREL CAPACITY BRANDY STORAGE AND AGING OPERATION SERVED BY A 0.289 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 1.0 RTO95 REGENERATIVE THERMAL OXIDIZER AND A 1.7 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 6.0 RTO95 REGENERATIVE THERMAL OXIDIZER

Section 5.0 requires that, upon request, the owner or operator shall provide, properly install, and maintain in good working order and in operation, continuous monitoring systems to measure various pollutants or opacity.

- Conditions 16, 17, 22, and 24 of the requirements for permit units - 282-2 and -283-2 ensure compliance with these requirements.

### **2. District Rule 1081, Source Sampling**

This rule ensures that any source operation which emits or may emit air contaminants provides adequate and safe facilities for use in sampling to determine compliance. This rule also specifies methods and procedures for source testing, sample collection, and compliance determination.

Units C-629-2-7, -282-2, and -283-2 are the only units subject to this rule.

- a. **C-629-2-7:** 47.8 MMBTU/HR BABCOCK AND WILCOX NATURAL GAS-FIRED BOILER (SERIAL #NB21232) WITH AN AMERICAN COMBUSTION TECH MODEL ACI-04G LOW NOX BURNER WITH INDUCED FLUE GAS RECIRCULATION
- b. **C-629-282-2 and -283-2:** 66,000 BARREL CAPACITY BRANDY STORAGE AND AGING OPERATION SERVED BY A 0.289 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 1.0 RTO95

REGENERATIVE THERMAL OXIDIZER AND A 1.7 MMBTU/HR  
ADWEST TECHNOLOGIES MODEL RETOX 6.0 RTO95  
REGENERATIVE THERMAL OXIDIZER

Section 5.0 lists the acceptable source test method standards if the test method is not already specified in the rule. The test methods for the three units are already specified under other applicable rules.

- Condition 15 from current PTO -2-6 and condition 35 on current PTOs -282-3 and -283-3 have been included as federally enforceable condition 14 of the requirements for permit unit -2-7 and condition 35 of the requirements for permit units -282-2 and -283-2, respectively.

Section 6.1 states that for the purposes of determining compliance with an applicable standard or numerical limitation, the arithmetic mean of three test runs shall apply, unless two of the three results are above the applicable limit. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit.

- Condition 19 from current PTO -2-6 and condition 35 on current PTOs -282-3 and -283-3 have been included as federally enforceable condition 19 of the requirements for permit unit -2-7 and condition 35 of the requirements for permit units -282-2 and -283-2, respectively.

Section 6.2 states that a scheduled source test may not be discontinued solely due to the failure of one or more runs to meet applicable standards.

- Federally enforceable condition 18 has been added to the requirements for permit unit -2-7. Federally enforceable condition 36 has been added to the requirements for permit units -282-2 and -283-2.

Section 6.3 states that in the event that a sample is accidentally lost or conditions occur in which one of three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sampling train, extreme meteorological conditions presenting a hazard to the sampling team, or other circumstances beyond the owner or operators control, upon the APCO's approval, compliance may be determined using the arithmetic mean of the other two runs.

- Federally enforceable condition 20 has been added to the requirements for permit unit -2-7. Federally enforceable condition 37 has been added to the requirements for permit units -282-2 and -283-2.

Section 7.1 states that the District must be notified 30 days prior to any compliance source testing and the owner shall submit a source test plan for District approval 15 days prior to source sampling.

- Condition 15 from current PTO -2-6 and condition 32 on current PTOs -282-3 and -283-3 have been included as federally enforceable condition 14 of the requirements for permit unit -2-7 and condition 32 of the requirements for permit units -282-2 and -283-2.

Section 7.2 states that source sampling to determine the compliance status of an emissions source shall be witnessed or authorized by District personnel.

- Federally enforceable condition 21 has been added to the requirements for permit unit -2-7. Federally enforceable condition 38 has been added to the requirements for permit units -282-2 and -283-2.

Section 7.3 states that source test reports must be submitted to the District within 60 days of completion of field testing. Source tests must be submitted for all District authorized compliance source tests regardless of pass, fail or reschedule because of failure status. A District authorized compliance source test shall not be discontinued solely due to the failure of one or more runs to meet applicable standards.

- Condition 20 from current PTO -2-6 and condition 33 on current PTOs -282-3 and -283-3 have been included as federally enforceable condition 22 of the requirements for permit unit -2-7 and condition 33 of the requirements for permit units -282-2 and -283-2.

### **3. District Rule 2201, New and Modified Stationary Source Review Rule**

For this facility, only the following emission units have become subject to the District NSR Rule due to application for Authority to Construct (ATC). In accordance with the White Paper for Streamlined Development of Part 70 Permit Applications, dated July 10, 1995, conditions from the resulting

PTO were addressed to define how NSR permit terms should be incorporated into the Title V permit.

- a. **C-629-2-7:** 47.8 MMBTU/HR BABCOCK AND WILCOX NATURAL GAS-FIRED BOILER (SERIAL #NB21232) WITH AN AMERICAN COMBUSTION TECH MODEL ACI-04G LOW NOX BURNER WITH INDUCED FLUE GAS RECIRCULATION
  - Conditions 1, 5, 6, and 7 from the current PTO have been included as federally enforceable conditions 1, 3, 4, and 6 of the requirements for permit unit -2-7.
- b. **C-629-4-1:** 165 BHP CATERPILLAR MODEL 3208 DIESEL-FIRED EMERGENCY IC ENGINE POWERING FIRE PROTECTION EQUIPMENT
  - Condition 4 from the current PTO have been included as federally enforceable condition 2 of the requirements for permit unit -4-1.
- c. **C-629-5-1 and -6-1:** 185 BHP CUMMINS MODEL #V504 DIESEL-FIRED EMERGENCY IC ENGINE POWERING FIRE PROTECTION EQUIPMENT
  - Condition 3 from the current PTOs have been included as federally enforceable condition 2 of the requirements for permit units -5-1 and -6-1.
- d. **C-629-282-2 and -283-2:** 66,000 BARREL CAPACITY BRANDY STORAGE AND AGING OPERATION (WAREHOUSES 1 & 2) SERVED BY A 0.289 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 1.0 RTO95 REGENERATIVE THERMAL OXIDIZER AND A 1.7 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 6.0 RTO95 REGENERATIVE THERMAL OXIDIZER
  - Conditions 2 through 32 and 34 through 41 from the current PTOs have been included as federally enforceable conditions 2 through 32, 34 through 35, and 43 through 48 of the requirements for permit units -282-2 and -283-2.
- e. **C-629-284-3 through -287-3:** 60,000 GALLON STAINLESS STEEL WINE AND DISTILLED SPIRIT STORAGE TANK WITH PRESSURE VACUUM VALVE
  - Conditions 2 through 10 and condition 13 from the current PTOs have been included as federally enforceable conditions 2 through

10 and 13 of the requirements for permit units -284-2 through -287-2

**f. C-629-288-3: 190,000 GALLON STAINLESS STEEL WINE AND DISTILLED SPIRIT STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 305)**

- Conditions 2 through 10 and condition 13 from the current PTO have been included as federally enforceable conditions 2 through 10 and 13 of the requirements for permit units -284-2 through -287-2

**g. C-629-289-4 through -302-4: 190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE**

- Conditions 2 through 9 and condition 12 from the current PTOs have been included as federally enforceable conditions 2 through 9 and 12 of the requirements for permit units -289-2 through -302-2

**h. C-629-303-3 through -306-3, -317-3 through -320-3: 121,000 GALLON STEEL WINE STORAGE WITH PRESSURE/VACUUM VALVE AND INSULATION**

- Conditions 2 through 7 and condition 10 from the current PTOs have been included as federally enforceable conditions 2 through 7 and 10 of the requirements for permit units -303-2 through -306-2 and -317-2 through -320-2

**i. C-629-307-3 through -316-3: 45,500 GALLON STEEL WINE STORAGE TANK WITH PRESSURE/VACUUM VALVE AND INSULATION**

- Conditions 2 through 7 and condition 10 from the current PTOs have been included as federally enforceable conditions 2 through 7 and 10 of the requirements for permit units -307-2 through -316-2

**4. District Rule 2520, Federally Mandated Operating Permits**

Section 9.3 requires that each permit shall contain 1) all emissions monitoring and analysis procedures or test methods required under the applicable requirements, 2) periodic monitoring to yield reliable data for the relevant time period that are representative of the source's compliance with the permit where applicable requirements do not require periodic testing or instrumental or non-instrumental monitoring and 3)

requirements, as necessary, concerning the use, maintenance, and where appropriate, installation of monitoring equipment or methods.

Section 9.4.2 requires that recordkeeping be performed if none is associated with a given emission limit to assure compliance.

Section 9.14.1 of Rule 2520 requires that, for sources in violation of an applicable requirement, a schedule of compliance be included in the Title V permit. This source has not been determined to be in violation of any applicable requirements

**a. C-629-2-7: 47.8 MMBTU/HR BABCOCK AND WILCOX NATURAL GAS-FIRED BOILER (SERIAL #NB21232) WITH AN AMERICAN COMBUSTION TECH MODEL ACI-04G LOW NOX BURNER WITH INDUCED FLUE GAS RECIRCULATION**

- Conditions 8-11 and condition 21 from the current PTO have been included as federally enforceable conditions 7-10 and 23 of the requirements for permit unit -2-7, respectively. Condition 24 has also been added to permit unit -2-7.

**b. C-629-4-1, -5-1, and -6-1: DIESEL-FIRED EMERGENCY IC ENGINE POWERING FIRE PROTECTION EQUIPMENT**

- Conditions 6, 7, and 10 from the current PTOs have been included as federally enforceable conditions 4, 5, and 8 of the requirements for permit units -4-1, -5-1, and -6-1.

**c. C-629-282-2 and -283-2: 66,000 BARREL CAPACITY BRANDY STORAGE AND AGING OPERATION SERVED BY A 0.289 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 1.0 RTO95 REGENERATIVE THERMAL OXIDIZER AND A 1.7 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 6.0 RTO95 REGENERATIVE THERMAL OXIDIZER**

- Conditions 12, 16, 17, 19, 24, and 36-41 from the current PTOs have been included as federally enforceable conditions 12, 16, 17, 19, 24, and 43-48 of the requirements for permit units -282-2 and -283-2.

**5. District Rule 4201 Particulate Matter Concentration (Amended December 17, 1992)**

District Rule 4201 requires emissions to be at or below 0.1 grains of particulate matter per dry standard cubic foot of exhaust gas.

Units C-629-2-7, -282-2, and -283-2 are the only units subject to this rule.

**Natural gas combustion:**

The following analysis demonstrates that PM emissions from a boiler fired on natural gas or propane will not exceed 0.1 gr/dscf:

**Natural Gas:**

*F-Factor for NG: 8,578 dscf/MMBtu at 60 °F (40 CFR 60)*

*PM10 Emission Factor: 0.0076 lb-PM10/MMBtu (AP-42)*

*Percentage of PM as PM10 in Exhaust: 100%*

*Exhaust Oxygen (O<sub>2</sub>) Concentration: 3%*

$$\text{Excess Air Correction to F Factor} = \frac{20.9}{(20.9 - 3)} = 1.17$$

$$GL = \left( \frac{0.0076 \text{ lb - PM}}{\text{MMBtu}} \times \frac{7,000 \text{ grain}}{\text{lb - PM}} \right) / \left( \frac{8,578 \text{ ft}^3}{\text{MMBtu}} \times 1.17 \right)$$

$$GL = 0.0053 \text{ grain/dscf} < 0.1 \text{ grain/dscf}$$

**LPG:**

*F-Factor for LPG: 8,578 dscf/MMBtu at 60 °F (40 CFR 60)*

*PM10 Emission Factor: 0.0087 lb-PM10/MMBtu (AP-42)*

*Percentage of PM as PM10 in Exhaust: 100%*

*Exhaust Oxygen (O<sub>2</sub>) Concentration: 3%*

$$\text{Excess Air Correction to F Factor} = \frac{20.9}{(20.9 - 3)} = 1.17$$

$$GL = \left( \frac{0.0087 \text{ lb - PM}}{\text{MMBtu}} \times \frac{7,000 \text{ grain}}{\text{lb - PM}} \right) / \left( \frac{8,578 \text{ ft}^3}{\text{MMBtu}} \times 1.17 \right)$$

$$GL = 0.0061 \text{ grain/dscf} < 0.1 \text{ grain/dscf}$$

- a. **C-629-2-7:** 47.8 MMBTU/HR BABCOCK AND WILCOX NATURAL GAS-FIRED BOILER (SERIAL #NB21232) WITH AN AMERICAN COMBUSTION TECH MODEL ACI-04G LOW NOX BURNER WITH INDUCED FLUE GAS RECIRCULATION
  - Condition 2 from the current PTO has been included as federally enforceable condition 2 of the requirements for permit unit -2-7.
- b. **C-629-282-2 and -283-2:** 66,000 BARREL CAPACITY BRANDY STORAGE AND AGING OPERATION SERVED BY A 0.289 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 1.0 RTO95 REGENERATIVE THERMAL OXIDIZER AND A 1.7 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 6.0 RTO95 REGENERATIVE THERMAL OXIDIZER
  - Condition 1 from the current PTOs have been included as federally enforceable condition 1 of the requirements for permit units -282-2 and -283-2.

**6. District Rule 4301 Fuel Burning Equipment (Amended December 17, 1992)**

District Rule 4301 limits the emissions of air contaminants from fuel burning equipment. This rule limits the concentration of combustion contaminants and specifies maximum emission rates for sulfur dioxide, nitrogen oxide and combustion contaminant emissions.

Unit C-269-2-7 is the only unit subject to this rule.

Sections 5.1 and 5.2.3 limits particulate matter emission. Section 5.1 limits the emission of combustion contaminants in the form of PM to 0.1 grain per cubic foot of gas corrected to 12% carbon dioxide. Section 5.2.3 limits PM to 10 lb/hr. As previously demonstrated in District Rule 4201 - Particulate Matter Concentration the following units listed shall not exceed 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr.

Section 5.2.1 limits SO<sub>x</sub> emission to 200 lb/hr.

Section 5.2.2 limits nitrogen oxides to 140 pounds per hour calculated as nitrogen dioxide (NO<sub>2</sub>).

- a. **C-629-2-7: 47.8 MMBTU/HR BABCOCK AND WILCOX NATURAL GAS-FIRED BOILER (SERIAL #NB21232) WITH AN AMERICAN COMBUSTION TECH MODEL ACI-04G LOW NOX BURNER WITH INDUCED FLUE GAS RECIRCULATION**

- Condition 7 from the current PTO has been included as federally enforceable condition 6 of the requirements for permit unit -2-7.

**7. District Rule 4305, Boilers, Steam Generators and Process Heaters – Phase 2 (amended August 21, 2003)**

The purpose of this rule is to limit the emissions of nitrogen oxides (NO<sub>x</sub>) and carbon monoxide (CO) from boilers, steam generators and process heaters. This rule applies to any boiler, steam generator or process heater with a rated capacity greater than 5 MMBtu/hour.

Since emissions limits of District Rule 4306 and all other requirements are equivalent or more stringent than District Rule 4305 requirements, compliance with District Rule 4306 requirements will satisfy requirements of District Rule 4305. Therefore, the requirements of Rule 4305 are subsumed by compliance with District Rule 4306.

**8. District Rule 4306, Boilers, Steam Generators and Process Heaters – Phase 3 (amended March 17, 2005)**

Unit C-629-2-7 is the only unit at this facility that is subject to the requirements of this rule.

The purpose of this rule is to limit emissions oxides of nitrogen (NO<sub>x</sub>) and carbon monoxide (CO) from the operation of boilers, steam generators, and process heaters.

Current District Rule 4306 (amended 10/16/08) has not been SIP approved. Attachment F contains the streamlining of the SIP approved District Rule 4306 (9/18/03) to the current District Rule 4306 to show the current rule is as stringent if not more than the SIP approved version.

**Section 5.1, NO<sub>x</sub> and CO Emissions Limits**

Section 5.1.1 requires that except for units subject to Sections 5.2, NO<sub>x</sub> and carbon monoxide (CO) emissions shall not exceed the limits specified in the following table. All ppmv emission limits specified in this section are referenced at dry stack gas conditions and 3.0 percent by volume stack

gas oxygen. Emission concentrations shall be corrected to 3.0 percent oxygen in accordance with Section 8.1.

Category	Operated on gaseous fuel		Operated on liquid fuel	
	NO <sub>x</sub> Limit	CO Limit	NO <sub>x</sub> Limit	CO Limit
B. Units with a rated heat input greater than 20.0 MMBtu/hour, except for Categories C, D, E, F, G, H, and I units	9 ppmv or 0.011 lb/MMBtu	400 ppmv	40 ppmv or 0.052 lb/MMBtu	400 ppmv

Condition 6 of the requirements for permit unit -2-7 ensures compliance with these requirements

### Section 5.2, Low Use

The unit's annual heat input will exceed the 9 billion Btu heat input per calendar year criteria limit addressed by this section. Since the unit is not subject to Section 5.2, the requirements of this section will not be discussed.

### Section 5.3, Startup and Shutdown Provisions

Section 5.3 states that on and after the full compliance schedule specified in Section 7.1, the applicable emission limits of Sections 5.1, 5.2.2 and 5.2.3 shall not apply during start-up or shutdown provided an operator complies with the requirements specified in Sections 5.3.1 through 5.3.4. Since the unit is not subject to Section 5.3, the requirements of this section will not be discussed.

### Section 5.4, Monitoring Provisions

Section 5.4.1 states that the operator of any unit which simultaneously fires gaseous and liquid fuels, and is subject to the requirements of Section 5.1, shall install and maintain an operational non-resettable, totalizing mass or volumetric flow meter in each fuel line to each unit. Volumetric flow measurements shall be periodically compensated for temperature and pressure.

Section 5.4.2 states that the operator of any unit subject to the applicable emission limits in Sections 5.1 shall install and maintain an operational APCO approved Continuous Emissions Monitoring System (CEMS) for

NO<sub>x</sub>, CO, and oxygen, or implement an APCO-approved Alternate Monitoring System. An APCO approved CEMS shall comply with the requirements of 40 Code of Federal Regulations (CFR) Part 51, 40 CFR Parts 60.7 and 60.13 (except subsection h), 40 CFR Part 60 Appendix B (Performance Specifications) and 40 CFR Part 60 Appendix F (Quality Assurance Procedures, and applicable provisions of Rule 1080 (Stack Monitoring). An APCO approved Alternate Monitoring System shall monitor one or more of the following:

- periodic NO<sub>x</sub> and CO exhaust emission concentrations,
- periodic exhaust oxygen concentration,
- flow rate of reducing agent added to exhaust,
- catalyst inlet and exhaust temperature,
- catalyst inlet and exhaust oxygen concentration,
- periodic flue gas recirculation rate,
- other operational characteristics.

Section 5.4.3 states requirements for units that are limited to a heat input less than 9 billion Btu per year. The unit is not limited to an annual heat input of less than 9 billion Btu; therefore the requirements of this section are not applicable to the unit in this project.

Section 5.4.4 states requirements for units included in Category H. Since the boiler at this facility is not included in Category H, it is not subject to the requirements of this section.

Section 5.4.5 states the requirements for an APCO approved alternative monitoring system. The applicant only uses APCO approved monitoring schemes; therefore the requirements of this section are not applicable to the unit in this project.

Conditions 7 through 10 of the requirements for permit unit -2-7 ensures compliance with these requirements

### **Section 5.5, Compliance Determination**

Section 5.5.1 requires that the operator of any unit shall have the option of complying with either the applicable heat input (lb/MMBtu) emission limits or the concentration (ppmv) emission limits specified in Section 5.1. The emission limits selected to demonstrate compliance shall be specified in the source test proposal pursuant to Rule 1081 (Source Sampling).

Section 5.5.2 requires that all emissions measurements shall be made with the unit operating either at conditions representative of normal

operations or conditions specified in the Permit to Operate. No determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0.

Section 5.5.4 requires that for emissions monitoring pursuant to Sections 5.4.2, 5.4.2.1, and 6.3.1 using a portable NO<sub>x</sub> analyzer as part of an APCO approved Alternate Emissions Monitoring System, emission readings shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15-consecutive-minute sample reading or by taking at least five (5) readings evenly spaced out over the 15-consecutive-minute period.

Section 5.5.5 requires that for emissions source testing performed pursuant to Section 6.3.1 for the purpose of determining compliance with an applicable standard or numerical limitation of this rule, the arithmetic average of three (3) 30-consecutive-minute test runs shall apply. If two (2) of three (3) runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit.

Conditions 9, 11, 13, and 19 of the requirements for permit unit -2-7 ensures compliance with these requirements

### **Section 6.1, Recordkeeping**

Section 6.1 requires that the records required by Sections 6.1.1 through 6.1.4 shall be maintained for five calendar years and shall be made available to the APCO upon request. Failure to maintain records or information contained in the records that demonstrate noncompliance with the applicable requirements of this rule shall constitute a violation of this rule.

Section 6.1.1 applies to units seeking exemption under Section 4.2. The unit is not subject to this exemption.

Section 6.1.2 requires that the operator of a unit subject to Category H unit listed in Section 5.1.1 Table 1 or to Section 5.2 shall record the amount of fuel use at least on a monthly basis. The unit is not subject to the requirements of Category H; therefore the requirements of this section are not applicable.

Section 6.1.3 requires that the operator of a unit subject to Section 5.2.1 or 6.3.1 shall maintain records to verify that the required tune-up and the required monitoring of the operational characteristics have been

performed. Section 6.3.1 states that tune-ups required by Sections 5.2.1 and 6.3.1 do not need to be performed for units that operate and maintain an APCO approved CEMS or an APCO approved Alternate Monitoring System where the applicable emission limits are periodically monitored. The unit maintains an APCO approved Alternate Monitoring System where the applicable emission limits are periodically monitored; therefore the requirements of this section are not applicable.

Section 6.1.4 requires the operator performing start-up or shutdown of a unit shall keep records of the duration of start-up or shutdown. The unit is not subject to start-up and shutdown provisions. Therefore this section does not apply.

### **Section 6.2, Test Methods**

Section 6.2 identifies the following test methods as District-approved source testing methods for the pollutants listed:

<b>Pollutant</b>	<b>Units</b>	<b>Test Method Required</b>
NO <sub>x</sub>	ppmv	EPA Method 7E or ARB Method 100
NO <sub>x</sub>	lb/MMBtu	EPA Method 19
CO	ppmv	EPA Method 10 or ARB Method 100
Stack Gas O <sub>2</sub>	%	EPA Method 3 or 3A, or ARB Method 100
Stack Gas Velocities	ft/min	EPA Method 2
Stack Gas Moisture Content	%	EPA Method 4

In addition, fuel hhv shall be certified by third party fuel supplier or determined by: 6.2.1.1 ASTM D 240-87 or D 2382-88 for liquid hydrocarbon fuels; 6.2.1.2 ASTM D 1826-88 or D 1945-81 in conjunction with ASTM D 3588-89 for gaseous fuels.

Conditions 16 through 18 from the current PTO have been included as federally enforceable conditions 15 through 17 of the requirements for permit unit -2-7.

### **Section 6.3, Compliance Testing**

Section 6.3.1 requires that this unit be tested to determine compliance with the applicable requirements of section 5.1 and 5.2.3 not less than once every 12 months.

In addition, since the applicant has proposed to use pre-approved Alternate Monitoring Scheme "A" using a portable analyzer, the tune-up

requirements listed in Section 6.3.1 is not applicable to the boiler. Section 6.3.1 also requires that, during the 36-month source testing interval, the owner/operator shall monthly monitor the operational characteristics recommended by the unit manufacturer. Since the pre-approved Alternate Monitoring Scheme "A" using a portable analyzer requires monthly monitoring of NO<sub>x</sub>, CO, and O<sub>2</sub> exhaust emissions concentrations, operational characteristics monitoring requirement is satisfied, and no further discussion is required.

Condition 13 from the current PTO has been included as federally enforceable condition 12 of the requirements for permit unit -2-7.

**9. District Rule 4351, Boilers, Steam Generators and Process Heaters – Phase 1 (amended August 21, 2003)**

The purpose of this rule is to limit the emissions of nitrogen oxides (NO<sub>x</sub>) and carbon monoxide (CO) from boilers, steam generators and process heaters. This rule applies to any boiler, steam generator or process heater with a rated capacity greater than 5 MMBtu/hour.

Since emissions limits of District Rule 4306 and all other requirements are equivalent or more stringent than District Rule 4351 requirements, compliance with District Rule 4306 requirements will satisfy requirements of District Rule 4351. Therefore, the requirements of Rule 4351 are subsumed by compliance with District Rule 4306.

**10. District Rule 4701, Internal Combustion Engines–Phase 1**

Pursuant to Section 7.5.2.3 of District Rule 4702, as of June 1, 2006 District Rule 4701 is no longer applicable to diesel-fired emergency standby or emergency IC engines. Therefore, the diesel-fired emergency IC engines at this facility will comply with the requirements of District Rule 4702 and no further discussion is required.

**11. District Rule 4702, Internal Combustion Engines–Phase 2**

The purpose of this rule is to limit the emissions of nitrogen oxides (NO<sub>x</sub>), carbon monoxide (CO), and volatile organic compounds (VOC) from internal combustion engines. This rule applies to any internal combustion (IC) engine with a rated brake horsepower greater than 50 horsepower.

Units C-629-4-1, -5-1, and -6-1 are the only units at this facility that are subject to the requirements of this rule.

Pursuant to Section 4.3, except for the requirements of Section 6.2.3, the requirements of this rule shall not apply to an internal combustion engine that meets the following conditions:

- 1) The engine is operated exclusively to preserve or protect property, human life, or public health during a disaster or state of emergency, such as a fire or flood, and
- 2) Except for operations associated with Section 4.3.1.1, the engine is limited to operate no more than 100 hours per calendar year as determined by an operational nonresettable elapsed operating time meter, for periodic maintenance, periodic readiness testing, and readiness testing during and after repair work of the engine, and
- 3) The engine is operated with a nonresettable elapsed operating time meter. In lieu of installing a nonresettable time meter, the owner of an engine may use an alternative device, method, or technique, in determining operating time provided that the alternative is approved by the APCO. The owner of the engine shall properly maintain and operate the time meter or alternative device in accordance with the manufacturer's instructions.

Section 6.2.3 requires that an owner claiming an exemption under Section 4.2 or Section 4.3 shall maintain annual operating records. This information shall be retained for at least five years, shall be readily available, and submitted to the APCO upon request and at the end of each calendar year in a manner and form approved by the APCO.

- Conditions 1, 3, 4, and 8 of the requirements for this permit assure compliance with this rule.

## **12. 40 CFR Part 60, Subpart IIII, Standards of Performance for Stationary Compression Ignition Internal Combustion Engines**

This subpart applies to owners and operators of stationary compression ignition (CI) internal combustion engines (ICE) that commences construction, modify, or reconstruct their stationary CI ICE after July 11, 2005.

Permit units C-629-4, -5, and -6 were installed prior to July 11, 2005 and are not subject to this subpart.

**13. 40 CFR Part 63, Subpart ZZZZ, National Emissions Standards for Hazardous Air Pollutants for Stationary Reciprocating Internal Combustion Engines**

Subpart ZZZZ establishes national emission limitations and operating limitations for hazardous air pollutants (HAP) emitted from stationary reciprocating internal combustion engines (RICE) located at major and area sources of HAP emissions. This subpart also establishes requirements to demonstrate initial and continuous compliance with the emission limitations and operating limitations.

§6585(b) states, "A major source of HAP emissions is a plant site that emits or has the potential to emit any single HAP at a rate of 10 tons (9.07 megagrams) or more per year or any combination of HAP at a rate of 25 tons (22.68 megagrams) or more per year, except that for oil and gas production facilities, a major source of HAP emissions is determined for each surface site."

§6585(c) states, "An area source of HAP emissions is a source that is not a major source."

The facility is not a major source as defined in §6585(b). Therefore, this facility is an area source of HAP emissions.

§6590(a) states, "An affected source is any existing, new, or reconstructed stationary RICE located at a major or area source of HAP emissions, excluding stationary RICE being tested at a stationary RICE test cell/stand."

§6590(a)(1) defines the criteria for an existing stationary RICE as follows:

- (i) For stationary RICE with a site rating of more than 500 brake horsepower (HP) located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before December 19, 2002.
- (ii) For stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.
- (iii) For stationary RICE located at an area source of HAP emissions, a stationary RICE is existing if you commenced construction or reconstruction of the stationary RICE before June 12, 2006.

- (iv) A change in ownership of an existing stationary RICE does not make that stationary RICE a new or reconstructed stationary RICE.

This facility is an area source of HAP emissions. The engines at this facility have not commenced construction or reconstruction on or after June 12, 2006. Therefore, the engines at this facility meet the definition of an existing stationary RICE as defined in §6590(a)(1)(iii).

§6590(b)(3) states that the following engines do not have to meet the requirements of this subpart and of subpart A of this part:

- stationary RICE which is an existing spark ignition 4 stroke rich burn (4SRB) stationary RICE located at an area source,
- existing spark ignition 4SRB stationary RICE with a site rating of less than or equal to 500 brake HP located at a major source, an existing spark ignition 2 stroke lean burn (2SLB) stationary RICE,
- existing spark ignition 4 stroke lean burn (4SLB) stationary RICE,
- existing compression ignition (CI) stationary RICE,
- existing emergency stationary RICE,
- existing limited use stationary RICE, or
- existing stationary RICE that combusts landfill gas or digester gas equivalent to 10 percent or more of the gross heat input on an annual basis

The engines at this facility are existing emergency stationary RICE. Therefore, the engines do not have to meet the requirements of this subpart and of subpart A of this part. No further discussion is required.

#### **14. 40 CFR Part 60, Subpart Dc, Standards of Performance for Small Industrial-Commercial-Industrial Steam Generators**

This rule incorporates NSPS from Part 60, Chapter 1, Title 40, Code of Federal Regulations (CFR); and applies to all new sources of air pollution and modifications of existing sources of air pollution listed in 40 CFR Part 60. 40 CFR Part 60, Subpart Dc applies to Small Industrial-Commercial-Industrial Steam Generators between 10 MMBtu/hr and 100 MMBtu/hr (post-6/9/89 construction, modification or, reconstruction). Subpart Dc has standards for SO<sub>x</sub> and PM<sub>10</sub>. The 47.8 MMBtu/hr boiler is subject to Subpart Dc requirements.

§60.332 Standard for Sulfur Dioxide:

Since coal is not combusted by the boiler in this project, the requirements of this section are not applicable.

§ 60.43c Standards for Particulate Matter

The boiler is not fired on coal, combusts mixtures of coal with other fuels, combusts wood, combusts mixtures of wood with other fuels, or oil; therefore it will not be subject to the requirements of this section.

§60.44c Compliance and Performance Tests Methods and Procedures for Sulfur Dioxide.

Since the boiler in this project is not subject to the sulfur dioxide requirements of this subpart, no testing to show compliance is required. Therefore, the requirements of this section are not applicable to the boiler in this project.

§60.45c Compliance and Performance Test Methods and Procedures for Particulate Matter

Since the boiler in this project is not subject to the particulate matter requirements of this subpart, no testing to show compliance is required. Therefore, the requirements of this section are not applicable to the boiler in this project.

§60.46c Emission Monitoring for Sulfur Dioxide

Since the boiler in this project is not subject to the sulfur dioxide requirements of this subpart, no monitoring is required. Therefore, the requirements of this section are not applicable to the boiler in this project.

§60.47c Emission Monitoring for Particulate Matter

Since the boiler in this project is not subject to the particulate matter requirements of this subpart, no monitoring is required. Therefore, the requirements of this section are not applicable to the boiler in this project.

§60.48c Reporting and Recordkeeping Requirements

Section 60.48c (a) states that the owner or operator of each affected facility shall submit notification of the date of construction or

reconstruction, anticipated startup, and actual startup, as provided by §60.7 of this part. This notification shall include:

- (1) The design heat input capacity of the affected facility and identification of fuels to be combusted in the affected facility.

*The design heat input capacity and type of fuel combusted at the facility will be listed on the unit's equipment description. No conditions are required to show compliance with this requirement.*

- (2) If applicable, a copy of any Federally enforceable requirement that limits the annual capacity factor for any fuel mixture of fuels under §60.42c or §40.43c.

*This requirement is not applicable since the units are not subject to §60.42c or §40.43c.*

- (3) The annual capacity factor at which the owner or operator anticipates operating the affected facility based on all fuels fired and based on each individual fuel fired.

*The facility has not proposed an annual capacity factor; therefore one will not be required.*

- (4) Notification if an emerging technology will be used for controlling SO<sub>2</sub> emissions. The Administrator will examine the description of the control device and will determine whether the technology qualifies as an emerging technology. In making this determination, the Administrator may require the owner or operator of the affected facility to submit additional information concerning the control device. The affected facility is subject to the provisions of §60.42c(a) or (b)(1), unless and until this determination is made by the Administrator

*This requirement is not applicable since the unit will not be equipped with an emerging technology used to control SO<sub>2</sub> emissions.*

Section 60.48 c (g) states that the owner or operator of each affected facility shall record and maintain records of the amounts of each fuel combusted during each day.

Section 60.48 c (i) states that all records required under this section shall be maintained by the owner or operator of the affected facility for a period

of two years following the date of such record. District Rule 4306 requires that records be kept for five years.

a. **C-629-2-7: 40.26 MMBTU/HR TRANE MURRAY NATURAL GAS-FIRED BOILER WITH A CLEAVER BROOKS PROFIRE MODEL NT420NGX-19 ULTRA LOW NOX BURNER AND FLUE GAS RECIRCULATION**

- Conditions 5 and 24 of the requirements for permit unit -2-7 ensure compliance with these requirements.

**15. 40 CFR Part 64, Compliance Assurance Monitoring (CAM)**

**§64.2 – Applicability**

This section requires Compliance Assurance Monitoring (CAM) for units that meet the following three criteria:

- 1) the unit must have an emission limit for the pollutant;
- 2) the unit must have add-on controls for the pollutant; such as flue gas recirculation (FGR), baghouses, and catalytic oxidizers; and
- 3) the unit must have a pre-control potential to emit of greater than the major source thresholds.

<b>Pollutant</b>	<b>Major Source Threshold (lb/year)</b>
VOC	50,000
NO <sub>x</sub>	50,000
CO	200,000
PM <sub>10</sub>	140,000
SO <sub>x</sub>	140,000

a. **C-629-2-7: 47.8 MMBTU/HR BABCOCK AND WILCOX NATURAL GAS-FIRED BOILER (SERIAL #NB21232) WITH AN AMERICAN COMBUSTION TECH MODEL ACI-04G LOW NOX BURNER WITH INDUCED FLUE GAS RECIRCULATION**

- 1) This unit contains emission limits for NO<sub>x</sub>, SO<sub>x</sub>, PM<sub>10</sub>, CO, and VOC.
- 2) This unit is served by a Flue Gas Recirculation (FGR) system to control NO<sub>x</sub> emissions. There are no add-on controls for SO<sub>x</sub>, PM<sub>10</sub>, VOC, or CO emissions. Therefore, this unit is not subject to CAM for SO<sub>x</sub>, PM<sub>10</sub>, VOC, or CO emissions.

- 3) The FGR system will be assumed to have 70% control efficiency.

**Pre-control Annual PE:**

Using the permitted NO<sub>x</sub> emission factor and the heat input rating of the burner, the pre-controlled annual emissions are calculated as follows:

$$\begin{aligned} PE &= EF \text{ (lb/MMBtu)} \times \text{Heat Input (MMBtu/hr)} \times 8,760 \text{ hr/year} \\ &= (0.011 \text{ lb-NO}_x\text{/MMBtu}) \times (47.8 \text{ MMBtu/hr}) \times (8,760 \text{ hr/year}) \\ &= \mathbf{4,606 \text{ lb-NO}_x\text{/year}} \end{aligned}$$

$$\begin{aligned} \text{Pre-control PE} &= PE \div (1 - CE) \\ &= (4,606 \text{ lb-NO}_x\text{/year}) \div (1 - 0.7) \\ &= \mathbf{15,353 \text{ lb-NO}_x\text{/year}} \end{aligned}$$

Since 15,353 lb-NO<sub>x</sub>/yr < 50,000 lb-NO<sub>x</sub>/yr (Major Source threshold for NO<sub>x</sub>), this unit is not subject to CAM for NO<sub>x</sub> emissions.

**b. C-629-4-1 through -6-1: DIESEL-FIRED EMERGENCY IC ENGINES**

This engine does not have any emissions limits or add-on controls for any pollutant that would cause the unit to be subject to this requirement. Therefore, CAM is not required.

**c. C-629-11-1 through -13-1, -24-1 through -29-1, -40-1 through -45-1, -54-1 through -135-1, -139-1 through -141-1, -238-1 through -239-1, -264-1 through -279-1, -284-3 through -320-3: STEEL WINE STORAGE TANKS**

These emissions units do not have emission limits for any criteria pollutants and are therefore not subject to CAM.

**d. C-629-30-1, -31-1: IRON COATED WINE STORAGE TANKS**

These emissions units do not have emission limits for any criteria pollutants and are therefore not subject to CAM.

**e. C-629-144-1 through -191-1: CONCRETE WINE FERMENTATION AND STORAGE TANKS**

These emissions units do not have emission limits for any criteria pollutants and are therefore not subject to CAM.

**f. C-629-192-1 through -237-1, -240-1 through -254-1, -264-1 through -279-1: STEEL WINE FERMENTATION AND STORAGE TANKS**

These emissions units do not have emission limits for any criteria pollutants and are therefore not subject to CAM.

**g. C-629-255-1 through -263-1: CONCRETE WINE STORAGE TANKS**

These emissions units do not have emission limits for any criteria pollutants and are therefore not subject to CAM.

**h. C-629-280-1 and -281-1 : PLASTIC WINE STORAGE TANKS**

These emissions units do not have emission limits for any criteria pollutants and are therefore not subject to CAM.

**i. C-629-282-2 and -283-2: BRANDY STORAGE AND AGING OPERATIONS SERVED BY REGENERATIVE THERMAL OXIDIZERS**

- 1) This unit contains emission limits for NO<sub>x</sub>, SO<sub>x</sub>, PM<sub>10</sub>, CO, and VOC.
- 2) This unit is served by two regenerative thermal oxidizers to control VOC emissions. There are no add-on controls for NO<sub>x</sub>, SO<sub>x</sub>, PM<sub>10</sub>, or CO emissions. Therefore, this unit is not subject to CAM for NO<sub>x</sub>, SO<sub>x</sub>, PM<sub>10</sub>, or CO emissions.
- 3) The thermal oxidizers are required by permit to have a minimum VOC destruction efficiency of 98%.

The equipment and permit requirements for units -282-2 and -283-2 are identical. The following discussion pertains to both units.

**Pre-control Annual PE:**

The unit has a permitted VOC limit of 144.4 lb/day during "normal operation."

$$\begin{aligned} PE &= (144.4 \text{ lb-VOC/day}) \times (365 \text{ day/yr}) \\ &= \mathbf{52,706 \text{ lb-VOC/year}} \end{aligned}$$

$$\begin{aligned} \text{Pre-control PE} &= PE \div (1 - CE) \\ &= (52,706 \text{ lb-VOC/year}) \div (1 - 0.98) \\ &= \mathbf{2,635,300 \text{ lb-VOC/year}} \end{aligned}$$

Since 2,635,300 lb-VOC/yr < 50,000 lb-VOC/yr (Major Source threshold for NO<sub>x</sub>), this unit is subject to CAM for VOC emissions. Additionally, as previously calculated, the post-control VOC emissions exceed the Major Source threshold. Therefore, a 15-minute monitoring interval is required.

CAM requirements are satisfied as the facility is equipped with a continuous monitoring system that monitors the combustion chamber temperature of each in-service regenerative thermal oxidizer. Additionally, the warehouses housing the brandy will be required to be certified and maintained as Permanent Total Enclosures (PTE) pursuant to EPA Method 204, and the fan inlet pressure control for each enclosure will be continuously monitored as well. Finally, all non-manway access openings will be continuously monitored to record the time periods that each door to the warehouse is opened, and all hours of "normal operation" will be monitored and recorded. The sampling frequency of the facility's continuous monitoring system will be no more than 15 minutes.

Conditions 12, 13, 16, 17, 24, and 39-42 on permits -282-2 and -283-2 ensure compliance.

#### **16. 40 CFR Part 61, Subpart M, National Emission Standard for Asbestos**

These regulations apply to demolition or renovation activity, as defined in 40 CFR 61.141. 40 CFR Section 61.150 of this subpart was amended September 18, 2003.

Condition 35 on proposed permit -0-1 ensures compliance with this requirement.

#### **17. 40 CFR Part 82, Subparts B and F, Stratospheric Ozone**

These regulations apply to servicing motor vehicles when this service involves the ozone-depleting refrigerant in the motor vehicle air conditioner (MVAC). Sections of this regulation were amended in 2007 and 2008.

Conditions 27 and 28 on proposed permit -0-1 ensure compliance with these requirements.

## **X. PERMIT SHIELD**

A permit shield legally protects a facility from enforcement of the shielded regulations when a source is in compliance with the terms and conditions of the Title V permit. Compliance with the terms and conditions of the Operating Permit is considered compliance with all applicable requirements upon which those conditions are based, including those that have been subsumed.

### **Requirements Addressed by Model General Permit Templates**

By using the model general permit template(s) listed in Section IV of this evaluation, the applicant has requested that a permit shield be issued for requirements addressed in the template(s). The basis for each permit shield is discussed in the Permit Shield section of each template.

## **XI. PERMIT CONDITIONS**

See operating permit beginning on the following page.

# San Joaquin Valley Air Pollution Control District

FACILITY: C-629-0-1

EXPIRATION DATE: 07/31/2012

## FACILITY-WIDE REQUIREMENTS

1. {2285} The owner or operator shall notify the District of any breakdown condition as soon as reasonably possible, but no later than one hour after its detection, unless the owner or operator demonstrates to the District's satisfaction that the longer reporting period was necessary. [District Rule 1100, 6.1; County Rules 110 (Fresno, Stanislaus, San Joaquin); 109 (Merced); 113 (Madera); and 111 (Kern, Tulare, Kings)] Federally Enforceable Through Title V Permit
2. {2286} The District shall be notified in writing within ten days following the correction of any breakdown condition. The breakdown notification shall include a description of the equipment malfunction or failure, the date and cause of the initial failure, the estimated emissions in excess of those allowed, and the methods utilized to restore normal operations. [District Rule 1100, 7.0; County Rules 110 (Fresno, Stanislaus, San Joaquin); 109 (Merced); 113 (Madera); and 111 (Kern, Tulare, Kings)] Federally Enforceable Through Title V Permit
3. {2287} The owner or operator of any stationary source operation that emits more than 25 tons per year of nitrogen oxides or reactive organic compounds, shall provide the District annually with a written statement in such form and at such time as the District prescribes, showing actual emissions of nitrogen oxides and reactive organic compounds from that source. [District Rule 1160, 5.0] Federally Enforceable Through Title V Permit
4. Any person building, altering or replacing any operation, article, machine, equipment, or other contrivance, the use of which may cause the issuance of air contaminants or the use of which may eliminate, reduce, or control the issuance of air contaminants, shall first obtain an Authority to Construct (ATC) from the District unless exempted by District Rule 2020 (12/20/07). [District Rules 2010, 3.0 and 4.0 and 2020] Federally Enforceable Through Title V Permit
5. {2289} The permittee must comply with all conditions of the permit including permit revisions originated by the District. All terms and conditions of a permit that are required pursuant to the Clean Air Act (CAA), including provisions to limit potential to emit, are enforceable by the EPA and Citizens under the CAA. Any permit noncompliance constitutes a violation of the CAA and the District Rules and Regulations, and is grounds for enforcement action, for permit termination, revocation, reopening and reissuance, or modification; or for denial of a permit renewal application. [District Rules 2070, 7.0; 2080; and 2520, 9.8.1 and 9.12.1] Federally Enforceable Through Title V Permit
6. {2290} A Permit to Operate or an Authority to Construct shall not be transferred unless a new application is filed with and approved by the District. [District Rule 2031] Federally Enforceable Through Title V Permit
7. {2291} Every application for a permit required under Rule 2010 (12/17/92) shall be filed in a manner and form prescribed by the District. [District Rule 2040] Federally Enforceable Through Title V Permit
8. {2292} The operator shall maintain records of required monitoring that include: 1) the date, place, and time of sampling or measurement; 2) the date(s) analyses were performed; 3) the company or entity that performed the analysis; 4) the analytical techniques or methods used; 5) the results of such analysis; and 6) the operating conditions at the time of sampling or measurement. [District Rule 2520, 9.4.1] Federally Enforceable Through Title V Permit
9. {2293} The operator shall retain records of all required monitoring data and support information for a period of at least 5 years from the date of the monitoring sample, measurement, or report. Support information includes copies of all reports required by the permit and, for continuous monitoring instrumentation, all calibration and maintenance records and all original strip-chart recordings. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate. Any amendments to these Facility-wide Requirements that affect specific Permit Units may constitute modification of those Permit Units.

Facility Name: O'NEILL BEVERAGES CO LLC  
Location: 8418 S LAC JAC AVE, PARLIER, CA 93648  
C-629-0-1: Apr 28 2010 8:57AM - SANDHUG

10. {2294} The operator shall submit reports of any required monitoring at least every six months unless a different frequency is required by an applicable requirement. All instances of deviations from permit requirements must be clearly identified in such reports. [District Rule 2520, 9.5.1] Federally Enforceable Through Title V Permit
11. {2295} Deviations from permit conditions must be promptly reported, including deviations attributable to upset conditions, as defined in the permit. For the purpose of this condition, promptly means as soon as reasonably possible, but no later than 10 days after detection. The report shall include the probable cause of such deviations, and any corrective actions or preventive measures taken. All required reports must be certified by a responsible official consistent with section 10.0 of District Rule 2520 (6/21/01). [District Rules 2520, 9.5.2 and 1100, 7.0] Federally Enforceable Through Title V Permit
12. {2296} If for any reason a permit requirement or condition is being challenged for its constitutionality or validity by a court of competent jurisdiction, the outcome of such challenge shall not affect or invalidate the remainder of the conditions or requirements in that permit. [District Rule 2520, 9.7] Federally Enforceable Through Title V Permit
13. {2297} It shall not be a defense for a permittee in an enforcement action that it would have been necessary to halt or reduce the permitted activity in order to maintain compliance with the conditions of the permit. [District Rule 2520, 9.8.2] Federally Enforceable Through Title V Permit
14. {2298} The permit may be modified, revoked, reopened and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, or termination, or a notification of planned changes or anticipated noncompliance does not stay any permit condition. [District Rule 2520, 9.8.3] Federally Enforceable Through Title V Permit
15. {2299} The permit does not convey any property rights of any sort, or any exclusive privilege. [District Rule 2520, 9.8.4] Federally Enforceable Through Title V Permit
16. {2300} The Permittee shall furnish to the District, within a reasonable time, any information that the District may request in writing to determine whether cause exists for modifying, revoking and reissuing, or terminating the permit or to determine compliance with the permit. Upon request, the permittee shall also furnish to the District copies of records required to be kept by the permit or, for information claimed to be confidential, the permittee may furnish such records directly to EPA along with a claim of confidentiality. [District Rule 2520, 9.8.5] Federally Enforceable Through Title V Permit
17. {2301} The permittee shall pay annual permit fees and other applicable fees as prescribed in Regulation III of the District Rules and Regulations. [District Rule 2520, 9.9] Federally Enforceable Through Title V Permit
18. {2302} Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to enter the permittee's premises where a permitted source is located or emissions related activity is conducted, or where records must be kept under condition of the permit. [District Rule 2520, 9.13.2.1] Federally Enforceable Through Title V Permit
19. {2303} Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to have access to and copy, at reasonable times, any records that must be kept under the conditions of the permit. [District Rule 2520, 9.13.2.2] Federally Enforceable Through Title V Permit
20. {2304} Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to inspect at reasonable times any facilities, equipment, practices, or operations regulated or required under the permit. [District Rule 2520, 9.13.2.3] Federally Enforceable Through Title V Permit
21. {2305} Upon presentation of appropriate credentials, a permittee shall allow an authorized representative of the District to sample or monitor, at reasonable times, substances or parameters for the purpose of assuring compliance with the permit or applicable requirements. [District Rule 2520, 9.13.2.4] Federally Enforceable Through Title V Permit
22. No air contaminants shall be discharged into the atmosphere for a period or periods aggregating more than 3 minutes in any one hour which is as dark or darker than Ringelmann #1 or equivalent to 20% opacity and greater, unless specifically exempted by District Rule 4101 (2/17/05). If the equipment or operation is subject to a more stringent visible emission standard as prescribed in a permit condition, the more stringent visible emission limit shall supersede this condition. [District Rule 4101] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

23. No person shall manufacture, blend, repackage, supply, sell, solicit or apply any architectural coating with a VOC content in excess of the corresponding limit specified in the Table of Standards of District Rule 4601 (12/17/09) for use or sale within the District. [District Rule 4601, 5.1] Federally Enforceable Through Title V Permit
24. All VOC-containing materials for architectural coatings subject to Rule 4601 (12/17/09) shall be stored in closed containers when not in use. [District Rule 4601, 5.4] Federally Enforceable Through Title V Permit
25. The permittee shall comply with all the Labeling and Test Methods requirements outlined in Rule 4601 sections 6.1 and 6.3 (12/17/09). [District Rule 4601, 6.1 and 6.3] Federally Enforceable Through Title V Permit
26. {2310} With each report or document submitted under a permit requirement or a request for information by the District or EPA, the permittee shall include a certification of truth, accuracy, and completeness by a responsible official. [District Rule 2520, 9.13.1 and 10.0] Federally Enforceable Through Title V Permit
27. {2311} If the permittee performs maintenance on, or services, repairs, or disposes of appliances, the permittee shall comply with the standards for Recycling and Emissions Reduction pursuant to 40 CFR 82, Subpart F. [40 CFR 82 Subpart F] Federally Enforceable Through Title V Permit
28. {2312} If the permittee performs service on motor vehicles when this service involves the ozone-depleting refrigerant in the motor vehicle air conditioner (MVAC), the permittee shall comply with the standards for Servicing of Motor Vehicle Air Conditioners pursuant to all the applicable requirements as specified in 40 CFR 82, Subpart B. [40 CFR 82, Subpart B] Federally Enforceable Through Title V Permit
29. Disturbances of soil related to any construction, demolition, excavation, extraction, or other earthmoving activities shall comply with the requirements for fugitive dust control in District Rule 8021 unless specifically exempted under Section 4.0 of Rule 8021 (8/19/04) or Rule 8011 (8/19/04). [District Rules 8011 and 8021] Federally Enforceable Through Title V Permit
30. Outdoor handling, storage and transport of any bulk material which emits dust shall comply with the requirements of District Rule 8031, unless specifically exempted under Section 4.0 of Rule 8031 (8/19/04) or Rule 8011 (8/19/04). [District Rules 8011 and 8031] Federally Enforceable Through Title V Permit
31. An owner/operator shall prevent or cleanup any carryout or trackout in accordance with the requirements of District Rule 8041 Section 5.0, unless specifically exempted under Section 4.0 of Rule 8041 (8/19/04) or Rule 8011 (8/19/04). [District Rules 8011 and 8041] Federally Enforceable Through Title V Permit
32. Whenever open areas are disturbed or vehicles are used in open areas, the facility shall comply with the requirements of Section 5.0 of District Rule 8051, unless specifically exempted under Section 4.0 of Rule 8051 (8/19/04) or Rule 8011 (8/19/04). [District Rules 8011 and 8051] Federally Enforceable Through Title V Permit
33. Any paved road or unpaved road shall comply with the requirements of District Rule 8061 unless specifically exempted under Section 4.0 of Rule 8061 (8/19/04) or Rule 8011 (8/19/04). [District Rules 8011 and Rule 8061] Federally Enforceable Through Title V Permit
34. Any unpaved vehicle/equipment area that anticipates more than 75 vehicle trips per day shall comply with the requirements of Section 5.1.1 of District Rule 8071. Any unpaved vehicle/equipment area that anticipates more than 100 vehicle trips per day shall comply with the requirements of Section 5.1.2 of District Rule 8071. All sources shall comply with the requirements of Section 5.0 of District Rule 8071 unless specifically exempted under Section 4.0 of Rule 8071 (9/16/04) or Rule 8011 (8/19/04). [District Rules 8011 and Rule 8071] Federally Enforceable Through Title V Permit
35. {2319} Any owner or operator of a demolition or renovation activity, as defined in 40 CFR 61.141, shall comply with the applicable inspection, notification, removal, and disposal procedures for asbestos containing materials as specified in 40 CFR 61.145 (Standard for Demolition and Renovation). [40 CFR 61 Subpart M] Federally Enforceable Through Title V Permit

FACILITY-WIDE REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

36. {2320} The permittee shall submit certifications of compliance with the terms and standards contained in Title V permits, including emission limits, standards and work practices, to the District and the EPA annually (or more frequently as specified in an applicable requirement or as specified by the District). The certification shall include the identification of each permit term or condition, the compliance status, whether compliance was continuous or intermittent, the methods used for determining the compliance status, and any other facts required by the District to determine the compliance status of the source. [District Rule 2520, 9.16] Federally Enforceable Through Title V Permit
37. {2321} The permittee shall submit an application for Title V permit renewal to the District at least six months, but not greater than 18 months, prior to the permit expiration date. [District Rule 2520, 5.2] Federally Enforceable Through Title V Permit
38. {2322} When a term is not defined in a Title V permit condition, the definition in the rule cited as the origin and authority for the condition in a Title V permits shall apply. [District Rule 2520, 9.1.1] Federally Enforceable Through Title V Permit
39. {2323} Compliance with permit conditions in the Title V permit shall be deemed in compliance with the following outdated SIP requirements: Rule 401 (Madera, Fresno, Kern, Kings, San Joaquin, Stanislaus, Tulare and Merced), Rule 110 (Fresno, Stanislaus, San Joaquin), Rule 109 (Merced), Rule 113 (Madera), and Rule 111 (Kern, Tulare, Kings). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
40. Compliance with permit conditions in the Title V permit shall be deemed in compliance with the following applicable requirements: SJVUAPCD Rules 1100, sections 6.1 and 7.0 (12/17/92); 2010, sections 3.0 and 4.0 (12/17/92); 2031 (12/17/92); 2040 (12/17/92); 2070, section 7.0 (12/17/92); 2080 (12/17/92); 4101 (2/17/05); 4601, sections 5.1, 5.2, 5.3, 5.8 and 8.0 (12/17/09); 8021 (8/19/04); 8031 (8/19/04); 8041 (8/19/04); 8051 (8/19/04); 8061 (8/19/04); and 8071 (9/16/04). A permit shield is granted from these requirements. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
41. On {MONTH DAY, YEAR}, the initial Title V permit was issued. The reporting periods for the Report of Required Monitoring and the Compliance Certification Report are based upon this initial permit issuance date, unless alternative dates are approved by the District Compliance Division. These reports are due within 30 days after the end of the reporting period. [District Rule 2520] Federally Enforceable Through Title V Permit
42. {98} No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
43. A Three-Year Compliance Plan that demonstrates compliance with the requirements of Section 5.1 of District Rule 4694 for each year of the applicable compliance period shall be submitted to the District by no later than December 1, 2006, and every three years thereafter on or before December 1. [District Rule 4694]
44. A Three-Year Compliance Plan Verification that demonstrates that the Three-Year Compliance Plan elements are in effect shall be submitted to the District by no later than July 1, 2007, and every three years thereafter on or before July 1 [District Rule 4694]
45. An Annual Compliance Plan Demonstration that shows compliance with the applicable requirements of this rule shall be submitted to the District by no later than February 1, 2008, and every year thereafter on or before February 1. [District Rule 4694]
46. Operators using CER to mitigate fermentation emissions shall perform all monitoring and recordkeeping, as established in their approved Three-Year Compliance Plan, and shall maintain all records necessary to demonstrate compliance. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-2-7

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

47.8 MMBTU/HR BABCOCK AND WILCOX NATURAL GAS-FIRED BOILER (SERIAL #NB21232) WITH AN AMERICAN COMBUSTION TECH MODEL ACI-04G LOW NOX BURNER WITH INDUCED FLUE GAS RECIRCULATION

## PERMIT UNIT REQUIREMENTS

1. All equipment shall be maintained in good operating condition and shall be operated in a manner to minimize emissions of air contaminants into the atmosphere. [District Rule 2201] Federally Enforceable Through Title V Permit
2. Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201] Federally Enforceable Through Title V Permit
3. The flue gas recirculation system shall be in operation at all times when the boiler is firing. [District Rule 2201] Federally Enforceable Through Title V Permit
4. The unit shall only be fired on PUC-regulated natural gas. [District Rule 2201] Federally Enforceable Through Title V Permit
5. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of fuel combusted in the unit shall be installed, utilized and maintained. [40 CFR 60.48 (c)(g)] Federally Enforceable Through Title V Permit
6. Emissions rates from the natural gas-fired unit shall not exceed any of the following limits: 9 ppmvd NO<sub>x</sub> @ 3% O<sub>2</sub> or 0.011 lb-NO<sub>x</sub>/MMBtu, 0.00285 lb-SO<sub>x</sub>/MMBtu, 0.0076 lb-PM<sub>10</sub>/MMBtu, 200 ppmvd CO @ 3% O<sub>2</sub> or 0.146 lb-CO/MMBtu, or 0.0055 lb-VOC/MMBtu. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
7. The permittee shall monitor and record the stack concentration of NO<sub>x</sub>, CO, and O<sub>2</sub> at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 2520, 4305, and 4306] Federally Enforceable Through Title V Permit
8. If either the NO<sub>x</sub> or CO concentrations corrected to 3% O<sub>2</sub>, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100, the permittee may fully comply with Rule 1100 in lieu of performing the notification and testing required by this condition. [District Rules 2520, 4305, and 4306] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

9. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 2520, 4305, and 4306] Federally Enforceable Through Title V Permit
10. The permittee shall maintain records of: (1) the date and time of NO<sub>x</sub>, CO, and O<sub>2</sub> measurements, (2) the O<sub>2</sub> concentration in percent and the measured NO<sub>x</sub> and CO concentrations corrected to 3% O<sub>2</sub>, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 2520, 4305, and 4306] Federally Enforceable Through Title V Permit
11. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. No determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4306. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
12. Source testing to measure NO<sub>x</sub> and CO emissions from this unit while fired on natural gas shall be conducted at least once every twelve (12) months. After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months. If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
13. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
14. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
15. NO<sub>x</sub> emissions for source test purposes shall be determined using EPA Method 7E or ARB Method 100 on a ppmv basis, or EPA Method 19 on a heat input basis. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
16. CO emissions for source test purposes shall be determined using EPA Method 10 or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
17. Stack gas oxygen (O<sub>2</sub>) shall be determined using EPA Method 3 or 3A or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
18. A scheduled source test may not be discontinued solely due to the failure of one or more runs to meet applicable standards. [District Rule 1081] Federally Enforceable Through Title V Permit
19. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 1081, 6.1, 4305 and 4306] Federally Enforceable Through Title V Permit
20. In the event that a sample is accidentally lost or conditions occur in which one of three runs must be discontinued because of forced shutdown, failure of an irreplaceable portion of the sampling train, extreme meteorological conditions presenting a hazard to the sampling team, or other circumstances beyond the owner or operators control, upon the APCO's approval, compliance may be determined using the arithmetic mean of the other two runs. [District Rule 1081] Federally Enforceable Through Title V Permit
21. Source sampling to determine the compliance status of an emissions source shall be witnessed or authorized by District personnel. [District Rule 1081] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

22. The results of each source test shall be submitted to the District within 60 days thereafter. Source tests must be submitted for all District authorized compliance source tests regardless of pass, fail or reschedule because of failure status. A District authorized compliance source test shall not be discontinued solely due to the failure of one or more runs to meet applicable standards. [District Rule 1081] Federally Enforceable Through Title V Permit
23. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070, 2520, 4305, and 4306] Federally Enforceable Through Title V Permit
24. The permittee shall keep daily records of the amount of natural gas combusted for a period of five years, and shall make records available for inspection upon request. [District Rule 2520, 9.4.2, and 40 CFR 60.48 (c)(g)] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-4-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

165 BHP CATERPILLAR MODEL 3208 DIESEL-FIRED EMERGENCY IC ENGINE POWERING FIRE PROTECTION EQUIPMENT

## PERMIT UNIT REQUIREMENTS

1. This engine shall be equipped with an operational non-resettable elapsed time meter or other APCO approved alternative. [District Rule 4702 and 17 CCR 93115]
2. Only CARB certified diesel fuel containing not more than 0.0015% sulfur by weight is to be used. [District Rules 2201 and 4801 and 17 CCR 93115] Federally Enforceable Through Title V Permit
3. This engine shall be operated only for maintenance, testing, required regulatory purposes, and during emergency situations. For testing purposes, the engine shall only be operated the number of hours necessary to comply with the testing requirements of the National Fire Protection Association (NFPA) 25 - "Standard for the Inspection, Testing, and Maintenance of Water-Based Fire Protection Systems", 1998 edition. Total hours of operation for all maintenance, testing, and required regulatory purposes shall not exceed 100 hours per calendar year. [District Rule 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
4. The permittee shall maintain monthly records of emergency and non-emergency operation. Records shall include the number of hours of emergency operation, the date and number of hours of all testing and maintenance operations, and the purpose of the operation (for example: load testing, weekly testing, rolling blackout, general area power outage, etc.). For units with automated testing systems, the operator may, as an alternative to keeping records of actual operation for testing purposes, maintain a readily accessible written record of the automated testing schedule. [District Rules 2520 and 4702, and 17 CCR 93115] Federally Enforceable Through Title V Permit
5. The permittee shall maintain monthly records of the type of fuel purchased, the amount of fuel purchased, date when the fuel was purchased, signature of the permittee who received the fuel, and signature of the fuel supplier indicating that the fuel was delivered. [District Rule 2520 and 17 CCR 93115]
6. If this engine is located on the grounds of a K-12 school, or if this engine is located within 500 feet of the property boundary of a K-12 school, the engine shall not be operated for non-emergency purposes, including maintenance and testing, between 7:30 a.m. and 3:30 p.m. on days when school is in session. [17 CCR 93115]
7. If this engine is located on the grounds of a K-12 school, the engine shall not be operated for non-emergency purposes, including maintenance and testing, whenever there is a school sponsored activity. [17 CCR 93115]
8. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 2520 and 4702, and 17 CCR 93115] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-5-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

185 BHP CUMMINS MODEL #V504 DIESEL-FIRED EMERGENCY IC ENGINE POWERING FIRE PROTECTION EQUIPMENT

## PERMIT UNIT REQUIREMENTS

1. This engine shall be equipped with an operational non-resettable elapsed time meter or other APCO approved alternative. [District Rule 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
2. Only CARB certified diesel fuel containing not more than 0.0015% sulfur by weight is to be used. [District Rules 2201 and 4801 and 17 CCR 93115] Federally Enforceable Through Title V Permit
3. This engine shall be operated only for maintenance, testing, required regulatory purposes, and during emergency situations. For testing purposes, the engine shall only be operated the number of hours necessary to comply with the testing requirements of the National Fire Protection Association (NFPA) 25 - "Standard for the Inspection, Testing, and Maintenance of Water-Based Fire Protection Systems", 1998 edition. Total hours of operation for all maintenance, testing, and required regulatory purposes shall not exceed 100 hours per calendar year. [District Rule 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
4. The permittee shall maintain monthly records of emergency and non-emergency operation. Records shall include the number of hours of emergency operation, the date and number of hours of all testing and maintenance operations, and the purpose of the operation (for example: load testing, weekly testing, rolling blackout, general area power outage, etc.). For units with automated testing systems, the operator may, as an alternative to keeping records of actual operation for testing purposes, maintain a readily accessible written record of the automated testing schedule. [District Rules 2520 and 4702, and 17 CCR 93115] Federally Enforceable Through Title V Permit
5. The permittee shall maintain monthly records of the type of fuel purchased, the amount of fuel purchased, date when the fuel was purchased, signature of the permittee who received the fuel, and signature of the fuel supplier indicating that the fuel was delivered. [District Rule 2520 and 17 CCR 93115]
6. If this engine is located on the grounds of a K-12 school, or if this engine is located within 500 feet of the property boundary of a K-12 school, the engine shall not be operated for non-emergency purposes, including maintenance and testing, between 7:30 a.m. and 3:30 p.m. on days when school is in session. [17 CCR 93115]
7. If this engine is located on the grounds of a K-12 school, the engine shall not be operated for non-emergency purposes, including maintenance and testing, whenever there is a school sponsored activity. [17 CCR 93115]
8. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 2520 and 4702, and 17 CCR 93115] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-6-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

185 BHP CUMMINS MODEL #V504 DIESEL-FIRED EMERGENCY IC ENGINE POWERING FIRE PROTECTION EQUIPMENT

## PERMIT UNIT REQUIREMENTS

---

1. This engine shall be equipped with an operational non-resettable elapsed time meter or other APCO approved alternative. [District Rule 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
2. Only CARB certified diesel fuel containing not more than 0.0015% sulfur by weight is to be used. [District Rules 2201 and 4801 and 17 CCR 93115] Federally Enforceable Through Title V Permit
3. This engine shall be operated only for maintenance, testing, required regulatory purposes, and during emergency situations. For testing purposes, the engine shall only be operated the number of hours necessary to comply with the testing requirements of the National Fire Protection Association (NFPA) 25 - "Standard for the Inspection, Testing, and Maintenance of Water-Based Fire Protection Systems", 1998 edition. Total hours of operation for all maintenance, testing, and required regulatory purposes shall not exceed 100 hours per calendar year. [District Rule 4702 and 17 CCR 93115] Federally Enforceable Through Title V Permit
4. The permittee shall maintain monthly records of emergency and non-emergency operation. Records shall include the number of hours of emergency operation, the date and number of hours of all testing and maintenance operations, and the purpose of the operation (for example: load testing, weekly testing, rolling blackout, general area power outage, etc.). For units with automated testing systems, the operator may, as an alternative to keeping records of actual operation for testing purposes, maintain a readily accessible written record of the automated testing schedule. [District Rules 2520 and 4702, and 17 CCR 93115] Federally Enforceable Through Title V Permit
5. The permittee shall maintain monthly records of the type of fuel purchased, the amount of fuel purchased, date when the fuel was purchased, signature of the permittee who received the fuel, and signature of the fuel supplier indicating that the fuel was delivered. [District Rule 2520 and 17 CCR 93115]
6. If this engine is located on the grounds of a K-12 school, or if this engine is located within 500 feet of the property boundary of a K-12 school, the engine shall not be operated for non-emergency purposes, including maintenance and testing, between 7:30 a.m. and 3:30 p.m. on days when school is in session. [17 CCR 93115]
7. If this engine is located on the grounds of a K-12 school, the engine shall not be operated for non-emergency purposes, including maintenance and testing, whenever there is a school sponsored activity. [17 CCR 93115]
8. All records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 2520 and 4702, and 17 CCR 93115] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-11-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

5,967 GALLON STAINLESS STEEL WINE STORAGE TANK CT-1 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-12-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

5,947 GALLON STAINLESS STEEL WINE STORAGE TANK CT-2 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-13-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

8,557 GALLON STAINLESS STEEL WINE STORAGE TANK CT-3 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-14-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

604 GALLON STAINLESS STEEL WINE STORAGE TANK ST-1 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-15-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

604 GALLON STAINLESS STEEL WINE STORAGE TANK ST-2 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-16-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

603 GALLON STAINLESS STEEL WINE STORAGE TANK ST-3 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-17-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,542 GALLON STAINLESS STEEL WINE STORAGE TANK ST-4 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-18-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,542 GALLON STAINLESS STEEL WINE STORAGE TANK ST-5 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-19-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,542 GALLON STAINLESS STEEL WINE STORAGE TANK ST-6 WITH PRESSURE/VACUUM VALVE

**PERMIT UNIT REQUIREMENTS**

---

See facility-wide requirements for permit conditions applicable to this permit unit.

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-20-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,194 GALLON STAINLESS STEEL WINE STORAGE TANK HT-1 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-21-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,192 GALLON STAINLESS STEEL WINE STORAGE TANK HT-2 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-22-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,107 GALLON STAINLESS STEEL WINE STORAGE TANK HT-3 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-23-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,003 GALLON STAINLESS STEEL WINE STORAGE TANK HT-4 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-24-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 1 WITH PRESSURE/VACUUM VALVE

**DRAFT**

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

**DRAFT**

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-25-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 2 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-26-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 3 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-27-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 4 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-28-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 5 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-29-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 6 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-30-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,610 GALLON IRON COATED WINE STORAGE TANK 7 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-31-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,605 GALLON IRON COATED WINE STORAGE TANK 8 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-40-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

9,356 GALLON STAINLESS STEEL WINE STORAGE TANK 17 WITH PRESSURE/VACUUM VALVE

**DRAFT**

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

**DRAFT**

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-41-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

9,339 GALLON STAINLESS STEEL WINE STORAGE TANK 18 WITH PRESSURE/VACUUM VALVE

DRAFT

**PERMIT UNIT REQUIREMENTS**

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-42-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

9,389 GALLON STAINLESS STEEL WINE STORAGE TANK 19 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-43-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 20 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-44-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 21 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-45-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

15,360 GALLON STAINLESS STEEL WINE STORAGE TANK 22 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-52-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

3,426 GALLON STAINLESS STEEL WINE STORAGE TANK 29 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-53-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

3,424 GALLON STAINLESS STEEL WINE STORAGE TANK 30 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-54-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,222 GALLON STAINLESS STEEL WINE STORAGE TANK 33 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-55-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,205 GALLON STAINLESS STEEL WINE STORAGE TANK 34 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-56-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,203 GALLON STAINLESS STEEL WINE STORAGE TANK 35 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-57-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,215 GALLON STAINLESS STEEL WINE STORAGE TANK 36 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-58-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,767 GALLON STAINLESS STEEL WINE STORAGE TANK 37 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-59-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,746 GALLON STAINLESS STEEL WINE STORAGE TANK 38 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-60-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,584 GALLON STAINLESS STEEL WINE STORAGE TANK 39 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-61-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,439 GALLON STAINLESS STEEL WINE STORAGE TANK 40 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-62-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,506 GALLON STAINLESS STEEL WINE STORAGE TANK 101 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-63-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,508 GALLON STAINLESS STEEL WINE STORAGE TANK 102 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-64-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,539 GALLON STAINLESS STEEL WINE STORAGE TANK 103 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-65-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,591 GALLON STAINLESS STEEL WINE STORAGE TANK 104 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-66-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,573 GALLON STAINLESS STEEL WINE STORAGE TANK 105 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-67-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,582 GALLON STAINLESS STEEL WINE STORAGE TANK 106 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-68-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,558 GALLON STAINLESS STEEL WINE STORAGE TANK 107 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-69-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,542 GALLON STAINLESS STEEL WINE STORAGE TANK 108 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-70-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,615 GALLON STAINLESS STEEL WINE STORAGE TANK 109 WITH PRESSURE/VACUUM VALVE

**PERMIT UNIT REQUIREMENTS**

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-71-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,634 GALLON STAINLESS STEEL WINE STORAGE TANK 110 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-72-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,568 GALLON STAINLESS STEEL WINE STORAGE TANK 111 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-73-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,719 GALLON STAINLESS STEEL WINE STORAGE TANK 112 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-74-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,625 GALLON STAINLESS STEEL WINE STORAGE TANK 113 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-75-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,618 GALLON STAINLESS STEEL WINE STORAGE TANK 114 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-76-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,587 GALLON STAINLESS STEEL WINE STORAGE TANK 115 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-77-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,661 GALLON STAINLESS STEEL WINE STORAGE TANK 116 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-78-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,510 GALLON STAINLESS STEEL WINE STORAGE TANK 117 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-79-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,567 GALLON STAINLESS STEEL WINE STORAGE TANK 118 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-80-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,534 GALLON STAINLESS STEEL WINE STORAGE TANK 119 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-81-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,532 GALLON STAINLESS STEEL WINE STORAGE TANK 120 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-82-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,532 GALLON STAINLESS STEEL WINE STORAGE TANK 121 WITH PRESSURE/VACUUM VALVE

**PERMIT UNIT REQUIREMENTS**

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-83-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,532 GALLON STAINLESS STEEL WINE STORAGE TANK 122 WITH PRESSURE/VACUUM VALVE

DRAFT

**PERMIT UNIT REQUIREMENTS**

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-84-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,532 GALLON STAINLESS STEEL WINE STORAGE TANK 123 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-85-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

46,532 GALLON STAINLESS STEEL WINE STORAGE TANK 124 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-86-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

37,469 GALLON STAINLESS STEEL WINE STORAGE TANK 201 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-87-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

37,473 GALLON STAINLESS STEEL WINE STORAGE TANK 202 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-88-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

37,489 GALLON STAINLESS STEEL WINE STORAGE TANK 203 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-89-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

37,251 GALLON STAINLESS STEEL WINE STORAGE TANK 204 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-90-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

37,404 GALLON STAINLESS STEEL WINE STORAGE TANK 205 WITH PRESSURE/VACUUM VALVE

**DRAFT**

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

**DRAFT**

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-91-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

37,439 GALLON STAINLESS STEEL WINE STORAGE TANK 206 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-92-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

278,711 GALLON STAINLESS STEEL WINE STORAGE TANK 207 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-93-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

278,002 GALLON STAINLESS STEEL WINE STORAGE TANK 208 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-94-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

277,996 GALLON STAINLESS STEEL WINE STORAGE TANK 209 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-95-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

277,937 GALLON STAINLESS STEEL WINE STORAGE TANK 210 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-96-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

278,269 GALLON STAINLESS STEEL WINE STORAGE TANK 211 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-97-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

277,590 GALLON STAINLESS STEEL WINE STORAGE TANK 212 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-98-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

277,731 GALLON STAINLESS STEEL WINE STORAGE TANK 213 WITH PRESSURE/VACUUM VALVE

**PERMIT UNIT REQUIREMENTS**

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-99-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

277,429 GALLON STAINLESS STEEL WINE STORAGE TANK 214 WITH PRESSURE/VACUUM VALVE

**PERMIT UNIT REQUIREMENTS**

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-100-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

176,001 GALLON STAINLESS STEEL WINE STORAGE TANK 221

**DRAFT**

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

**DRAFT**

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-101-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

175,781 GALLON STAINLESS STEEL WINE STORAGE TANK 222

**DRAFT**

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

**DRAFT**

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-102-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

175,977 GALLON STAINLESS STEEL WINE STORAGE TANK 223

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-103-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,849 GALLON STAINLESS STEEL WINE STORAGE TANK 241 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-104-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,908 GALLON STAINLESS STEEL WINE STORAGE TANK 242 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-105-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,888 GALLON STAINLESS STEEL WINE STORAGE TANK 243 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-106-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,880 GALLON STAINLESS STEEL WINE STORAGE TANK 244 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-107-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,884 GALLON STAINLESS STEEL WINE STORAGE TANK 245 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-108-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,855 GALLON STAINLESS STEEL WINE STORAGE TANK 246 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-109-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,868 GALLON STAINLESS STEEL WINE STORAGE TANK 247 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-110-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,857 GALLON STAINLESS STEEL WINE STORAGE TANK 248 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-111-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,833 GALLON STAINLESS STEEL WINE STORAGE TANK 249 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-112-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,895 GALLON STAINLESS STEEL WINE STORAGE TANK 250 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-113-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,817 GALLON STAINLESS STEEL WINE STORAGE TANK 251 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-114-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

19,826 GALLON STAINLESS STEEL WINE STORAGE TANK 252 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-115-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,599 GALLON STAINLESS STEEL WINE STORAGE TANK 253 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-116-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,495 GALLON STAINLESS STEEL WINE STORAGE TANK 254 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-117-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,588 GALLON STAINLESS STEEL WINE STORAGE TANK 255 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-118-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,504 GALLON STAINLESS STEEL WINE STORAGE TANK 256 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-119-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,645 GALLON STAINLESS STEEL WINE STORAGE TANK 257 WITH PRESSURE/VACUUM VALVE

**PERMIT UNIT REQUIREMENTS**

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-120-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,565 GALLON STAINLESS STEEL WINE STORAGE TANK 258 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-121-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,632 GALLON STAINLESS STEEL WINE STORAGE TANK 259 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-122-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,667 GALLON STAINLESS STEEL WINE STORAGE TANK 260 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-123-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,569 GALLON STAINLESS STEEL WINE STORAGE TANK 261 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-124-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,533 GALLON STAINLESS STEEL WINE STORAGE TANK 262 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-125-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,677 GALLON STAINLESS STEEL WINE STORAGE TANK 263 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-126-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,648 GALLON STAINLESS STEEL WINE STORAGE TANK 264 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-127-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,620 GALLON STAINLESS STEEL WINE STORAGE TANK 265 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-128-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

12,658 GALLON STAINLESS STEEL WINE STORAGE TANK 266 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-129-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,060 GALLON STAINLESS STEEL WINE STORAGE TANK 267 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-130-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,068 GALLON STAINLESS STEEL WINE STORAGE TANK 268 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-131-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,057 GALLON STAINLESS STEEL WINE STORAGE TANK 269 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-132-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,076 GALLON STAINLESS STEEL WINE STORAGE TANK 270 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-133-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,072 GALLON STAINLESS STEEL WINE STORAGE TANK 271 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-134-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,085 GALLON STAINLESS STEEL WINE STORAGE TANK 272 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-135-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

6,086 GALLON STAINLESS STEEL WINE STORAGE TANK 273 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-136-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

3,092 GALLON STAINLESS STEEL WINE STORAGE TANK 274 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-137-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

3,014 GALLON STAINLESS STEEL WINE STORAGE TANK 275 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-138-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

3,073 GALLON STAINLESS STEEL WINE STORAGE TANK 276 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-139-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

13,231 GALLON STAINLESS STEEL WINE STORAGE TANK 285 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-140-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

13,231 GALLON STAINLESS STEEL WINE STORAGE TANK 286 WITH PRESSURE/VACUUM VALVE

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-141-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

13,231 GALLON STAINLESS STEEL WINE STORAGE TANK 287 WITH PRESSURE/VACUUM VALVE

DRAFT

## PERMIT UNIT REQUIREMENTS

---

1. This tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. The pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. The operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
5. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-142-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,244 GALLON STAINLESS STEEL WINE STORAGE TANK 288

## PERMIT UNIT REQUIREMENTS

---

See facility-wide requirements for permit conditions applicable to this permit unit.

San Joaquin Valley  
Air Pollution Control District

PERMIT UNIT: C-629-143-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

1,245 GALLON STAINLESS STEEL WINE STORAGE TANK 289

DRAFT

**PERMIT UNIT REQUIREMENTS**

---

See facility-wide requirements for permit conditions applicable to this permit unit.

DRAFT

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-144-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,472 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 401

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-145-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,352 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 402

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-146-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,276 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 403

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-147-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,259 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 404

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** C-629-148-1

**EXPIRATION DATE:** 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,359 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 405

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-149-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,479 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 406

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-150-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,673 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK  
407

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-151-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,500 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK  
408

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-152-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

39,626 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK  
409

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-153-1

EXPIRATION DATE: 07/31/2012

**EQUIPMENT DESCRIPTION:**

40,407 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK  
410

## PERMIT UNIT REQUIREMENTS

---

1. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
2. Separate annual records each of total red wine and total white wine produced by fermentation at this facility, based on values reported to the Alcohol and Tobacco Tax and Trade Bureau (TTB), U.S. Department of the Treasury, shall be kept. [District Rule 4694]
3. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
4. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.