

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-171-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,503 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 504

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-172-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,350 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 505

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-173-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,275 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 506

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-174-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,349 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
507

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-175-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,242 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
508

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-176-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

38,991 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
509

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-177-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

39,311 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
510

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-178-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

39,232 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
511

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-179-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

39,414 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
512

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-180-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

39,333 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
513

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-181-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

39,168 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
514

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-182-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

39,107 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
515

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-183-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

38,996 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
516

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-184-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,350 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
517

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-185-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,389 GALLON CONCRETE ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK
518

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-186-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,379 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 519

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-187-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,782 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 520

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-188-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,280 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 521

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-189-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,281 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 522

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-190-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,420 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 523

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-191-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

40,513 GALLON CONCRETE ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 524

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-192-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
601 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-193-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
602 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-194-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

192,508 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
603

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-195-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

192,569 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
604

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-196-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,569 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
605

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-197-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

192,008 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
606

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-198-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,500 GALLON STEEL WHITE WINE FERMENTATION AND WINE STORAGE TANK 607 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
6. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-199-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,500 GALLON STEEL WHITE WINE FERMENTATION AND WINE STORAGE TANK 608 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
6. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-200-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,500 GALLON STEEL WHITE WINE FERMENTATION AND WINE STORAGE TANK 609 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
6. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-201-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,500 GALLON STEEL WHITE WINE FERMENTATION AND WINE STORAGE TANK 610 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
6. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-202-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

192,493 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
611

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-203-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

192,569 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
612

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-204-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

192,569 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
613

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-205-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

192,619 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
614

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-206-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,500 GALLON STEEL WHITE WINE FERMENTATION AND WINE STORAGE TANK 615 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
6. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-207-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,500 GALLON STEEL WHITE WINE FERMENTATION AND WINE STORAGE TANK 616 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. When used for wine storage, this tank shall be equipped with and operated with a pressure-vacuum relief valve, which shall operate within 10% of the maximum allowable working pressure of the tank, operate in accordance with the manufacturer's instructions, and be permanently labeled with the operating pressure settings. [District Rule 4694]
2. When this tank is used for wine storage, the pressure-vacuum relief valve and storage tank shall remain in a gas-tight condition, except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rule 4694]
3. The temperature of the wine stored in this tank shall be maintained at or below 75 degrees Fahrenheit. The temperature of the stored wine shall be determined and recorded at least once per week. For each batch of wine, the operator shall achieve the storage temperature of 75 degrees Fahrenheit or less within 60 days after completing fermentation, and shall maintain records to show when the required storage temperature of 75 degrees Fahrenheit or less was achieved. [District Rule 4694]
4. For each batch of must fermented in this tank, the operator shall record the fermentation completion date, the total gallons of must fermented, the average fermentation temperature and the uncontrolled fermentation emissions and fermentation emission reductions (calculated per the emission factors given in District Rule 4694). The information shall be recorded by the tank Permit to Operate number and by wine type, stated as either red wine or white wine. [District Rule 4694]
5. When this tank is used for wine storage, the operator shall record, on a weekly basis, the total gallons of wine contained in the tank and the maximum temperature of the stored wine. [District Rule 4694]
6. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-208-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,125 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
617 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-209-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,555 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
618 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-210-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,219 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
620 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-211-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

195,462 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
621 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-212-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

223,387 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 801 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-213-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

223,736 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 802 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-214-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

223,682 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 803 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-215-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

223,910 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 804.

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-216-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

223,766 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 805

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-217-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

223,782 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 806

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-218-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

231,127 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 807 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-219-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

231,127 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 808 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-220-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

231,127 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 809 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-221-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

231,127 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 810 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-222-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

231,127 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 811 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-223-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

230,867 GALLON STAINLESS STEEL ENCLOSED TOP RED AND WHITE WINE FERMENTATION AND WINE STORAGE TANK 812 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-224-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,255 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 813

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-225-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,238 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 814

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-226-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,399 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 815

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-227-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,246 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 816

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-228-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,731 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 817

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-229-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,691 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 818

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-230-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

47,049 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 819

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-231-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

47,049 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 820

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-232-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,637 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 821

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-233-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,609 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 822

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-234-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,520 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 823

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-235-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,608 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 824

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-236-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,619 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 825

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-237-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

46,535 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 826

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-238-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

14,251 GALLON STAINLESS STEEL ENCLOSED TOP WINE STORAGE TANK 827

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-239-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

12,495 GALLON STAINLESS STEEL ENCLOSED TOP WINE STORAGE TANK 828 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-240-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
901 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-241-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
902 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-242-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
903 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-243-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
904 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-244-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
905 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-245-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

351,049 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
906 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-246-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
907 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-247-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
908 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-248-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
909 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-249-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
910 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-250-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
911 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-251-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
912 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-252-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
913 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-253-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
914 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-254-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

350,698 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
915 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-255-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

13,392 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP1

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-256-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

14,996 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP2

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-257-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

15,180 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP3

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-258-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

14,764 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP4

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-259-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

13,704 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP5

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-260-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

14,801 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP6

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-261-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

19,402 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP7

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-262-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

19,401 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP8

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-263-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

19,406 GALLON CONCRETE OPEN WINE STORAGE TANK SUMP9

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-264-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

6,500 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 1003 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-265-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

6,500 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 1004 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-266-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

6,500 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK 1005 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-267-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

13,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1006 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-268-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

13,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1007 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-269-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

13,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1008 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-270-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

13,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1009 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-271-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

13,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1010 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-272-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

32,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1011 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-273-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

32,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1012 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-274-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

32,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1013 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-275-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

32,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1014 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-276-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

64,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1015 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-277-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

64,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1016 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-278-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

64,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1017 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-279-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

64,000 GALLON STAINLESS STEEL ENCLOSED TOP WHITE WINE FERMENTATION AND WINE STORAGE TANK
1018 WITH PRESSURE/VACUUM VALVE

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

**San Joaquin Valley
Air Pollution Control District**

PERMIT UNIT: C-629-280-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

10,535 GALLON PLASTIC ENCLOSED TOP WINE STORAGE TANK 3000

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-281-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

10,535 GALLON PLASTIC ENCLOSED TOP WINE STORAGE TANK 3001

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. No air contaminant shall be discharged into the atmosphere for a period or periods aggregating more than three minutes in any one hour which is as dark as, or darker than, Ringelmann 1 or 20% opacity. [District Rule 4101]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-282-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

66,000 BARREL CAPACITY BRANDY STORAGE AND AGING OPERATION (WAREHOUSES 1 & 2) SERVED BY A 0.289 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 1.0 RTO95 REGENERATIVE THERMAL OXIDIZER AND A 1.7 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 6.0 RTO95 REGENERATIVE THERMAL OXIDIZER

PERMIT UNIT REQUIREMENTS

1. Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201]
2. All brandy storage and aging operations at this facility shall only be performed in warehouses listed in permit units C-629-282 or C-629-283. [District Rules 2201 and 4694]
3. On or before June 22, 2010, this facility may elect to discontinue use of the VOC control system by giving written notice to the District. Such notice shall be given no less than 30 days prior to the planned discontinuance of operation of the system. Upon such notice, the District will administratively revise the permit conditions as noted to allow operation without a VOC control device. [District Rule 2201]
4. Only natural gas or LPG shall be used as fuel for the combustion of VOC. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
5. The brandy storage enclosure and regenerative thermal oxidation system shall be maintained in proper operating condition at all times. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
6. The VOC control system shall remain in operation at all times except for periods of routine maintenance which require shutdown. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
7. The facility shall notify the District of any occurrence which constitutes a breakdown condition of the VOC control system pursuant to District Rule 1100. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District NSR Rule and District Rule 1100]
8. Manway access doors are defined as doors with a maximum opening of 21 square feet, intended solely for occasional personnel access to the warehouse for maintenance or monitoring activities. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
9. Non-manway access doors are defined as openings equipped with roll-up doors which are required to allow routine movement of brandy into and out of the warehouse or for warehouse access with wheeled and motorized maintenance equipment. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

10. All openings in the warehouse enclosures which may be opened during "normal operation" of the VOC control system and which do not qualify as manway access doors or non-manway access doors shall be considered to be Natural Draft Openings (NDO) for purposes of certification of the enclosure as a Permanent Total Enclosure pursuant to U.S. EPA Method 204. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
11. "Normal operation" is defined for each warehouse building enclosure as operation with the enclosure meeting the minimum requirements for a permanent total enclosure pursuant to EPA Method 204 (with the fan inlet pressure operating with a vacuum at or higher than the minimum allowed vacuum and all non-manway access doors closed) and the regenerative thermal oxidizer system fully operational with the combustion chamber temperature at or above 1400 degrees F. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
12. The facility shall be equipped with a continuous monitoring system to monitor, at a minimum, the status of the fan inlet pressure control, all non-manway access doors and the combustion chamber temperature of each in-service RTO. Actual hours of "normal operation" shall be continuously and automatically monitored and recorded for each warehouse building enclosure. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
13. Warehouses 1 and 2 shall be certified and maintained as Permanent Total Enclosures (PTE) pursuant to U.S. EPA Method 204. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
14. Certification of warehouses 1 and 2 as Permanent Total Enclosures shall be performed by a District-approved independent certifying entity. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
15. Each manway access door shall be equipped with an automatic closure device to minimize the time that the door is open. Manway access doors shall be opened only as required for access to or exit from the enclosure, minimizing the duration of the opening, and shall not be propped open. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
16. Each non-manway access opening shall be equipped with a motor-actuated door and controls which will minimize the time the door remains open during access and exit and shall be integrated with the continuous monitoring system to record the time periods that the door is open. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
17. The fan inlet pressure control point shall be equipped with a continuous pressure monitor integrated with the facility's continuous monitoring system to continuously record the actual fan inlet vacuum. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
18. The measured vacuum at the fan inlet pressure control point shall not be less than the established minimum allowable vacuum during "normal operation". This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

19. Each month the facility shall demonstrate that control of the ID fan inlet pressure at or above the established minimum allowable vacuum is adequate to simultaneously maintain the qualification of all enclosures (warehouses 1 and 2) as Permanent Total Enclosures pursuant to EPA Method 204 by manually measuring and recording facial velocity at the test port opening on each warehouse building enclosure and confirming a minimum facial velocity of 200 feet per minute at each port. If a velocity less than 200 feet per minute is determined, operating adjustments shall be made as required to increase the measured facial velocity to 200 feet per minute within 24 hours of the initial measurement. If the permittee is unable to demonstrate a minimum facial velocity of 200 feet per minute within 48 hours after initial measurement, permittee shall notify the APCO within 72 hours of the initial measurement. After 12 consecutive months of demonstrating the adequacy of the established minimum allowable vacuum, the monitoring frequency can be reduced to once per quarter per warehouse building enclosure. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
20. The induced draft fan and RTO serving the warehouse building enclosures shall be adequately sized to simultaneously maintain "normal operation" for both warehouses 1 and 2 during periods of maximum brandy loss from the storage and aging operation. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
21. At least one regenerative thermal oxidizer shall operate at all times except when both are down for routine maintenance. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
22. The minimum allowable vacuum at the fan inlet pressure control point, adequate to ensure maintenance of a continuous negative pressure on all warehouse storage enclosures as required to simultaneously qualify all enclosures as Permanent Total Enclosures pursuant to EPA Method 204, shall be demonstrated and recorded annually. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
23. Each regenerative thermal oxidizer shall be equipped with a dedicated isolation damper to isolate it from the brandy warehouse when not in operation. The isolation damper shall not be opened unless the regenerative thermal oxidizer it serves is fully operational with a combustion chamber temperature not less than 1400 F. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
24. Each regenerative thermal oxidizer shall be equipped with an operational temperature gauge to indicate the temperature of the combustion chamber. A continuously recording device integrated with the facility's continuous monitoring system shall be utilized to indicate the combustion chamber temperature during operation. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
25. Each regenerative thermal oxidizer shall operate with a combustion chamber temperature of not less than 1400 F when its isolation damper is open to the warehouse. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
26. The VOC destruction efficiency of each regenerative thermal oxidizer shall not be less than 98%. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
27. Routine scheduled maintenance which requires shutdown of either of the regenerative thermal oxidizers shall not be performed during the months of July, August, or September without prior written approval of the District. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
28. Total annual evaporative emissions from brandy shall not exceed 51,353 lb-VOC/year. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

29. For any calendar year, total evaporative brandy VOC emissions shall be quantified by the sum of the evaporative brandy VOC emissions emitted to the atmosphere from each warehouse building enclosure. Evaporative losses from each warehouse building enclosure shall be calculated by the following formula: Evaporative Brandy VOC Emissions (tons/year-enclosure) = Uncontrolled Emissions (tons/year-enclosure) x Control Factor. Uncontrolled Emissions = the average enclosure inventory for the calendar year (bbls/enclosure) x the measured brandy loss per barrel for the calendar year in the enclosure (PG/bbl-year) x 3.31 lb-VOC/PG. The Control Factor for the calendar year = $(8,760 - 0.98 \times H) / 8,760$, where H is hours of "normal operation" for the enclosure (as defined in this permit) recorded for the calendar year. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
30. Combined VOC emissions from the exhaust of the regenerative thermal oxidizers shall not exceed 144.4 lb/day during "normal operation". This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
31. The emissions from the combustion of natural gas or LPG shall not exceed any of the following limits: 0.15 lb-NO_x/MMBtu, 0.084 lb-CO/MMBtu, 0.0076 lb-PM₁₀/MMBtu, 0.0055 lb-VOC/MMBtu, or 0.0164 lb-SO_x/MMBtu. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
32. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
33. The results of each source test shall be submitted to the District within 60 days thereafter. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 1081]
34. This unit shall be tested for compliance with VOC emissions limits at least once every 12 months. After demonstrating compliance on two consecutive annual source tests, the unit shall be tested not less than once every thirty-six months. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
35. VOC emissions for source test purposes shall be determined using US EPA Method 25 or Method 18 or BAAQMD ST-32, except when the outlet concentration must be below 50 ppmv in order to meet the standard, in which case US EPA Method 25a may be used. VOC emissions during the source test shall be calculated as the arithmetic average of three 30-consecutive-minute test runs. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
36. Daily and annual records of the hours of operation shall be kept, indicating the time and duration of all periods of outage for the VOC control system including maintenance. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
37. Records shall be kept of all maintenance activities requiring a shutdown of a regenerative thermal oxidizer, including the maintenance activity, time and date of shutdown of the regenerative thermal oxidizer, and the duration of the shutdown. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
38. Records of all required monitoring including facial velocity measurements and annual evaporative VOC emissions shall be maintained. [District Rule 2201]
39. Daily and annual records of the number of barrels in each warehouse storage enclosure shall be kept. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

40. Records of all barrel filling and dumping operations shall be kept, recording the proof gallons placed into storage, the proof gallons removed from storage, the proof gallons lost while in storage and the date of each action. Annual summaries of all filling and dumping operations shall be maintained to allow annual determination of total proof-gallons lost from each warehouse building enclosure. All gauging of distilled spirits shall be in accordance with the methods and procedures of the Gauging Manual of the Alcohol and Tobacco Tax and Trade Bureau, Department of the Treasury (27 CFR 30). [District Rule 2201]
41. All records shall be retained for a minimum of five years, and shall be made available for District inspection upon request. [District Rule 2201]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-283-3

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

66,000 BARREL CAPACITY BRANDY STORAGE AND AGING OPERATION (WAREHOUSES 3 & 4) SERVED BY A 0.289 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 1.0 RTO95 REGENERATIVE THERMAL OXIDIZER AND A 1.7 MMBTU/HR ADWEST TECHNOLOGIES MODEL RETOX 6.0 RTO95 REGENERATIVE THERMAL OXIDIZER

PERMIT UNIT REQUIREMENTS

1. Particulate matter emissions shall not exceed 0.1 grains/dscf in concentration. [District Rule 4201]
2. All brandy storage and aging operations at this facility shall only be performed in warehouses listed in permit units C-629-282 or C-629-283. [District Rules 2201 and 4694]
3. On or before June 22, 2010, this facility may elect to discontinue use of the VOC control system by giving written notice to the District. Such notice shall be given no less than 30 days prior to the planned discontinuance of operation of the system. Upon such notice, the District will administratively revise the permit conditions as noted to allow operation without a VOC control device. [District Rule 2201]
4. Only natural gas or LPG shall be used as fuel for the combustion of VOC. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
5. The brandy storage enclosure and regenerative thermal oxidation system shall be maintained in proper operating condition at all times. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
6. The VOC control system shall remain in operation at all times except for periods of routine maintenance which require shutdown. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
7. The facility shall notify the District of any occurrence which constitutes a breakdown condition of the VOC control system pursuant to District Rule 1100. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District NSR Rule and District Rule 1100]
8. Manway access doors are defined as doors with a maximum opening of 21 square feet, intended solely for occasional personnel access to the warehouse for maintenance or monitoring activities. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
9. Non-manway access doors are defined as openings equipped with roll-up doors which are required to allow routine movement of brandy into and out of the warehouse or for warehouse access with wheeled and motorized maintenance equipment. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

10. All openings in the warehouse enclosures which may be opened during "normal operation" of the VOC control system and which do not qualify as manway access doors or non-manway access doors shall be considered to be Natural Draft Openings (NDO) for purposes of certification of the enclosure as a Permanent Total Enclosure pursuant to U.S. EPA Method 204. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
11. "Normal operation" is defined for each warehouse building enclosure as operation with the enclosure meeting the minimum requirements for a permanent total enclosure pursuant to EPA Method 204 (with the fan inlet pressure operating with a vacuum at or higher than the minimum allowed vacuum and all non-manway access doors closed) and the regenerative thermal oxidizer system fully operational with the combustion chamber temperature at or above 1400 degrees F. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
12. The facility shall be equipped with a continuous monitoring system to monitor, at a minimum, the status of the fan inlet pressure control, all non-manway access doors and the combustion chamber temperature of each in-service RTO. Actual hours of "normal operation" shall be continuously and automatically monitored and recorded for each warehouse building enclosure. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
13. Warehouses 3 and 4 shall be certified and maintained as Permanent Total Enclosures (PTE) pursuant to U.S. EPA Method 204. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
14. Certification of warehouses 3 and 4 as Permanent Total Enclosures shall be performed by a District-approved independent certifying entity. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
15. Each manway access door shall be equipped with an automatic closure device to minimize the time that the door is open. Manway access doors shall be opened only as required for access to or exit from the enclosure, minimizing the duration of the opening, and shall not be propped open. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
16. Each non-manway access opening shall be equipped with a motor-actuated door and controls which will minimize the time the door remains open during access and exit and shall be integrated with the continuous monitoring system to record the time periods that the door is open. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
17. The fan inlet pressure control point shall be equipped with a continuous pressure monitor integrated with the facility's continuous monitoring system to continuously record the actual fan inlet vacuum. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
18. The measured vacuum at the fan inlet pressure control point shall not be less than the established minimum allowable vacuum during "normal operation". This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

19. Each month the facility shall demonstrate that control of the ID fan inlet pressure at or above the established minimum allowable vacuum is adequate to simultaneously maintain the qualification of all enclosures (warehouses 3 and 4) as Permanent Total Enclosures pursuant to EPA Method 204 by manually measuring and recording facial velocity at the test port opening on each warehouse building enclosure and confirming a minimum facial velocity of 200 feet per minute at each port. If a velocity less than 200 feet per minute is determined, operating adjustments shall be made as required to increase the measured facial velocity to 200 feet per minute within 24 hours of the initial measurement. If the permittee is unable to demonstrate a minimum facial velocity of 200 feet per minute within 48 hours after initial measurement, permittee shall notify the APCO within 72 hours of the initial measurement. After 12 consecutive months of demonstrating the adequacy of the established minimum allowable vacuum, the monitoring frequency can be reduced to once per quarter per warehouse building enclosure. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
20. The induced draft fan and RTO serving the warehouse building enclosures shall be adequately sized to simultaneously maintain "normal operation" for both warehouses 1 and 2 during periods of maximum brandy loss from the storage and aging operation. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
21. At least one regenerative thermal oxidizer shall operate at all times except when both are down for routine maintenance. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
22. The minimum allowable vacuum at the fan inlet pressure control point, adequate to ensure maintenance of a continuous negative pressure on all warehouse storage enclosures as required to simultaneously qualify all enclosures as Permanent Total Enclosures pursuant to EPA Method 204, shall be demonstrated and recorded annually. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
23. Each regenerative thermal oxidizer shall be equipped with a dedicated isolation damper to isolate it from the brandy warehouse when not in operation. The isolation damper shall not be opened unless the regenerative thermal oxidizer it serves is fully operational with a combustion chamber temperature not less than 1400 F. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
24. Each regenerative thermal oxidizer shall be equipped with an operational temperature gauge to indicate the temperature of the combustion chamber. A continuously recording device integrated with the facility's continuous monitoring system shall be utilized to indicate the combustion chamber temperature during operation. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rules 1080 and 2201]
25. Each regenerative thermal oxidizer shall operate with a combustion chamber temperature of not less than 1400 F when its isolation damper is open to the warehouse. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
26. The VOC destruction efficiency of each regenerative thermal oxidizer shall not be less than 98%. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
27. Routine scheduled maintenance which requires shutdown of either of the regenerative thermal oxidizers shall not be performed during the months of July, August, or September without prior written approval of the District. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
28. Total annual evaporative emissions from brandy shall not exceed 51,353 lb-VOC/year. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

29. For any calendar year, total evaporative brandy VOC emissions shall be quantified by the sum of the evaporative brandy VOC emissions emitted to the atmosphere from each warehouse building enclosure. Evaporative losses from each warehouse building enclosure shall be calculated by the following formula: Evaporative Brandy VOC Emissions (tons/year-enclosure) = Uncontrolled Emissions (tons/year-enclosure) x Control Factor. Uncontrolled Emissions = the average enclosure inventory for the calendar year (bbls/enclosure) x the measured brandy loss per barrel for the calendar year in the enclosure (PG/bbl-year) x 3.31 lb-VOC/PG. The Control Factor for the calendar year = $(8,760 - 0.98 \times H) / 8,760$, where H is hours of "normal operation" for the enclosure (as defined in this permit) recorded for the calendar year. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
30. Combined VOC emissions from the exhaust of the regenerative thermal oxidizers shall not exceed 144.4 lb/day during "normal operation". This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
31. The emissions from the combustion of natural gas or LPG shall not exceed any of the following limits: 0.15 lb-NO_x/MMBtu, 0.084 lb-CO/MMBtu, 0.0076 lb-PM₁₀/MMBtu, 0.0055 lb-VOC/MMBtu, or 0.0164 lb-SO_x/MMBtu. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
32. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
33. The results of each source test shall be submitted to the District within 60 days thereafter. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 1081]
34. This unit shall be tested for compliance with VOC emissions limits at least once every 12 months. After demonstrating compliance on two consecutive annual source tests, the unit shall be tested not less than once every thirty-six months. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
35. VOC emissions for source test purposes shall be determined using US EPA Method 25 or Method 18 or BAAQMD ST-32, except when the outlet concentration must be below 50 ppmv in order to meet the standard, in which case US EPA Method 25a may be used. VOC emissions during the source test shall be calculated as the arithmetic average of three 30-consecutive-minute test runs. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
36. Daily and annual records of the hours of operation shall be kept, indicating the time and duration of all periods of outage for the VOC control system including maintenance. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
37. Records shall be kept of all maintenance activities requiring a shutdown of a regenerative thermal oxidizer, including the maintenance activity, time and date of shutdown of the regenerative thermal oxidizer, and the duration of the shutdown. This condition may be deleted from the permit on or before June 22, 2010, upon written notification to the District of intent to discontinue operation of the VOC control system. [District Rule 2201]
38. Records of all required monitoring including facial velocity measurements and annual evaporative VOC emissions shall be maintained. [District Rule 2201]
39. Daily and annual records of the number of barrels in each warehouse storage enclosure shall be kept. [District Rule 2201]

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE
These terms and conditions are part of the Facility-wide Permit to Operate.

40. Records of all barrel filling and dumping operations shall be kept, recording the proof gallons placed into storage, the proof gallons removed from storage, the proof gallons lost while in storage and the date of each action. Annual summaries of all filling and dumping operations shall be maintained to allow annual determination of total proof-gallons lost from each warehouse building enclosure. All gauging of distilled spirits shall be in accordance with the methods and procedures of the Gauging Manual of the Alcohol and Tobacco Tax and Trade Bureau, Department of the Treasury (27 CFR 30). [District Rule 2201]
41. All records shall be retained for a minimum of five years, and shall be made available for District inspection upon request. [District Rule 2201]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-284-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

60,000 GALLON STAINLESS STEEL WINE AND DISTILLED SPIRIT STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 301)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 96.0 percent by volume. [District Rule 2201]
7. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 60,000 gallons in any one day or 800,000 gallons per year. [District Rule 2201]
9. Total throughput for permit units C-629-284, '-285, '286, '-287 and '-288 shall not exceed 3,318,000 gallons per year. [District Rule 2201]
10. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-285-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

60,000 GALLON STAINLESS STEEL WINE AND DISTILLED SPIRIT STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 302)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 96.0 percent by volume. [District Rule 2201]
7. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 60,000 gallons in any one day or 800,000 gallons per year. [District Rule 2201]
9. Total throughput for permit units C-629-284, '-285, '286, '-287 and '-288 shall not exceed 3,318,000 gallons per year. [District Rule 2201]
10. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-286-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

60,000 GALLON STAINLESS STEEL WINE AND DISTILLED SPIRIT STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 303)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 96.0 percent by volume. [District Rule 2201]
7. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 60,000 gallons in any one day or 800,000 gallons per year. [District Rule 2201]
9. Total throughput for permit units C-629-284, '-285, '286, '-287 and '-288 shall not exceed 3,318,000 gallons per year. [District Rule 2201]
10. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-287-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

60,000 GALLON STAINLESS STEEL WINE AND DISTILLED SPIRIT STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 304)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 96.0 percent by volume. [District Rule 2201]
7. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 60,000 gallons in any one day or 800,000 gallons per year. [District Rule 2201]
9. Total throughput for permit units C-629-284, '-285, '286, '-287 and '-288 shall not exceed 3,318,000 gallons per year. [District Rule 2201]
10. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-288-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE AND DISTILLED SPIRIT STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 305)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 96.0 percent by volume. [District Rule 2201]
7. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 60,000 gallons in any one day or 800,000 gallons per year. [District Rule 2201]
9. Total throughput for permit units C-629-284, '-285, '286, '-287 and '-288 shall not exceed 3,318,000 gallons per year. [District Rule 2201]
10. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-289-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 306)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-290-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 307)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-291-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 308)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-292-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 309)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-293-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 310)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-294-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 311)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-295-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 312)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-296-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 313)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-297-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 314)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-298-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 315)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-299-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 316)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-300-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 317)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-301-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 318)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-302-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

190,000 GALLON STAINLESS STEEL WINE STORAGE TANK WITH PRESSURE VACUUM VALVE (TANK 319)

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
3. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
4. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
5. This tank shall not be used for fermentation of wine or other alcoholic beverages. [District Rule 2201]
6. Ethanol content of wine in this tank shall not exceed 13.9 percent by volume. [District Rule 2201]
7. Temperature of all wine placed, stored, or held in tank shall not exceed 75 °F. [District Rules 2201 and 4694]
8. Tank throughput shall not exceed either of the following limits: 190,000 gallons in any one day or 1,200,000 gallons per year. [District Rule 2201]
9. Records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rules 2201 and 4694]
10. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
11. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
12. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rules 2201 and 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-303-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE (TANK # R-2017) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-304-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE TANK (TANK # R-2018) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-305-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE (TANK # R-2019) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-306-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE TANK (TANK # R-2020) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-307-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE (TANK # R-2001) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-308-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE (TANK # R-2002) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-309-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE (TANK # R-2003) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-310-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE (TANK # R-2004) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-311-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE TANK (TANK # R-2005) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-312-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE TANK (TANK # R-2012) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-313-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE TANK (TANK # R-2013) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-314-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE TANK (TANK # R-2014) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-315-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE TANK (TANK R-2015) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-316-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

45,500 GALLON STEEL WINE STORAGE TANK (TANK R-2016) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 45,500 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-317-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE TANK (TANK R-2023) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-318-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE TANK (TANK R-2024) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-319-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE TANK (TANK R-2025) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

San Joaquin Valley Air Pollution Control District

PERMIT UNIT: C-629-320-0

EXPIRATION DATE: 07/31/2012

EQUIPMENT DESCRIPTION:

121,000 GALLON STEEL WINE STORAGE TANK (TANK R-2026) WITH PRESSURE/VACUUM VALVE AND INSULATION

PERMIT UNIT REQUIREMENTS

1. No air contaminant shall be released into the atmosphere which causes a public nuisance. [District Rule 4102]
2. Ethanol content of wine in this tank shall not exceed 14.5 percent by volume. [District Rule 2201]
3. Tank throughput shall not exceed 121,000 gallons in any one day. [District Rule 2201]
4. Combined throughput of permits C-629-303 through C-629-320 shall not exceed 5,946,600 gallons per year. [District Rule 2201]
5. The wine storage tank shall be equipped and operated with a pressure-vacuum relief valve, set to operate within 10% of the maximum allowable working pressure of the tank and permanently labeled with the operating pressure settings. [District Rules 2201 and 4694]
6. The pressure-vacuum relief valve shall be installed and operated in accordance with the manufacturer's instructions. [District Rules 2201 and 4694]
7. The pressure-vacuum relief valve and wine storage tank shall remain in a gas-tight condition except when the operating pressure of the tank exceeds the valve set pressure. A gas-tight condition shall be determined by measuring the gas leak in accordance with the procedures in EPA Method 21. [District Rules 2201 and 4694]
8. The temperature of each batch of wine placed, stored, or held in the tank shall not exceed 75 degrees F after 60 days following completion of fermentation. [District Rule 4694]
9. Daily records of filling and emptying operations shall be kept for this tank including the date of the operation, a unique identifier for each batch, the volume percent ethanol in the batch and the volume of wine transferred. [District Rule 4694]
10. Annual records of wine throughput shall be kept. [District Rule 2201]
11. The wine batch identifier and volume stored in the tank shall be recorded weekly. [District Rule 4694]
12. The maximum temperature of the each batch of wine placed, stored, or held in the tank shall be recorded weekly. [District Rule 4694]
13. All records shall be retained on-site for a period of at least five years and made available for District inspection upon request. [District Rule 4694]

These terms and conditions are part of the Facility-wide Permit to Operate.

Attachment D

Template Qualification Form


Title V General Permit Template Qualification Form
for
Facility-wide Umbrella General Permit Template

District facility ID # C-629

To use this template, remove this sheet and attach to application. The conditions outlined in this template will be placed on your Title V permit.

Any facility may use this facility-wide template as part of its Title V application.

Based on information and belief formed after reasonable inquiry: 1) the information on this form is true and correct and 2) the facility certifies compliance with this template's permit conditions.

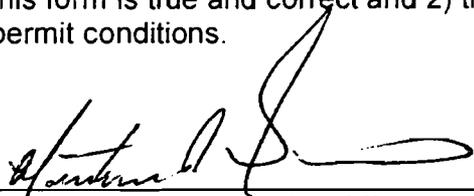

Signature of Responsible Official

10/16/2007

Date

Matthew Towers

Name of Responsible Official (Please Print)

Attachment E

Template Rule Update Comparison

Comparative Analysis of the Current SIP Version (amended August 19, 2004) of District Rule 8011 with the Previous SIP Version (adopted November 15, 2001)

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
2.0 APPLICABILITY		
The provisions of this rule are applicable to specified outdoor fugitive dust sources. The definitions, exemptions, requirements, administrative requirements, recordkeeping requirements, and test methods set forth in this rule are applicable to all Rules under Regulation VIII (Fugitive PM10 Prohibitions) of the Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. The provisions of this rule shall be effective on and after May 15, 2002.	X	
The provisions of this rule are applicable to specified outdoor fugitive dust sources. The definitions, exemptions, requirements, administrative requirements, recordkeeping requirements, and test methods set forth in this rule are applicable to all Rules under Regulation VIII (Fugitive PM10 Prohibitions) of the Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. The provisions of this rule adopted on November 15, 2001 shall remain in effect until October 1, 2004 at which time the amendments adopted on August 19, 2004 shall take effect.		X
3.0 DEFINITIONS		
Event material: wind, storm, or water erosion and runoff resulting in the accumulation of mud, soil, or other material onto a public paved road surface travel lane or shoulder.		Added
Gravel Pad: a layer of washed gravel, rock, or crushed rock which is at least one inch or larger in diameter and six inches deep, located at the point of intersection of a paved public roadway and a work site exit, and maintained to dislodge mud, dirt, and/or debris from the tires of motor vehicles and/or haul trucks, prior to exiting the work site.	X	
Gravel Pad: a layer of washed gravel, rock, or crushed rock located at the point of intersection of a paved public roadway and an unpaved work site exit, and maintained to dislodge mud, dirt, and/or debris from the tires of motor vehicles and/or haul trucks, prior to exiting the work site.		X
Modified Road: any road that is widened or improved so as to increase traffic capacity or that has been reconstructed. This term does not include road maintenance, repair, chip seal, or surface overlay work.	X	
Modified Road: any road that is widened or improved so as to increase traffic capacity or that has been reconstructed. This term does not include road maintenance, repair, chip seal, pavement or roadbed rehabilitation that does not affect roadway geometrics, or surface overlay work.		X

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
Paved Road: any road that is covered by concrete, asphaltic concrete, asphalt, or other materials which provides structural support for vehicles.	X	
Paved Road/Area: any road/area that is covered by concrete, asphaltic concrete, asphalt, or other materials which provides structural support for vehicles.		X
Rural: areas not classified as urban constitute "rural."		Added
Stabilized Unpaved Road: any unpaved road, or unpaved vehicle/equipment traffic area surface which meets the definition of stabilized surface as determined by the test methods in Appendix B, Section 3 of this rule, and where VDE is limited to 20% opacity.	X	
Stabilized Unpaved Road/Unpaved shoulder: any unpaved road, unpaved shoulder, or unpaved vehicle/equipment traffic area surface which meets the definition of stabilized surface as determined by the test methods in Appendix B, Section 3 of this rule, and where VDE is limited to 20% opacity.		X
Temporary Unpaved Road: any unpaved road surface which is created to support a temporary or periodic activity, and the use of such road surface is limited to vehicle access for a period of not more than six months during any consecutive three-year period. Temporary unpaved roads must also comply with the definition of section 3.59.		Added
Unpaved Access/Haul Road: any road or path that is not covered by one of the materials described in the paved road definition that is associated with any construction, demolition, excavation, extraction, and other earthmoving activity and used by vehicles, equipment, haul trucks, or any conveyances to travel within a site, to move materials from one part of a site to another part within the same site, or to provide temporary access to a site.		Added
Vehicle Trips Per Day: The 24-hour total (midnight to midnight) count of all vehicles traveling over a survey point on a road segment or unpaved vehicle/equipment traffic area. The survey point must represent the most heavily traveled portion of the road segment or unpaved vehicle/equipment traffic area. Trips made by "implements of husbandry" as defined in California Vehicle Code Division 16, Sections 36000 through 36017 shall not be included in the "vehicle trips per day" count.	X	
Vehicle Daily Trips (VDT): The 24-hour total (midnight to midnight) count of all vehicles traveling over a survey point on a road segment or unpaved vehicle/equipment traffic area. The survey point must represent the most heavily traveled portion of the road segment or unpaved vehicle/equipment traffic area.		X
Wind Barrier: a fence or structure constructed, or row of trees planted, to reduce the amount of entrained fugitive dust.	X	

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
Wind Barrier: a fence or structure constructed, or row of trees planted, to reduce the shearing effects caused by wind thereby reducing or eliminating the amount of entrained fugitive dust.		X
Wind Generated Fugitive Dust: visible emissions from any disturbed surface area which are generated by wind action alone.		Added
Workday: a day on which work is performed as distinguished from a day off. For the purposes of this Regulation, a workday may be any period of hours or shift within a 24-hour period.		Added
7.0 Fugitive PM10 Management Plan for Unpaved Roads and Unpaved Vehicle/Equipment Traffic Areas		
As a compliance alternative for Rule 8061 section 5.2 and Rule 8071 section 5.1, an operator may implement a Fugitive PM10 Management Plan (FPMP) that is designed to achieve 50% control efficiency and has been approved by the APCO. The FPMP shall be implemented on all days that traffic exceeds, or is expected to exceed, 75 vehicle trips per day. The owner/operator remains subject to all requirements of the applicable rules of Regulation VIII that are not addressed by the FPMP. It should be noted that the FPMP is not a compliance option for any requirement for a stabilized surface as defined in Rule 8011. The requirements for FPMPs for agricultural sources are specified in Rule 8081 (Agricultural Sources) section 7.0.	X	
As a compliance alternative for Rule 8061 section 5.2 and Rule 8071 section 5.1, an operator may implement a Fugitive PM10 Management Plan (FPMP) that is designed to achieve 50% control efficiency and has been approved by the APCO. The FPMP shall be implemented on all days that traffic exceeds, or is expected to exceed, the number of annual average daily vehicle trips or vehicle trips per day as specified in Rules 8061, 8071, and 8081. The owner/operator remains subject to all requirements of the applicable rules of Regulation VIII that are not addressed by the FPMP. It should be noted that the FPMP is not a compliance option for any requirement for a stabilized surface as defined in Rule 8011. The requirements for FPMPs for agricultural sources are specified in Rule 8081 (Agricultural Sources) section 7.0.		X
The months (and weeks, if known) of the year that vehicle traffic is expected to exceed 75 vehicle trips per day, and the types of vehicles (e.g., passenger vehicles, trucks, mobile equipment) expected on each road or traffic area. As stated above, the FPMP shall be implemented on all days that traffic exceeds, or is expected to exceed, 75 vehicle trips per day.	X	
The months (and weeks, if known) of the year that vehicle traffic is expected to reach or exceed the number of vehicle trips as specified in Rules 8061, 8071, and 8081, and the types of vehicles (e.g., passenger vehicles, trucks, mobile equipment) expected on each road or traffic area. As stated above, the FPMP shall be implemented on all days that traffic exceeds, or is expected to exceed, the number of vehicle trips as specified		X

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
in Rules 8061, 8071, and 8081.		

Comparative Analysis of the Current SIP Version (amended August 19, 2004) of District Rule 8021 with the Previous SIP Version (adopted November 15, 2001)

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
2.0 APPLICABILITY		
This rule applies to any construction, demolition, excavation, extraction, and other earthmoving activities, including, but not limited to, land clearing, grubbing, scraping, travel on site, and travel on access roads to and from the site. This rule also applies to the construction of new landfill disposal sites or modification to existing landfill disposal sites prior to commencement of landfilling activities. The provisions of this rule shall be effective on and after May 15, 2002.	X	
This rule applies to any construction, demolition, excavation, extraction, and other earthmoving activities, including, but not limited to, land clearing, grubbing, scraping, travel on site, and travel on access roads to and from the site. This rule also applies to the construction of new landfill disposal sites or modification to existing landfill disposal sites prior to commencement of landfilling activities. The provisions of this rule adopted on November 15, 2001 shall remain in effect until October 1, 2004 at which time the amendments adopted on August 19, 2004 shall take effect.		X
4.0 Exemptions		
Mowing, disking, or cutting of weeds and dried vegetation related to fire prevention required by a Federal, State or local agency on a site less than one-half (½) acre. Activities performed in conjunction with mowing and cutting are not exempt from complying with the provisions of other applicable rules under Regulation VIII.	X	
Disking of weeds and dried vegetation related to fire prevention required by a Federal, State or local agency on a site less than one-half (½) acre. Activities performed in conjunction with disking are not exempt from complying with the provisions of other applicable rules under Regulation VIII.		X
The spreading of landfill daily cover necessary to cover.	X	
The spreading of landfill daily cover necessary to cover garbage/rubbish in order to preserve public health and safety and to comply with the requirements of the California Integrated Waste Management Board during wind conditions which would generate fugitive dust.		X
5.0 Requirements		

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
No person shall perform any construction, demolition, excavation, extraction, or other earthmoving activities unless the appropriate requirements in sections 5.1 and 5.2 are sufficiently implemented to limit VDE to 20% opacity. In addition to the requirements of this rule, a person shall comply with all other applicable requirements of Regulation VIII.	X	
No person shall perform any construction, demolition, excavation, extraction, or other earthmoving activities unless the appropriate requirements in sections 5.1 through 5.5 are sufficiently implemented to limit VDE to 20% opacity and comply with the conditions for a stabilized surface area when applicable. In addition to the requirements of this rule, a person shall comply with all other applicable requirements of Regulation VIII.		X
A person shall implement the requirements specified in Table 8021-1 when using wrecking balls or other wrecking equipment to raze or demolish buildings.	X	
A person shall implement the requirements specified below when using wrecking balls or other wrecking equipment to raze or demolish buildings.		X
Apply sufficient water to building exterior surfaces, unpaved surface areas where equipment will operate, and razed building materials to limit VDE to 20% opacity throughout the duration of razing and demolition activities.		Added
Apply sufficient dust suppressants to unpaved surface areas within 100 feet where materials from razing or demolition activities will fall in order to limit VDE to 20% opacity.		Added
Apply sufficient dust suppressants to unpaved surface areas where wrecking or hauling equipment will be operated in order to limit VDE to 20% opacity.		Added
Handling, storage, and transport of bulk materials on-site or off-site resulting from the demolition or razing of buildings shall comply with the requirements specified in Rule 8031 (Bulk Materials).		Added
Apply water within 1 hour of demolition to unpaved surfaces within 100 feet of the demolished structure.		Added
Prevention and removal of carryout or trackout on paved public access roads from demolition operations shall be performed in accordance with Rule 8041 (Carryout and Trackout).		Added

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
<p style="text-align: center;">Table 8021-1 CONTROL MEASURES FOR DEMOLITION ACTIVITIES</p> <p>A. DURING ACTIVE DEMOLITION OPERATIONS:</p> <p>A1 Apply sufficient water to building exterior surfaces and razed building materials to limit VDE to 20% opacity throughout the duration of razing and demolition activities; and</p> <p>A2 Apply sufficient dust suppressants to unpaved surface areas where materials from razing or demolition activities will fall, or where wrecking or hauling equipment will be operated, in order to limit VDE to 20% opacity; and</p> <p>A3 Handling, storage, and transport of bulk materials on-site or off-site resulting from the demolition or razing of buildings shall comply with the requirements specified in Rule 8031 (Bulk Materials); and</p> <p>A4 Prevention and removal of carryout or trackout on paved public access roads from demolition operations shall be performed in accordance with Rule 8041 (Carryout and Trackout).</p>	Deleted	
<p>Table 8021-2 – CONTROL MEASURE OPTIONS FOR CONSTRUCTION, EXCAVATION, EXTRACTION, AND OTHER EARTHMOVING ACTIVITIES</p>	X	
<p>Table 8021-1 – CONTROL MEASURE OPTIONS FOR CONSTRUCTION, EXCAVATION, EXTRACTION, AND OTHER EARTHMOVING ACTIVITIES</p>		X
<p>5.3 Speed Limitations and Posting of Speed Limit Signs on Uncontrolled Unpaved Access/Haul Roads on Construction Sites</p> <p>5.3.1 An owner/operator shall limit the speed of vehicles traveling on uncontrolled unpaved access/haul roads within construction sites to a maximum of 15 miles per hour.</p> <p>5.3.1 An owner/operator shall post speed limit signs that meet State and Federal Department of Transportation standards at each construction site's uncontrolled unpaved access/haul road entrance. At a minimum, speed limit signs shall also be posted at least every 500 feet and shall be readable in both directions of travel along uncontrolled unpaved access/haul roads.</p>		Added
<p>5.4 Wind Generated Fugitive Dust Requirements</p> <p>5.4.1 Cease outdoor construction, excavation, extraction, and other earthmoving activities that disturb the soil whenever VDE exceeds 20% opacity. Indoor activities such as electrical, plumbing, dry wall installation, painting, and any other activity that does not cause any disturbances to the soil are not subject to this requirement.</p> <p>5.4.1 Continue operation of water trucks/devices when outdoor construction excavation, extraction, and other earthmoving activities cease, unless unsafe to do so.</p>		Added

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
6.3.1 An owner/operator shall submit a Dust Control Plan to the APCO at least 30 days prior to the start of any construction activity on any site that will include 40 acres or more of disturbed surface area, or will include moving, more than 2,500 cubic yards per day of bulk materials on at least three days. An owner/operator shall provide written notification to the APCO within 10 days prior to the commencement of earthmoving activities via fax or mail. The requirement to submit a dust control plan shall apply to all such activities conducted for commercial, industrial, or institutional purposes or conducted by any governmental entity.	X	
6.3.1 An owner/operator shall submit a Dust Control Plan to the APCO prior to the start of any construction activity on any site that will include 10 acres or more of disturbed surface area for residential developments, or 5 acres or more of disturbed surface area for non-residential development, or will include moving, depositing, or relocating more than 2,500 cubic yards per day of bulk materials on at least three days. Construction activities shall not commence until the APCO has approved or conditionally approved the Dust Control Plan. An owner/operator shall provide written notification to the APCO within 10 days prior to the commencement of earthmoving activities via fax or mail. The requirement to submit a dust control plan shall apply to all such activities conducted for residential and non-residential (e.g., commercial, industrial, or institutional) purposes or conducted by any governmental entity.		X
6.3.4 A Dust Control Plan shall contain all the information described in Section 6.3.6 of this rule. The APCO shall approve, disapprove, or conditionally approve the Dust Control Plan.	X	
6.3.4 A Dust Control Plan shall contain all the information described in Section 6.3.6 of this rule. The APCO shall approve, disapprove, or conditionally approve the Dust Control Plan within 30 days of plan submittal. A Dust Control Plan is deemed automatically approved if, after 30 days following receipt by the District, the District does not provide any comments to the owner/operator regarding the Dust Control Plan.		X
6.3.6.1 Name(s), address(es), and phone number(s) of person(s) and owner(s)/operator(s) responsible for the preparation, submittal, and implementation of the Dust Control Plan and responsible for the dust generating operation and dust generating application.	X	
6.3.6.1 Name(s), address(es), and phone number(s) of person(s) and owner(s)/operator(s) responsible for the preparation, submittal, and implementation of the Dust Control Plan and responsible for the dust generating operation and the application of dust control measures.		X
6.3.6.8 At least one key individual representing the owner/operator or any person who prepares a Dust Control Plan must complete a Dust Control Training Class conducted by the District. The District will conduct Dust Control Training Classes on an as needed basis.		Added
6.4 District Notification of Earthmoving Activities on Smaller Construction Sites		Added

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
<p>6.4.1 On residential development construction sites ranging from 1.0 to less than 10.0 acres in area, an owner/operator shall provide written notification to the District at least 48 hours prior to his/her intent to commence any earthmoving activities.</p> <p>6.4.2 On non-residential development construction sites ranging from 1.0 to less than 5.0 acres in area, an owner/operator shall provide written notification to the District at least 48 hours prior to his/her intent to commence any earthmoving activities.</p>		

Comparative Analysis of the Current SIP Version (amended August 19, 2004) of District Rule 8031 with the Previous SIP Version (adopted November 15, 2001)

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
2.0 APPLICABILITY		
This rule applies to the outdoor handling, storage, and transport of any bulk material. The provisions of this rule shall be effective on and after May 15, 2002.	X	
This rule applies to the outdoor handling, storage, and transport of any bulk material. The provisions of this rule adopted on November 15, 2001 shall remain in effect until October 1, 2004 at which time the amendments adopted on August 19, 2004 shall take effect.		X
4.0 Exemptions		
4.4 Outdoor storage and handling of any bulk material at a single site where the total material stored is less than 100 cubic yards.	X	
4.4 Outdoor storage of any bulk material at a single site where no material is actively being added or removed at the end of the workday or overnight and where the total material stored is less than 100 cubic yards.		X
5.0 Requirements		
A2 Construct and maintain wind barriers sufficient to limit VDE to 20% opacity and with less than 50% porosity. If utilizing fences or wind barriers, control measure A1 shall also be implemented		Added
A4 Construct and maintain wind barriers sufficient to limit VDE to 20% opacity. If utilizing fences or wind barriers, control measure A1 shall also be implemented.	X	
B3 Construct and maintain wind barriers sufficient to limit VDE to 20% opacity and with less than 50% porosity. If utilizing fences or wind barriers, apply water or chemical/organic stabilizers/suppressants to limit VDE to 20% opacity or;		X
B4 Utilize a 3-sided structure with a height at least equal to the height of the storage pile and with less than 50% porosity.		Added

Comparative Analysis of the Current SIP Version (amended August 19, 2004) of District Rule 8041 with the Previous SIP Version (adopted November 15, 2001)

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
2.0 APPLICABILITY		
This rule applies to all sites that are subject to Rules 8021 (Construction, Demolition, Excavation, Extraction, and other Earthmoving Activities), 8031 (Bulk Materials), and 8071 (Unpaved Vehicle and Equipment Traffic Areas) where carryout or trackout has occurred or may occur. The provisions of this rule shall be effective on and after May 15, 2002.	X	
This rule applies to all sites that are subject to any of the following rules where carryout or trackout has occurred or may occur on paved public roads or the paved shoulders of a paved public road: Rules 8021 (Construction, Demolition, Excavation, Extraction, and other Earthmoving Activities), 8031 (Bulk Materials), 8061 (Paved and Unpaved Roads), and 8071 (Unpaved Vehicle and Equipment Traffic Areas) The provisions of this rule adopted on November 15, 2001 shall remain in effect until October 1, 2004 at which time the amendments adopted on August 19, 2004 shall take effect.		X
5.0 Requirements		
5.1 Owners/operators of sites not identified in Sections 5.2 through 5.5 shall remove all visible carryout and trackout at the end of each workday.	X	
5.1 Owners/operators shall remove all visible carryout and trackout at the end of each workday.		X
5.2 Within urban area, if carryout and trackout extends less than 50 feet from the nearest exit point of a site, the owner/operator shall remove all visible carryout and trackout at the end of each workday.	Deleted	
5.3 An owner/operator of any site with 150 or more vehicle trips per day shall prevent carryout and trackout as specified in Section 5.8.	X	
5.2 An owner/operator of any site with 150 or more vehicle trips per day, or 20 or more vehicle trips per day by vehicles with three or more axles shall take the actions for carryout and trackout as specified in Section 5.8.		X
5.4 An owner/operator subject to the requirements of a Dust Control Plan as specified in Rule 8021 (Construction, Demolition, Excavation, Extraction, and other Earthmoving Activities) shall prevent carryout and trackout as specified in Section 5.8.	X	

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
5.3 An owner/operator subject to the requirements of a Dust Control Plan as specified in Rule 8021 (Construction, Demolition, Excavation, Extraction, and other Earthmoving Activities) shall take the actions for carryout and trackout as specified in Section 5.8.		X
5.5 Within urban areas or, an owner/operator shall prevent or immediately remove carryout and trackout when it extends more than 50 feet from the nearest exit point of a site.	X	
5.4 Within urban areas or, an owner/operator shall prevent carryout and trackout, or immediately remove carryout and trackout when it extends 50 feet or more from the nearest unpaved surface exit point of a site.		X
5.5 Within rural areas, construction projects 10 acres or more in size, an owner/operator shall prevent carryout and trackout, or immediately remove carryout and trackout when it extends 50 feet or more from the nearest unpaved surface exit point of a site.		Added
5.7.3 Operating a PM10-efficient street sweeper that has a pick-up efficiency of at least 80 percent as determined by using the Street Sweeper Compliance Testing Method described in South Coast Air Quality Management District Rule 1186 (PM10 Emissions from Paved and Unpaved Roads, and Livestock Operations).	X	
5.7.3 Operating a PM10-efficient street sweeper that has a pick-up efficiency of at least 80 percent as defined in Rule 8011 (General Requirements).		X
5.7.4 Flushing with water, if curbs or gutters are not present and where the use of water will not result as a source of trackout material or result in adverse impacts on storm water drainage systems or violate any National Pollutant Discharge Elimination System permit program.		Added
5.8 Prevention of carryout and trackout shall be 5.8.1 Installing and maintaining a trackout control device at all access points to paved public roads; or 5.8.1.3 Maintaining sufficient length of paved interior roads to allow mud and dirt to drop off of vehicles before exiting the site; or 5.8.1.4 Removing deposits of mud and dirt accumulated on paved interior roads with sufficient frequency to prevent carryout and trackout onto paved public roads.	X	

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
<p>5.8 Carryout and trackout shall be prevented and mitigated as specified in sections 5.8.1 and 5.8.2:</p> <p>5.8.1 Prevented by:</p> <p>5.8.1.1 Installing and maintaining a trackout control device meeting the specifications contained in Section 5.9 at all access points to paved public roads; or</p> <p>5.8.1.2 Utilizing a carryout and trackout prevention procedure which has been demonstrated to the satisfaction of the APCO and US EPA as achieving an equivalent or greater level of control than specified in Section 5.8.1.1.</p> <p>5.8.2 Mitigated by:</p> <p>In the event that measures specified in Section 5.8.1 are insufficient to prevent carryout and trackout, removal of any carryout and trackout must be accomplished within one-half hour of the generation of such carryout and trackout.</p>		X
<p>5.9 Specifications for Section 5.8.1 shall meet the following conditions or combination of conditions:</p> <p>5.9.1 For use of grizzlies or other similar devices designed to removed dirt/mud from tires, the devices shall extend from the intersection with the public paved road surface for a distance of at least 25 feet, and cover the full width of the unpaved exit surface for at least 25 feet.</p> <p>5.9.2 For use of gravel pads, coverage with gravel shall be at least one inch or larger in diameter and at least 3 inches deep, shall extend from the intersection with the public paved road surface for a distance of at least 50 feet, and cover the full width of the unpaved exit surface for at least 50 feet. Any gravel deposited onto a public paved road travel lane or shoulder must be removed at the end of the workday or immediately following the last vehicle using the gravel pad, or at least once every 24 hours, whichever occurs first.</p> <p>5.9.3 For use of paving, paved surfaces shall extend from the intersection with the public paved road surface for a distance of at least 100 feet, and cover the full width of the unpaved access road for that distance to allow mud and dirt to drop off of vehicles before exiting the site. Mud and dirt deposits accumulating on paved interior roads shall be removed with sufficient frequency, but not less frequently than once per workday, to prevent carryout and trackout onto paved public roads</p>		Added

Comparative Analysis of the Current SIP Version (amended August 19, 2004) of District Rule 8051 with the Previous SIP Version (adopted November 15, 2001)

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
2.0 APPLICABILITY		
This rule applies to any open area having 3.0 acres or more of disturbed surface area, that has remained undeveloped, unoccupied, unused, or vacant for more than seven days. The provisions of this rule shall be effective on and after May 15, 2002.	X	
This rule applies to any open area having 0.5 acres or more within urban areas, or 3.0 acres or more within rural areas; and contains at least 1000 square feet of disturbed surface area. The provisions of this rule adopted on November 15, 2001 shall remain in effect until October 1, 2004 at which time the amendments adopted on August 19, 2004 shall take effect.		X
4.0 Exemptions		
4.1. Any weed abatement activity utilizing mowing and/or cutting, and which leaves at least three inches of stubble immediately after such mowing/cutting has occurred.		X
5.0 Requirements		
<p>A. OPEN AREAS:</p> <p>Implement, apply, maintain, and reapply if necessary, at least one or a combination of the following control measures to comply at all times with the conditions for a stabilized surface and limit VDE to 20% opacity as defined in Rule 8011:</p> <p>A1 Apply and maintain water or dust suppressant(s) to all unvegetated areas sufficient to limit VDE to 20% opacity; or</p> <p>A2 Establish vegetation on all previously disturbed areas sufficient to limit VDE to 20% opacity; or</p> <p>A3 Pave, apply and maintain gravel, or apply and maintain chemical/organic stabilizers/suppressants sufficient to limit VDE to 20% opacity.</p>	X	
<p>A. OPEN AREAS:</p> <p>Implement, apply, maintain, and reapply if necessary, at least one or a combination of the following control measures to comply at all times with the conditions for a stabilized surface and limit VDE to 20% opacity as defined in Rule 8011:</p> <p>A1 Apply and maintain water or dust suppressant(s) to all unvegetated areas; or</p> <p>A2 Establish vegetation on all previously disturbed areas; or</p> <p>A3 Pave, apply and maintain gravel, or apply and maintain chemical/organic stabilizers/suppressants.</p>		X

Comparative Analysis of the Current SIP Version (amended August 19, 2004) of District Rule 8061 with the Previous SIP Version (adopted November 15, 2001)

Comparison of Requirements	Adopted 11/15/01	Amended 8/19/04
2.0 APPLICABILITY		
This rule applies to any new or existing public or private paved or unpaved road, road construction project, or road modification project. The provisions of this rule shall be effective on and after May 15, 2002.	X	
This rule applies to any new or existing public or private paved or unpaved road, road construction project, or road modification project. The provisions of this rule adopted on November 15, 2001 shall remain in effect until October 1, 2004 at which time the amendments adopted on August 19, 2004 shall take effect.		X
4.0 Exemptions		
<p>In addition to the exemptions established in Rule 8011, the following exemptions are established for this Rule:</p> <p>4.1 Any unpaved road segment with less than 26 75 vehicle trips for that day. If 75 vehicle trips for that day will be exceeded, an owner/operator shall comply with the applicable requirements of this Rule.</p> <p>4.2 Maintenance and resurfacing of existing paved roads.</p> <p>4.3 Agricultural sources subject to, or specifically exempt from, Rule 8081 (Agricultural Sources)</p>	X	
<p>In addition to the exemptions established in Rule 8011, the following exemptions are established for this Rule:</p> <p>4.1 Any unpaved road segment with less than 26 annual average daily vehicle trips (AADT).</p> <p>4.1.1 This exemption shall not apply to Section 5.2.3 of this rule.</p> <p>4.1.2 An owner/operator of any unpaved road segment with 26 or more AADT must provide estimated or actual vehicle trip data to the APCO by July 1, 2005.</p> <p>4.2 Maintenance and resurfacing of existing paved roads does not apply to section 5.2 of this rule.</p> <p>4.3 Agricultural sources subject to, or specifically exempt from, Rule 8081 (Agricultural Sources)</p> <p>4.4 Emergency activities performed to ensure public health and safety as specified in Rule 8011, section 4.1.</p> <p>4.5 Equipment used to remove debris beyond the capabilities of PM10-efficient street sweepers.</p>		X
5.0 Requirements		