



JUL 28 2010

Max Sims  
Big West of CA, LLC  
6451 Rosedale Hwy  
Bakersfield, CA 93308

**Re: Notice of Minor Title V Permit Modification  
District Facility # S-33  
Project # S-1072819**

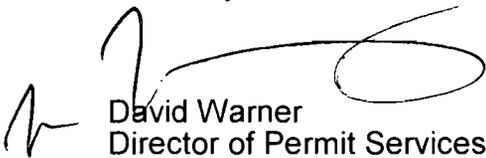
Dear Mr. Sims:

Enclosed is the District's analysis of your application for minor Title V permit modification for the facility identified above. You proposed a Title V minor permit modification to incorporate recently issued Authorities to Construct S-33-49-5, '53-12, '59-13, '61-13 into the Title V operating permit. The applicant proposes to modify various units for Rule 4306 compliance.

Enclosed is the engineering evaluation with the following attachments: proposed modified Title V permit, recently issued Authorities to Construct S-33-49-5, '53-12, '59-13, '61-13, emission increases, application, and previous Title V permit. This project will be subject to a 45-day EPA commenting period prior to the District taking final action.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Jim Swaney at (559) 230-5900.

Sincerely,

  
David Warner  
Director of Permit Services

Enclosures

**Seyed Sadredin**  
Executive Director/Air Pollution Control Officer

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: 661-392-5500 FAX: 661-392-5585



JUL 28 2010

Gerardo C. Rios, Chief  
Permits Office  
Air Division  
U.S. EPA - Region IX  
75 Hawthorne St  
San Francisco, CA 94105

Re: **Notice of Minor Title V Permit Modification**  
**District Facility # S-33**  
**Project # S-1072819**

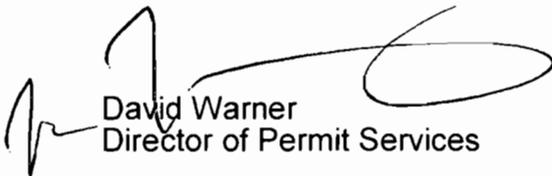
Dear Mr. Rios:

Enclosed for you to review is an application for minor Title V permit modification for the facility identified above. Big West of CA, LLC is proposing a Title V minor permit modification to incorporate the recently issued Authorities to Construct S-33-49-5, '53-12, '59-13, '61-13 into the Title V operating permit. The applicant proposes to modify various units for Rule 4306 compliance.

Enclosed is the engineering evaluation with the following attachments: proposed modified Title V permit, recently issued Authorities to Construct S-33-49-5, '53-12, '59-13, '61-13, emission increases, application, and previous Title V permit. Please submit your written comments on this project within the 45-day comment period that begins on the date you receive this letter.

Thank you for your cooperation in this matter. If you have any questions, please contact Mr. Jim Swaney at (559) 230-5900.

Sincerely,

  
David Warner  
Director of Permit Services

Enclosures

**Seyed Sadredin**  
Executive Director/Air Pollution Control Officer

---

**Northern Region**  
4800 Enterprise Way  
Modesto, CA 95356-8718  
Tel: (209) 557-6400 FAX: (209) 557-6475

**Central Region (Main Office)**  
1990 E. Gettysburg Avenue  
Fresno, CA 93726-0244  
Tel: (559) 230-6000 FAX: (559) 230-6061

**Southern Region**  
34946 Flyover Court  
Bakersfield, CA 93308-9725  
Tel: 661-392-5500 FAX: 661-392-5585

# TITLE V APPLICATION REVIEW

Minor Modification  
Project #: S-1072819

Engineer: Stanley Tom  
Date: July 7, 2010

Facility Number: S-33  
Facility Name: Big West of CA, LLC  
Mailing Address: 6451 Rosedale Hwy  
Bakersfield, CA 93308

Contact Name: Max Sims  
Phone: (661) 326-4418

Responsible Official: Ed Juno  
Title: Vice President - West Coast Refining

---

## I. PROPOSAL

Big West of CA, LLC is proposing a Title V minor permit modification to incorporate the recently issued Authorities to Construct S-33-49-5, '52-12, '59-13, '61-13 into the Title V operating permit. The applicant proposes to modify various units for Rules 4306 and 4455 compliance.

The purpose of this evaluation is to identify all applicable requirements, determine if the facility will comply with the applicable requirements and to provide the legal and factual basis for the proposed revisions.

## II. FACILITY LOCATION

6451 Rosedale Hwy (Area 1 & 2)  
Bakersfield, CA 93308

## III. EQUIPMENT DESCRIPTION

**S-33-49-7:** 161.4 MM BTU/HR CRUDE UNIT #11 INCLUDING HEATERS 11-H11, 11-H12, AND 11-H13, AND TOPPING ASSEMBLY - AREA 2

**S-33-52-14:** 86.8 MM BTU/HR CATALYTIC REFORMING UNIT #26 INCLUDING 6 HEATERS, HYDROSULFURIZATION ASSEMBLY; CATALYTIC

ASSEMBLY, DEPENTANIZER SERVICE TOWER (26-V13), REBOILER STEAM CONDENSATE BALANCE DRUM (26-D31), 2 FEED/BOTTOMS EXCHANGERS (26-E45 A/B), 2 OVERHEAD CONDENSERS (26-E46 A/B), DISTILLATE COOLER (26-E47), 2 BOTTOMS PUMPS (26-P37 A/B), AND 2 REFLUX PUMPS (26 P38 A/B)

**S-33-59-15:** 42 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H6 - AREA 2

**S-33-61-15:** 78.8 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H8 - AREA 2

#### **IV. SCOPE OF EPA AND PUBLIC REVIEW**

This change to a Title V permit is considered to be a minor modification and, as such, requires no public review.

#### **V. APPLICABLE REQUIREMENTS**

District Rule 2520, Federally Mandated Operating Permits (Adopted June 21, 2001)

#### **VI. DESCRIPTION OF PROPOSED MODIFICATIONS**

S-33-49-7:

Permit conditions 23-46 on the current Permit to Operate were replaced by permit conditions 23-58 on the proposed Permit to Operate for Rule 4455 compliance.

S-33-52-14:

Permit conditions 4, 7, 48-71 on the current Permit to Operate were replaced by permit conditions 50-85 on the proposed Permit to Operate updated for Rule 4455 compliance.

Permit condition 10 from the current Permit to Operate was split into permit conditions 11 and 12 on the proposed Permit to Operate. This condition lists the emission factors for the heaters.

Permit conditions 12-13 from the current Permit to Operate were replaced by permit conditions 13-16 on the proposed Permit to Operate updated for Rule 4306 compliance.

Permit conditions 18 and 19 on the proposed Permit to Operate were added for Rule 4306 compliance.

Permit condition 17 from the proposed Permit to Operate was added for Rule 4306 compliance.

Permit condition 19 from the proposed Permit to Operate was added to specify source testing requirements.

Permit conditions 18-20 from the current Permit to Operate were replaced by permit condition 20 on the proposed Permit to Operate updated for Rule 4306 compliance.

Permit conditions 21 and 26 from the proposed Permit to Operate were added for Rule 4320 compliance.

S-33-59-15:

Permit conditions 4-7 on the current Permit to Operate were replaced by permit conditions 4-10 on proposed Permit to Operate for Rule 4306 compliance.

Permit conditions 24-47 from the current Permit to Operate were replaced by permit conditions 27-62 on the proposed Permit to Operate updated for Rule 4455 compliance.

Permit conditions 66 and 67 from the proposed Permit to Operate were added for Rule 4320 compliance.

S-33-61-15:

Permit conditions 4-7 on the current Permit to Operate were replaced by permit conditions 4-10 on proposed Permit to Operate for Rule 4306 compliance.

Permit conditions 24-47 from the current Permit to Operate were replaced by permit conditions 27-62 on the proposed Permit to Operate updated for Rule 4455 compliance.

Permit conditions 66 and 67 from the proposed Permit to Operate were added for Rule 4320 compliance.

## VII. COMPLIANCE

In accordance with Rule 2520, 3.20, these modifications:

1. Do not violate requirements of any applicable federally enforceable local or federal requirement;
2. Do not relax monitoring, reporting, or recordkeeping requirements in the permit and are not significant changes in existing monitoring permit terms or conditions;
3. Do not require or change a case-by-case determination of an emission limitation or other standard, or a source-specific determination for temporary sources of ambient impacts, or a visibility or increment analysis;
4. Do not seek to establish or change a permit term or condition for which there is no corresponding underlying applicable requirement and that the source has assumed to avoid an applicable requirement to which the source would otherwise be subject. Such terms and conditions include:
  - a. A federally enforceable emission cap assumed to avoid classification as a modification under any provisions of Title I of the Federal Clean Air Act; and
  - b. An alternative emissions limit approved pursuant to regulations promulgated under section 112(i)(5) of the Federal Clean Air Act; and
5. Are not Title I modifications as defined in District Rule 2520 or modifications as defined in section 111 or 112 of the Federal Clean Air Act; and
6. Do not seek to consolidate overlapping applicable requirements.

In accordance with Rule 2520, the application meets the procedural requirements of section 11.4 by including;

1. A description of the change, the emissions resulting from the change, and any new applicable requirements that will apply if the change occurs;
2. The source's suggested draft permit; and
3. Certification by a responsible official that the proposed modification meets the criteria for use of minor permit modification procedures and a request that such procedures be used.

## VIII. ATTACHMENTS

- A. Proposed Modified Title V Operating Permit No. S-33-49-7, '52-14, '59-15, '61-15
- B. Authorities to Construct No. S-33-49-5, '52-12, '59-13, '61-13
- C. Emissions Increases
- D. Application
- E. Previous Title V Operating Permit No.'s S-33-49-1, '52-11, '59-7, '61-7

# ATTACHMENT A

Proposed Modified Title V Operating Permit No.  
(S-33-49-7, '52-14, '59-15, '61-15)

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-33-49-7

EXPIRATION DATE: 08/31/2007

SECTION: 28 TOWNSHIP: 29S RANGE: 27E

## EQUIPMENT DESCRIPTION:

161.4 MM BTU/HR CRUDE UNIT #11 INCLUDING HEATERS 11-H11, 11-H12, AND 11-H13, AND TOPPING ASSEMBLY - AREA 2

## PERMIT UNIT REQUIREMENTS

1. Heaters 11-H11 and 11-H12 shall not be operated for any reason until necessary retrofits are made to comply with the applicable requirements of District Rules 4305, 4306 and 4351. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
2. No modifications to heaters 11-H11 and 11-H12 shall be performed without an Authority to Construct for that modification(s), except for changes specified in the condition below. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
3. The fuel supply line(s) shall be physically disconnected from heaters 11-H11 and 11-H12. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
4. Heaters 11-H11 and 11-H12 shall not be operated unless the owner or operator applies to modify the Title V permit to address the requirements of District Rule 2520, 9.0 for this permit unit. [District Rule 2520, 9.0] Federally Enforceable Through Title V Permit
5. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
6. Gas plant Heater 11-H13 is in service as part of hydro unit #27 S-33-349 as heater 27H-1. [District NSR Rule] Federally Enforceable Through Title V Permit
7. {588} Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
8. Spent caustics and waste liquids shall be disposed of in a manner preventing the creation of odors. [District Rule 4102] Federally Enforceable Through Title V Permit
9. Heat exchangers utilizing cooling water shall be maintained to prevent volatile organic compound emissions from cooling towers. [District NSR Rule] Federally Enforceable Through Title V Permit
10. Heaters 11-H11 and 11-H12 emission rates shall not exceed NO<sub>x</sub> (as NO<sub>2</sub>): 0.036 lb/MMBtu or 30 ppmv @ 3% O<sub>2</sub>, or CO: 400 ppmv @ 3% O<sub>2</sub>. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
11. A source test to demonstrate compliance with the indicated emission limits shall be performed within 60 days of recommencing operation of heaters 11-H11 or 11-H12. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
12. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

13. All required source testing shall conform to the compliance testing procedures described in District Rule 1081 (Last Amended December 19, 1993). [District Rule 1081, and Kern County Rule 108.1] Federally Enforceable Through Title V Permit
14. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
15. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. Compliance with this requirement may be demonstrated by testing the sulfur content of each fuel and determining the maximum hourly emissions of sulfur compounds by multiplying the sulfur content of each fuel in lb/MMBtu by the maximum heat input rating of the unit; or by source testing in combination with fuel analysis. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
16. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit and sulfur emission limits has been demonstrated for 8 consecutive weeks for a fuel source, then the fuel testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
17. When complying with SO<sub>x</sub> emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6B; or Method 8; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by GC-FPD/TCD performed in the laboratory and EPA Method 19 to calculate emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
18. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
19. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
20. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). To demonstrate compliance with this requirement the operator shall test the sulfur content of each fuel source and demonstrate the sulfur content does not exceed 3.3% by weight for gaseous fuels; or determine that the concentration of sulfur compounds in the exhaust does not exceed the concentration limit by a combination of source testing and fuel analysis. [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
21. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
22. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

23. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
24. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
25. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit
26. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
27. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit
28. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
29. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
30. A component shall be considered leaking if one of more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit
31. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
32. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

33. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
34. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
35. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
36. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit
37. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit
38. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455, 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
39. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
40. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit
41. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

42. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
43. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
44. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
45. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit
46. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit
47. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit
48. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and, total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

49. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
50. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
51. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
52. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
53. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit
54. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
55. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
56. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit
57. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit
58. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

59. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
60. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
61. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
62. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
63. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
64. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
65. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
66. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
67. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
68. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-33-52-14

EXPIRATION DATE: 08/31/2007

SECTION: 28 TOWNSHIP: 29S RANGE: 27E

## EQUIPMENT DESCRIPTION:

86.8 MM BTU/HR CATALYTIC REFORMING UNIT #26 INCLUDING 6 HEATERS, HYDROSULFURIZATION ASSEMBLY; CATALYTIC ASSEMBLY, DEPENTANIZER SERVICE TOWER (26-V13), REBOILER STEAM CONDENSATE BALANCE DRUM (26-D31), 2 FEED/BOTTOMS EXCHANGERS (26-E45 A/B), 2 OVERHEAD CONDENSERS (26-E46 A/B), DISTILLATE COOLER (26-E47), 2 BOTTOMS PUMPS (26-P37 A/B), AND 2 REFLUX PUMPS (26 P38 A/B)

## PERMIT UNIT REQUIREMENTS

1. Heaters 26H12 and 26H17 shall not be operated for any reason until necessary retrofits are made to comply with the applicable requirements of District Rules 4305, 4306 and 4351. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
2. No modifications to heaters 26H12 and 26H17 shall be performed without an Authority to Construct for that modification(s), except for changes specified in the condition below. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
3. The fuel supply line(s) shall be physically disconnected from heaters 26H12 and 26H17. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
4. Fuel gas sulfur content (as H<sub>2</sub>S) shall not exceed 0.10 gr/dscf (160 ppmv) over a three-hour rolling average and shall be continuously monitored and recorded. [NSPS 40 CFR Part 60, Subpart J] Federally Enforceable Through Title V Permit
5. Permittee shall meet all applicable requirements of NSPS Subparts A, J, and GGG. [NSPS 40 CFR Part 60, Subparts A, J, and GGG] Federally Enforceable Through Title V Permit
6. Spent caustics and waste liquids shall be disposed of in a manner preventing the creation of odors. [District Rule 4102] Federally Enforceable Through Title V Permit
7. Leaks from valves and connectors associated with depentanizer (26-V13) fractionation trays, reboiler steam condensate balance drum (26-D31), 2 feed/bottoms exchangers (26-E45 A/B), 2 overhead condensers (26-E46 A/B), distillate cooler (26-E47), 2 bottoms pumps (26-P37 A/B), 2 reflux pumps (26 P38 A/B) and subject to the provisions of Rule 4455 shall be defined as a reading of methane on a portable hydrocarbon detection instrument in excess of 100 ppmv above background when measured one (1) cm from potential source. [District NSR Rule] Federally Enforceable Through Title V Permit
8. Leaks from seals on pumps 26-P37A/B and 26-P38A/B and subject to the provisions of Rule 4455 shall be defined as a reading of methane on a portable hydrocarbon detection instrument in excess of 500 ppmv above background when measured one (1) cm from potential source. [District NSR Rule] Federally Enforceable Through Title V Permit
9. Vessels shall be depressurized (during turnaround) as required by Rule 4454. [District Rule 4454] Federally Enforceable Through Title V Permit
10. Fugitive volatile organic compound (VOC) emissions, as determined by annual component count and District approved emission factors, shall not exceed 761.4 lb/day. [District NSR Rule] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

11. Heaters 26H12 and 26H17 emission rates shall not exceed NO<sub>x</sub> (as NO<sub>2</sub>): 0.18 lb/MMBtu or 147 ppmvd @ 3% O<sub>2</sub>, and CO: 400 ppmvd @ 3% O<sub>2</sub>. Emission limits are on a one hour average. [District Rules 2201, 4305, & 4351] Federally Enforceable Through Title V Permit
12. Emissions from heaters 26H11A/B, 26H13 and 26H15 shall not exceed any of the following limits: 0.0364 lb/MMBtu or 30 ppmvd NO<sub>x</sub> @ 3% O<sub>2</sub>, 0.024 lb-SO<sub>x</sub>/MMBtu, 0.0076 lb-PM<sub>10</sub>/MMBtu, 400 ppmvd CO @ 3% O<sub>2</sub> or 0.296 lb-CO/MMBtu, or 0.0055 lb-VOC/MMBtu. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
13. For heaters 26H11A/B, 26H13 and 26H15, the permittee shall monitor and record the stack concentration of NO<sub>x</sub>, CO, and O<sub>2</sub> at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
14. If either the NO<sub>x</sub> or CO concentrations corrected to 3% O<sub>2</sub>, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100, the permittee may fully comply with Rule 1100 in lieu of the performing the notification and testing required by this condition. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
15. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
16. The permittee shall maintain records of: (1) the date and time of NO<sub>x</sub>, CO, and O<sub>2</sub> measurements, (2) the O<sub>2</sub> concentration in percent and the measured NO<sub>x</sub> and CO concentrations corrected to 3% O<sub>2</sub>, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
17. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. No determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4306. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
18. Source testing for the indicated emission limits shall be performed within 60 days of recommencing operation of heaters 26H12 or 26H17. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
19. Source testing to measure NO<sub>x</sub> and CO emissions from heaters 26H11A/B, 26H13 and 26H15 while fired on natural gas shall be conducted within 60 days of initial start-up. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

20. Source testing to measure NO<sub>x</sub> and CO emissions from heaters 26H11A/B, 26H13 and 26H15 while fired on natural gas shall be conducted at least once every twelve (12) months. After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months. If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
21. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
22. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
23. NO<sub>x</sub> emissions for source test purposes shall be determined using EPA Method 7E or ARB Method 100 on a ppmv basis, or EPA Method 19 on a heat input basis. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
24. CO emissions for source test purposes shall be determined using EPA Method 10 or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
25. Stack gas oxygen (O<sub>2</sub>) shall be determined using EPA Method 3 or 3A or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
26. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
27. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
28. Compliance with fugitive VOC emission limit shall be demonstrated by annual component count and District approved emission factors. [District NSR Rule] Federally Enforceable Through Title V Permit
29. Permittee shall maintain records of hhv of fuel burned and cumulative annual fuel use for a period of five years and shall make such records readily available for District inspection upon request. [District NSR Rule] Federally Enforceable Through Title V Permit
30. Heaters 26H12 and 26H17 shall not be operated unless the owner or operator applies to modify the Title V permit to address the requirements of District Rule 2520, section 9.0 for this permit unit. [District Rule 2520, 9.0] Federally Enforceable Through Title V Permit
31. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
32. If permittee fails any compliance demonstration for NO<sub>x</sub> and CO emission limits when testing not less than once every 36 months, compliance with NO<sub>x</sub> and CO emission limits shall be demonstrated not less than once every 12 months. [District Rules 2520, 9.3.2, 4305 and 4351] Federally Enforceable Through Title V Permit
33. Annual test results submitted to the District from unit(s) representing a group of units may be used to measure NO<sub>x</sub> emissions of this permit for that group, provided the selection of the representative unit(s) is approved by the APCO prior to testing. Should any of the representative units exceed the required NO<sub>x</sub> emission limits of this permit, each of the units in the group shall demonstrate compliance by emissions testing within 90 days of the failed test. (This requirement shall not supersede a more stringent NSR or PSD permit testing requirement.) [District Rules 2520, 9.3.2, 4305, 6.3.2, and 4351, 6.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

34. The following conditions must be met for representative unit(s) to be used to test for NOx limits for a group of units: 1) all units are initially source tested and emissions from each unit in group are less than 90% of the permitted value and vary 25% or less from the average of all runs, 2) all units in group are similar in terms of rated heat input (rating not to exceed 100 MMBtu/hr), make and series, operation conditions, and control method, and 3) the group is owned by a single owner and located at a single stationary source. [District Rules 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
35. All units in a group for which representative units are source for NOx emissions shall have received the same maintenance and tune-up procedures as the representative unit(s). These tune-up procedures shall be completed according to District Rule 4304 (Adopted October 19, 1995) and tune-up test results shall show comparable results for each unit in the group. Records shall be maintained for each unit of the group including all preventative and corrective maintenance work done. [District Rule 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
36. All units in a group for which representative units are source tested for NOx emissions of this permit shall be fired on the same fuel type during the entire compliance period. If a unit switches for any time to an alternate fuel type (e.g. from natural gas to oil) then that unit shall not be considered part of the group and shall be required to undergo a source test for all fuel types used, within one year of the switch. [District Rules 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
37. The number of representative units source tested for NOx emissions shall be at least 30% of the total number of units in the group. The units included in the 30% shall be rotated, so that in 3 years, all units in the entire group will have been tested at least once. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
38. The portable analyzer shall be calibrated prior to each use with a two-point calibration method (zero and span). Calibration shall be performed with certified calibration gases. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
39. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NOx and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
40. All required source testing shall conform to the compliance testing procedures described in District Rule 1081(Last Amended December 19, 1993). [District Rule 1081, and Kern County Rule 108.1] Federally Enforceable Through Title V Permit
41. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
42. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO2. Compliance with this requirement may be demonstrated by testing the sulfur content of each fuel and determining the maximum hourly emissions of sulfur compounds by multiplying the sulfur content of each fuel in lb/MMBtu by the maximum heat input rating of the unit; or by source testing in combination with fuel analysis. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
43. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit and sulfur emission limits has been demonstrated for 8 consecutive weeks for a fuel source, then the fuel testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
44. When complying with SOx emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6B; or Method 8; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by GC-FPD/TCD performed in the laboratory and EPA Method 19 to calculated emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

45. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
46. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
47. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). To demonstrate compliance with this requirement the operator shall test the sulfur content of each fuel source and demonstrate the sulfur content does not exceed 3.3% by weight for gaseous fuels; or determine that the concentration of sulfur compounds in the exhaust does not exceed the concentration limit by a combination of source testing and fuel analysis. [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
48. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
49. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
50. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1 wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
51. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
52. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit
53. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
54. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

55. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
56. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
57. A component shall be considered leaking if one of more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit
58. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
59. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit
60. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
61. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
62. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
63. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit
64. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

65. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455, 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
66. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
67. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit
68. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit
69. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
70. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
71. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
72. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

73. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit
74. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit
75. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit
76. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
77. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
78. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
79. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
80. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

81. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
82. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
83. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit
84. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit
85. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit
86. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
87. The owner or operator may apply to the Administrator for a determination of equivalency for any means of emission limitation that achieves a reduction in emissions of VOC at least equivalent to the reduction in emissions of VOC achieved by the controls required in Subpart GGG. In doing so, the owner or operator shall comply with the requirements of 40 CFR 60.484. [40 CFR 60.592(c)] Federally Enforceable Through Title V Permit
88. Each pump in light liquid service (PLLS) shall be monitored monthly to detect leaks by the methods specified in 40 CFR 60.485(b), except as provided in 40 CFR 60.482-1(c) and 40 CFR 60.482-2(d), (e), and (f). Each pump in light liquid service shall be checked by visual inspection each calendar week for indications of liquids dripping from the pump seal. A leak is detected if an instrument reading of 10,000 ppm or greater is measured or if there are indications of liquids dripping from the pump seal. [40 CFR 60.482-2(a) and (b)] Federally Enforceable Through Title V Permit
89. When a leak is detected for each PLLS, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in 40 CFR 60.482-9. A first attempt at repair shall be made no later than 5 calendar days after each leak is detected. [40 CFR 60.482-2(c)] Federally Enforceable Through Title V Permit
90. Each PLLS equipped with a dual mechanical seal system that includes a barrier fluid system is exempt from the requirements of 40 CFR 60.482-2(a) provided the requirements specified in 40 CFR 60.482-2(d)(1) through (6) are met. [40 CFR 60.482(d)] Federally Enforceable Through Title V Permit
91. Any PLLS that is designated, as described in 40 CFR 60.486(e)(1) and (2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of 40 CFR 60.482-2(a), (c), and (d) if the pump meets the requirements specified in 40 CFR 60.482-2(e)(1), (2), and (3). [40 CFR 60.482-2(e)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

92. If any PLLS is equipped with a closed vent system capable of capturing and transporting leakage from the seal or seals to a control device that complies with the requirements of 40 CFR 60.482-10, it is exempt from the requirements of 40 CFR 60.482-2(a) through (e). [40 CFR 60.482-2(f)] Federally Enforceable Through Title V Permit
93. Any pump in PLLS that is designated, as described in 40 CFR 60.486(f)(1), as an unsafe-to-monitor pump is exempt from the monitoring and inspection requirements of 40 CFR 60.482-2(a) and 40 CFR 60.482-2(d)(4) through (6) if: 1) The owner or operator of the pump demonstrates that the pump is unsafe-to-monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with 40 CFR 60.482-2(a); and 2) The owner or operator of the pump has a written plan that requires monitoring of the pump as frequently as practicable during safe-to-monitor times but not more frequently than the periodic monitoring schedule otherwise applicable, and repair of the equipment according to the procedures in 40 CFR 60.482-2(c) if a leak is detected. [40 CFR 60.482-2(g)] Federally Enforceable Through Title V Permit
94. Any pump that is located within the boundary of an unmanned plant site is exempt from the weekly visual inspection requirement of 40 CFR 60.482-2(a)(2) and (d)(4) and the daily requirements of 40 CFR 60.482-2(d)(5), provided that each pump is visually inspected as often as practicable and at least monthly. [40 CFR 60.482-2(h)] Federally Enforceable Through Title V Permit
95. Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in 40 CFR 60.485(c). [40 CFR 60.482-4(a)] Federally Enforceable Through Title V Permit
96. After each pressure release, the pressure relief device shall be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after the pressure release, except as provided in 40 CFR 60.482-9. No later than 5 calendar days after the pressure release, the pressure relief device shall be monitored to confirm the conditions of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, by the methods specified in 40 CFR 60.485(c). [40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
97. Any pressure relief device that is routed to a process or fuel gas system or equipped with a closed vent system capable of capturing and transporting leakage through the pressure relief device to a control device as described in 40 CFR 60.482-10 is exempted from the requirements of 40 CFR 60.482-4(a) and (b). [40 CFR 60.482-4(c)] Federally Enforceable Through Title V Permit
98. Any pressure relief device that is equipped with a rupture disk upstream of the pressure relief device is exempt from the 40 CFR 60.482-4(a) and (b), provided the owner or operator complies with the requirements in 40 CFR 60.482-4(d)(2) of this section. After each pressure release, a new rupture disk shall be installed upstream of the pressure relief device as soon as practicable, but no later than 5 calendar days after each pressure release, except as provided in 40 CFR 60.482-9. [40 CFR 60.482-4(d)] Federally Enforceable Through Title V Permit
99. Except for in-situ sampling systems and sampling systems without purges, each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in 40 CFR 60.482-1(c). Each closed-purge, closed-loop, or closed-vent system shall comply with the requirements specified in 40 CFR 60.482-5(b)(1), (2), (3), and (4). [40 CFR 60.482-5(a), (b), and (c)] Federally Enforceable Through Title V Permit
100. Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in 40 CFR 60.482-1(c). The cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring process fluid flow through the open-ended valve or line. When a double block-and-bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with this condition at all other times. [40 CFR 60.482-6(a) and (c)] Federally Enforceable Through Title V Permit
101. Each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the process fluid end is closed before the second valve is closed. [40 CFR 60.482-6(b)] Federally Enforceable Through Title V Permit
102. Open-ended valves or lines in an emergency shutdown system which are designed to open automatically in the event of a process upset are exempt from the requirements of 40 CFR 60.482-6(a), (b) and (c). [40 CFR 60.482-6(d)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

103. Open-ended valves or lines containing materials which would autocatalytically polymerize or would present an explosion, serious overpressure, or other safety hazard if capped or equipped with a double block and bleed system as specified in 40 CFR 60.482-6(a) through (c) are exempt from the requirements of 40 CFR 60.482-6(a) through (c). [40 CFR 60.482-6(e)] Federally Enforceable Through Title V Permit
104. Each valve in gas/vapor service and in light liquid service shall be monitored monthly to detect leaks by the methods specified in 40 CFR 60.485(b) and shall comply with 40 CFR 60.482-7(b) through (e), except as provided in 40 CFR 60.482-7(f), (g), and (h), 40 CFR 60.483-1, 40 CFR 60.483-2, and 40 CFR 60.482-1(c). A leak is detected if an instrument reading of 10,000 ppm or greater is measured. [40 CFR 60.482-7(a) and (b)] Federally Enforceable Through Title V Permit
105. Any valve in gas/vapor service or in light liquid service for which a leak is not detected for 2 successive months may be monitored the first month of every quarter, beginning with the next quarter, until a leak is detected. If a leak is detected, the valve shall be monitored monthly until a leak is not detected for 2 successive months. [40 CFR 60.482-7(c)] Federally Enforceable Through Title V Permit
106. When a leak is detected for any valve in gas/vapor service or in light liquid service, it shall be repaired as soon as practicable, but no later than 15 calendar days after the leak is detected, except as provided in 40 CFR 60.482-9. A first attempt at repair shall be made no later than 5 calendar days after each leak is detected. First attempts at repair include, but are not limited to, the best practices specified in 40 CFR 60.482-7(e)(1), (2), (3), and (4), where practicable. [40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
107. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(e)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of 40 CFR 60.482-7(a) if the valve meets the requirements specified in 40 CFR 60.482-7(f)(1), (2), and (3). [40 CFR 60.482-7(f)] Federally Enforceable Through Title V Permit
108. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(f)(1), as an unsafe-to-monitor valve is exempt from the requirements of 40 CFR 60.482-7(a) if: 1) The owner or operator of the valve demonstrates that the valve is unsafe to monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with 40 CFR 60.482-7(a); and 2) The owner or operator of the valve adheres to a written plan that requires monitoring of the valve as frequently as practicable during safe-to-monitor times. [40 CFR 60.482-7(g)] Federally Enforceable Through Title V Permit
109. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(f)(2), as a difficult-to-monitor valve is exempt from the requirements of 40 CFR 60.482-7(a) if: 1) The owner or operator of the valve demonstrates that the valve cannot be monitored without elevating the monitoring personnel more than 2 meters above a support surface; 2) The process unit within which the valve is located either becomes an affected facility through 40 CFR 60.14 or 40 CFR 60.15 or the owner or operator designates less than 3.0 percent of the total number of valves as difficult-to-monitor; and 3) The owner or operator of the valve follows a written plan that requires monitoring of the valve at least once per calendar year. [40 CFR 60.482-7(h)] Federally Enforceable Through Title V Permit
110. The owner or operator may elect to comply with the applicable provisions for valves in gas/vapor service and in light liquid service as specified in 40 CFR 60.483-1 and 60.483-2. [40 CFR 60.592(b)] Federally Enforceable Through Title V Permit
111. If evidence of a potential leak is found by visual, audible, olfactory, or any other detection method at pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors, the owner or operator shall follow either one of the following procedures: 1) The owner or operator shall monitor the equipment within 5 days by the method specified in 40 CFR 60.485(b) and shall comply with the requirements of 40 CFR 60.482-8(b) through (d); or 2) The owner or operator shall eliminate the visual, audible, olfactory, or other indication of a potential leak. A leak is detected if an instrument reading of 10,000 ppm or greater is measured. [40 CFR 60.482-8(a) and (b)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

112. When a leak is detected in pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in 40 CFR 60.482-9. The first attempt at repair shall be made no later than 5 calendar days after each leak is detected. First attempts at repair include, but are not limited to, the best practices described under 40 CFR 60.482-7(e). [40 CFR 60.482-8(c) and (d)] Federally Enforceable Through Title V Permit
113. For closed vent systems and control devices, vapor recovery systems shall be designed and operated to recover the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, whichever is less stringent. [40 CFR 60.482-10(b)] Federally Enforceable Through Title V Permit
114. For closed vent systems and control devices, enclosed combustion devices shall be designed and operated to reduce the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, on a dry basis, corrected to 3 percent oxygen, whichever is less stringent or to provide a minimum residence time of 0.75 seconds at a minimum temperature of 816 degrees C. [40 CFR 60.482-10(c)] Federally Enforceable Through Title V Permit
115. Flares used to comply with Subpart GGG shall comply with the requirements of 40 CFR 60.18. [40 CFR 60.482-10(d)] Federally Enforceable Through Title V Permit
116. Owners or operators of control devices used to comply with the provisions of Subpart GGG shall monitor these control devices to ensure that they are operated and maintained in conformance with their designs. [40 CFR 60.482-10(e)] Federally Enforceable Through Title V Permit
117. Except as provided in 40 CFR 60.482-10(i) through (k), each closed vent system used to comply with the provisions of Subpart GGG shall be inspected according to the procedures and schedule specified in 40 CFR 60.482-10(f)(1) and (f)(2). Leaks, as indicated by an instrument reading greater than 500 parts per million by volume above background or by visual inspections, shall be repaired as soon as practicable except as provided in 40 CFR 60.482-10(h). A first attempt at repair shall be made no later than 5 calendar days after the leak is detected. Repair shall be completed no later than 15 calendar days after the leak is detected. [40 CFR 60.482-10(f) and (g)] Federally Enforceable Through Title V Permit
118. Delay of repair of a closed vent system for which leaks have been detected is allowed if the repair is technically infeasible without a process unit shutdown or if the owner or operator determines that emissions resulting from immediate repair would be greater than the fugitive emissions likely to result from delay of repair. Repair of such equipment shall be complete by the end of the next process unit shutdown. [40 CFR 60.482-10(h)] Federally Enforceable Through Title V Permit
119. If a vapor collection system or closed vent system is operated under a vacuum, it is exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2). [40 CFR 60.482-10(i)] Federally Enforceable Through Title V Permit
120. Any parts of the closed vent system that are designated, as described in 40 CFR 60.482-10(l)(1), as unsafe to inspect are exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2) if they comply with the requirements specified in 40 CFR 60.482-10 (j)(1) and (j)(2). [40 CFR 60.482-10(j)] Federally Enforceable Through Title V Permit
121. Any parts of the closed vent system that are designated, as described in 40 CFR 60.482-10(l)(2), as difficult to inspect are exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2) if they comply with the requirements specified in 40 CFR 60.482-10(k)(1) through (k)(3). [40 CFR 60.482-10(k)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

122. The owner or operator shall record the following information: 1) Identification of all parts of the closed vent system that are designated as unsafe to inspect, an explanation of why the equipment is unsafe to inspect, and the plan for inspecting the equipment; 2) Identification of all parts of the closed vent system that are designated as difficult to inspect, an explanation of why the equipment is difficult to inspect, and the plan for inspecting the equipment; 3) For each inspection during which a leak is detected, a record of the information specified in 40 CFR 60.486(c); 4) For each inspection conducted in accordance with 40 CFR 60.485(b) during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected; and 5) For each visual inspection conducted in accordance with 40 CFR 60.482-10(f)(1)(ii) during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected. [40 CFR 60.482-10(l)] Federally Enforceable Through Title V Permit
123. Closed vent systems and control devices used to comply with provisions Subpart GGG shall be operated at all times when emissions may be vented to them. [40 CFR 60.482-10(m)] Federally Enforceable Through Title V Permit
124. In conducting the performance tests required in 40 CFR 60.8, the owner or operator shall use as reference methods and procedures the test methods in 40 CFR 60, Appendix A or other methods and procedures as specified in 40 CFR 60.485, except as provided in 40 CFR 60.8(b). [40 CFR 60.485(a)] Federally Enforceable Through Title V Permit
125. The owner or operator shall determine compliance with the standards in 40 CFR 60.482, 60.483, and 60.484 as follows: Method 21 shall be used to determine the presence of leaking sources. The instrument shall be calibrated before use each day of its use by the procedures specified in Method 21. The following calibration gases shall be used: (i) Zero air (less than 10 ppm of hydrocarbon in air); and (ii) A mixture of methane or n-hexane and air at a concentration of about, but less than, 10,000 ppm methane or n-hexane. [40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
126. The owner or operator shall determine compliance with the no detectable emission standards in 40 CFR 60.482-2(e), 60.482-3(i), 60.482-4, 60.482-7(f), and 60.482-10(e) as follows: 1) The requirements of 40 CFR 60.485(b) shall apply. 2) Method 21 shall be used to determine the background level. All potential leak interfaces shall be traversed as close to the interface as possible. The arithmetic difference between the maximum concentration indicated by the instrument and the background level is compared with 500 ppm for determining compliance. [40 CFR 60.485(c)] Federally Enforceable Through Title V Permit
127. The owner or operator shall test each piece of equipment unless demonstrated that a process unit is not in VOC service, i.e., that the VOC content would never be reasonably expected to exceed 10 percent by weight. For purposes of this demonstration, the following methods and procedures shall be used: 1) Procedures that conform to the general methods in ASTM E260-73, 91, or 96, E168-67, 77, or 92, E169-63, 77, or 93 (incorporated by reference as seen in 40 CFR 60.17) shall be used to determine the percent VOC content in the process fluid that is contained in or contacts a piece of equipment; 2) Organic compounds that are considered by the Administrator to have negligible photochemical reactivity may be excluded from the total quantity of organic compounds in determining the VOC content of the process fluid; and 3) Engineering judgment may be used to estimate the VOC content, if a piece of equipment had not been shown previously to be in service. If the Administrator disagrees with the judgment, the previous two procedures as specified in 40 CFR 60.485(d)(1) and (2) shall be used to resolve the disagreement. [40 CFR 60.485(d)] Federally Enforceable Through Title V Permit
128. The owner or operator shall demonstrate that an equipment is in light liquid service by showing that all the following conditions apply: 1) The vapor pressure of one or more of the components is greater than 0.3 kPa at 20 °C (1.2 in. H<sub>2</sub>O at 68 degrees F). Standard reference texts or ASTM D2879-83, 96, or 97 (incorporated by reference as seen in 40 CFR 60.17) shall be used to determine the vapor pressures; 2) The total concentration of the pure components having a vapor pressure greater than 0.3 kPa at 20 degrees Celsius is equal to or greater than 20 percent by weight; and 3) The fluid is a liquid at operating conditions. [40 CFR 60.485(e)] Federally Enforceable Through Title V Permit
129. Samples used in conjunction with 40 CFR 60.485(d), (e), and (g) shall be representative of the process fluid that is contained in or contacts the equipment or the gas being combusted in the flare. [40 CFR 60.485(f)] Federally Enforceable Through Title V Permit
130. The owner or operator shall determine compliance with the standards of flares as specified in 40 CFR 60.485(g)(1), (2), (3), (4), (5), (6), and (7). [40 CFR 60.485(g)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

131. An owner or operator of more than one affected facility subject to the provisions Subpart GGG may comply with the recordkeeping requirements for these facilities in one recordkeeping system if the system identifies each record by each facility. [40 CFR 60.486(a)] Federally Enforceable Through Title V Permit
132. When each leak is detected as specified in 40 CFR 60.482-2, 60.482-3, 60.482-7, 60.482-8, and 60.483-2, the following requirements apply: 1) A weatherproof and readily visible identification, marked with the equipment identification number, shall be attached to the leaking equipment; 2) The identification on a valve may be removed after it has been monitored for 2 successive months as specified in 40 CFR 60.482-7(c) and no leak has been detected during those 2 months; and 3) The identification on equipment except on a valve, may be removed after it has been repaired. [40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
133. When each leak is detected as specified in 40 CFR 60.482-2, 60.482-3, 60.482-7, 60.482-8, and 60.483-2, the following information shall be recorded in a log and shall be kept for 5 years in a readily accessible location: 1) The instrument and operator identification numbers and the equipment identification number; 2) The date the leak was detected and the dates of each attempt to repair the leak; 3) Repair methods applied in each attempt to repair the leak; 4) "Above 10,000" if the maximum instrument reading measured by the methods specified in 40 CFR 60.485(a) after each repair attempt is equal to or greater than 10,000 ppm; 5) "Repair delayed" and the reason for the delay if a leak is not repaired within 15 calendar days after discovery of the leak; 6) The signature of the owner or operator (or designate) whose decision it was that repair could not be effected without a process shutdown; 7) The expected date of successful repair of the leak if a leak is not repaired within 15 days; 8) Dates of process unit shutdown that occur while the equipment is unrepaired; and 9) The date of successful repair of the leak. [40 CFR 60.486(c) and District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
134. The following information pertaining to the design requirements for closed vent systems and control devices described in 40 CFR 60.482-10 shall be recorded and kept in a readily accessible location: 1) Detailed schematics, design specifications, and piping and instrumentation diagrams; 2) The dates and descriptions of any changes in the design specifications; 3) A description of the parameter or parameters monitored, as required in 40 CFR 60.482-10(e), to ensure that control devices are operated and maintained in conformance with their design and an explanation of why that parameter (or parameters) was selected for the monitoring; 4) Periods when the closed vent systems and control devices required in 40 CFR 60.482-2, 60.482-3, 60.482-4, and 60.482-5 are not operated as designed, including periods when a flare pilot light does not have a flame; and 5) Dates of startups and shutdowns of the closed vent systems and control devices required in 40 CFR 60.482-2, 60.482-3, 60.482-4, and 60.482-5. [40 CFR 60.486(d)] Federally Enforceable Through Title V Permit
135. The following information pertaining to all equipment subject to the requirements in 40 CFR 60.482-1 to 60.482-10 shall be recorded in a log that is kept in a readily accessible location: 1) A list of identification numbers for equipment subject to the requirements of Subpart GGG; 2) (i) A list of identification numbers for equipment that are designated for no detectable emissions under the provisions of 40 CFR 60.482-2(e), 60.482-3(i) and 60.482-7(f). (ii) The designation of equipment as subject to the requirements of 40 CFR 60.482-2(e), 60.482-3(i) and 60.482-7(f) shall be signed by the owner or operator; 3) A list of equipment identification numbers for pressure relief devices required to comply with §60.482-4; 4) (i) The dates of each compliance test as required in 40 CFR 60.482-2(e), 60.482-3(i), §60.482-4, and 60.482-7(f). (ii) The background level measured during each compliance test. (iii) The maximum instrument reading measured at the equipment during each compliance test; and 5) A list of identification numbers for equipment in vacuum service. [40 CFR 60.486(e)] Federally Enforceable Through Title V Permit
136. The following information pertaining to all valves subject to the requirements of 40 CFR 60.482-7(g) and (h) and to all pumps subject to the requirements of 40 CFR 60.482-2(g) shall be recorded in a log that is kept in a readily accessible location: 1) A list of identification numbers for valves and pumps that are designated as unsafe-to-monitor, an explanation for each valve or pump stating why the valve or pump is unsafe-to-monitor, and the plan for monitoring each valve or pump; and 2) A list of identification numbers for valves that are designated as difficult-to-monitor, an explanation for each valve stating why the valve is difficult-to-monitor, and the schedule for monitoring each valve. [40 CFR 60.486(f)] Federally Enforceable Through Title V Permit
137. The following information shall be recorded for valves complying with 40 CFR 60.483-2: 1) A schedule of monitoring; 2) The percent of valves found leaking during each monitoring period. [40 CFR 60.486(g)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

138. The following information shall be recorded in a log that is kept in a readily accessible location: 1) Design criterion required in 40 CFR 60.482-2(d)(5) and 60.482-3(e)(2) and explanation of the design criterion; and 2) Any changes to this criterion and the reasons for the changes. [40 CFR 60.486(h)] Federally Enforceable Through Title V Permit
139. The following information shall be recorded in a log that is kept in a readily accessible location for use in determining exemptions as provided in 40 CFR 60.480(d): 1) An analysis demonstrating the design capacity of the affected facility; 2) A statement listing the feed or raw materials and products from the affected facilities and an analysis demonstrating whether these chemicals are heavy liquids or beverage alcohol; and 3) An analysis demonstrating that equipment is not in VOC service. [40 CFR 60.486(i)] Federally Enforceable Through Title V Permit
140. Information and data used to demonstrate that a piece of equipment is not in VOC service shall be recorded in a log that is kept in a readily accessible location. [40 CFR 60.486(j)] Federally Enforceable Through Title V Permit
141. The provisions of 40 CFR 60.7 (b) and (d) do not apply to affected facilities subject to Subpart GGG. [District 40 CFR 60.486(k)] Federally Enforceable Through Title V Permit
142. All semiannual reports to the Administrator shall include the following information, summarized from the information in 40 CFR 60.486: 1) Process unit identification; 2) For each month during the semiannual reporting period, i) Number of valves for which leaks were detected as described in 40 CFR 60.482-7(b) or 40 CFR 60.483-2, (ii) Number of valves for which leaks were not repaired as required in 40 CFR 60.482-7(d)(1), (iii) Number of pumps for which leaks were detected as described in 40 CFR 60.482-2(b) and (d)(6)(i), (iv) Number of pumps for which leaks were not repaired as required in 40 CFR 60.482-2(c)(1) and (d)(6)(ii), (v) Number of compressors for which leaks were detected as described in 40 CFR 60.482-3(f), (vi) Number of compressors for which leaks were not repaired as required in 40 CFR 60.482-3(g)(1), and (vii) The facts that explain each delay of repair and, where appropriate, why a process unit shutdown was technically infeasible; 3) Dates of process unit shutdowns which occurred within the semiannual reporting period; 4) Revisions to items reported in the semiannual report if changes have occurred since the initial report, as required in 40 CFR 60.487 (a) and (b), or subsequent revisions to the initial report. [40 CFR 60.487(c)] Federally Enforceable Through Title V Permit
143. An owner or operator electing to comply with the provisions of 40 CFR 60.483-1 and 60.483-2 shall notify the Administrator of the alternative standard selected 90 days before implementing either of the provisions. [40 CFR 60.487(d)] Federally Enforceable Through Title V Permit
144. An owner or operator shall report the results of all performance tests in accordance with 40 CFR 60.8 of the General Provisions. The provisions of 40 CFR 60.8(d) do not apply to affected facilities subject to the provisions of Subpart GGG except that an owner or operator must notify the Administrator of the schedule for the initial performance tests at least 30 days before the initial performance tests. [40 CFR 60.487(e)] Federally Enforceable Through Title V Permit
145. The semiannual reporting requirements of 40 CFR 60.487(a), (b), and (c) remain in force until and unless EPA, in delegating enforcement authority to a State under section 111(c) of the Act, approves reporting requirements or an alternative means of compliance surveillance adopted by such State. In that event, affected sources within the State will be relieved of the obligation to comply with the requirements of 40 CFR 60.487(a), (b), and (c), provided that they comply with the requirements established by the State. [40 CFR 60.487(f)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

146. Compressors are exempt from the standards of Subpart GGG if the owner or operator demonstrates that a compressor is in hydrogen service. Each compressor is presumed not to be in hydrogen service unless an owner or operator demonstrates that the piece of equipment is in hydrogen service. For a piece of equipment to be considered in hydrogen service, it must be determined that the percent hydrogen content can be reasonably expected always to exceed 50 percent by volume. For purposes of determining the percent hydrogen content in the process fluid that is contained in or contacts a compressor, procedures that conform to the general method described in ASTM E-260, E-168, or E-169 shall be used. An owner or operator may use engineering judgment demonstrate that the percent content exceeds 50 percent by volume, provided the engineering judgment demonstrates that the content clearly exceeds 50 percent by volume. When an owner or operator and the Administrator do not agree on whether a piece of equipment is in hydrogen service, however, the procedures that conform to the general method described in ASTM E-260, E-168, or E-169 shall be used to resolve the disagreement. If an owner or operator determines that a piece of equipment is in hydrogen service, the determination can be revised only after following the procedures that conform to the general method described in ASTM E-260, E-168, or E-169. [40 CFR 60.593(b)] Federally Enforceable Through Title V Permit
147. Any existing reciprocating compressor that becomes an affected facility under provisions of 40 CFR 60.14 or 40 CFR 60.15 is exempt from 40 CFR 60.482-3 (a), (b), (c), (d), (e), and (h) provided the owner or operator demonstrates that recasting the distance piece or replacing the compressor are the only options available to bring the compressor into compliance with the provisions of 40 CFR 60.482-3 (a), (b), (c), (d), (e), and (h). [40 CFR 60.593(c)] Federally Enforceable Through Title V Permit
148. An owner or operator may use the following provision in addition to 40 CFR 60.485(e): Equipment is in light liquid service if the percent evaporated is greater than 10 percent at 150 °C as determined by ASTM Method D86-78, 82, 90, 95, or 96. [40 CFR 60.593(d)] Federally Enforceable Through Title V Permit
149. Pumps in light liquid service and valves in gas/vapor and light liquid service within a procesic compounds of usually high molecular weight that consist of many repeated links, each link being a relatively light and simple molecule. [40 CFR 60.593(e)] Federally Enforceable Through Title V Permit
150. Equipment that is in vacuum service is excluded from the requirements of 40 CFR 60.482-2 to 40 CFR 60.482-10 if it is identified as required in 40 CFR 60.486(e)(5). [40 CFR 60.482-1(d)] Federally Enforceable Through Title V Permit
151. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
152. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
153. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
154. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
155. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
156. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60-107(d)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

157. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
158. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
159. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
160. Compliance with permit conditions in the Title V permit shall be deemed compliance with 40 CFR 60 Subpart GGG. A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
161. {4194} Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NOx emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NOx emission limit listed in Rule 4320. [District Rule 4320]
162. {4253} Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** S-33-59-15

**EXPIRATION DATE:** 08/31/2007

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

42 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H6 - AREA 2

## PERMIT UNIT REQUIREMENTS

1. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
2. Emission rates shall not exceed any of the following limits: PM10: 0.001 lb/MMBtu, SOx (as SO2): 0.214 lb/MMBtu, NOx (as NO2): 0.130 lb/MMBtu, VOC: 0.003 lb/MMBtu and CO: 47 ppmv @ 3% O2 or 0.0347 lb/MMBtu. [District NSR Rule and Rules 4305 and 4306] Federally Enforceable Through Title V Permit
3. Boiler shall operate as a replacement/emergency standby unit for the following primary units: boiler 81-H9 (S-33-348), boiler 81-H1 (S-33-17), heaters 9H1-4 (S-33-12), heaters 22H11-14 (S-33-53), and/or heater 20H11 (S-33-55). Simultaneous operation of the replacement/emergency standby unit and a primary unit shall not occur except for startup and shutdown of the primary unit. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
4. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of natural gas combusted in the unit shall be installed, utilized and maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
5. Maximum annual heat input of the boiler shall not exceed 9 billion Btu per calendar year. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
6. Owner/operator shall have unit tuned at least twice each calendar year, from four to eight months apart, in which it operates, by a technician that is qualified, to the satisfaction of the APCO, in accordance with the procedure described in Rule 4304 (Equipment Tuning Procedure for Boilers, Steam Generators, and Process Heaters). [District Rule 4306] Federally Enforceable Through Title V Permit
7. If the unit does not operate throughout a continuous six-month period within a calendar year, only one tune-up is required for that calendar year. No tune-up is required for any unit that is not operated during that calendar year; this unit may be test fired to verify availability of the unit for its intended use, but once the test firing is completed the unit shall be shutdown. [District Rule 4306] Federally Enforceable Through Title V Permit
8. The permittee shall monitor, at least on a monthly basis, the amount of water use, steam production and other operational characteristics recommended by the unit manufacturer. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
9. Records of tune-up and monitoring of the operational characteristics of the unit shall be maintained. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
10. Records of monthly and annual heat input of the unit shall be maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

11. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
12. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
13. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
14. {588} Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
15. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
16. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
17. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
18. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
19. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
20. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
21. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
22. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
23. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
24. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
25. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

26. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
27. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
28. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
29. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit
30. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
31. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit
32. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
33. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
34. A component shall be considered leaking if one of more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit
35. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

36. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit
37. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
38. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
39. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
40. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit
41. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit
42. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455, 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
43. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
44. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

45. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit
46. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
47. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
48. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
49. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit
50. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit
51. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

52. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit
53. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
54. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
55. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
56. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
57. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit
58. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
59. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
60. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

61. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit
62. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit
63. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
64. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
65. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
66. {4194} Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NOx emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NOx emission limit listed in Rule 4320. [District Rule 4320]
67. {4253} Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** S-33-61-15

**EXPIRATION DATE:** 08/31/2007  
**DRAFT**

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

.8 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H8 - AREA 2

## PERMIT UNIT REQUIREMENTS

1. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
2. Emission rates shall not exceed any of the following limits: PM10: 0.001 lb/MMBtu, SO<sub>x</sub> (as SO<sub>2</sub>): 0.214 lb/MMBtu, NO<sub>x</sub> (as NO<sub>2</sub>): 0.130 lb/MMBtu, VOC: 0.003 lb/MMBtu and CO: 47 ppmv @ 3% O<sub>2</sub> or 0.0347 lb/MMBtu. [District NSR Rule and Rules 4305 and 4306] Federally Enforceable Through Title V Permit
3. Boiler shall operate as a replacement/emergency standby unit for the following primary units: boiler 81-H9 (S-33-348), boiler 81-H1 (S-33-17), heaters 9H1-4 (S-33-12), heaters 22H11-14 (S-33-53), and/or heater 20H11 (S-33-55). Simultaneous operation of the replacement/emergency standby unit and a primary unit shall not occur except for startup and shutdown of the primary unit. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
4. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of natural gas combusted in the unit shall be installed, utilized and maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
5. Maximum annual heat input of the boiler shall not exceed 9 billion Btu per calendar year. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
6. Owner/operator shall have unit tuned at least twice each calendar year, from four to eight months apart, in which it operates, by a technician that is qualified, to the satisfaction of the APCO, in accordance with the procedure described in Rule 4304 (Equipment Tuning Procedure for Boilers, Steam Generators, and Process Heaters). [District Rule 4306] Federally Enforceable Through Title V Permit
7. If the unit does not operate throughout a continuous six-month period within a calendar year, only one tune-up is required for that calendar year. No tune-up is required for any unit that is not operated during that calendar year; this unit may be test fired to verify availability of the unit for its intended use, but once the test firing is completed the unit shall be shutdown. [District Rule 4306] Federally Enforceable Through Title V Permit
8. The permittee shall monitor, at least on a monthly basis, the amount of water use, steam production and other operational characteristics recommended by the unit manufacturer. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
9. Records of tune-up and monitoring of the operational characteristics of the unit shall be maintained. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
10. Records of monthly and annual heat input of the unit shall be maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

11. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
12. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NOx and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
13. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
14. {588} Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO2, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
15. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO2. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
16. If the unit is fired on noncertified gaseous fuel and compliance with SOx emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
17. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
18. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
19. Nitrogen oxide (NOx) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO2/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
20. Nitrogen oxide (NOx) emissions shall not exceed 140 lb/hr, calculated as NO2. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
21. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H2S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
22. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
23. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H2S as measured by the H2S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO2 as measured by the SO2 continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
24. Operator shall determine compliance with the H2S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
25. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

26. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
27. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1 wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
28. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
29. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit
30. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
31. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit
32. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
33. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
34. A component shall be considered leaking if one of more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit
35. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

36. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit
37. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
38. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
39. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
40. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit
41. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit
42. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455, 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
43. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
44. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

45. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit
46. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
47. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
48. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
49. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit
50. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit
51. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

52. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit
53. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
54. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
55. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
56. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
57. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit
58. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
59. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
60. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

61. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit
62. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit
63. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
64. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
65. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
66. {4194} Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NOx emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NOx emission limit listed in Rule 4320. [District Rule 4320]
67. {4253} Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320]

These terms and conditions are part of the Facility-wide Permit to Operate.

DRAFT

# ATTACHMENT B

Authorities to Construct No.  
(S-33-49-5, '52-12, '59-13, '61-13)



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** S-33-49-5

**ISSUANCE DATE:** 05/17/2007

**LEGAL OWNER OR OPERATOR:** BIG WEST OF CA, LLC  
**MAILING ADDRESS:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**LOCATION:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 161.4 MM BTU/HR CRUDE UNIT #11 INCLUDING HEATERS 11-H11, 11-H12, AND 11-H13, AND TOPPING ASSEMBLY - AREA 2: DESIGNATE HEATERS 11-H11 AND 11-H12 AS DORMANT EMISSIONS UNIT (DEU) FOR RULE 4306 COMPLIANCE (NON-COMPLIANT DEU)

### CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. Heaters 11-H11 and 11-H12 shall not be operated for any reason until necessary retrofits are made to comply with the applicable requirements of District Rules 4305, 4306 and 4351. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
3. No modifications to heaters 11-H11 and 11-H12 shall be performed without an Authority to Construct for that modification(s), except for changes specified in the condition below. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
4. The fuel supply line(s) shall be physically disconnected from heaters 11-H11 and 11-H12. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
5. Heaters 11-H11 and 11-H12 shall not be operated unless the owner or operator applies to modify the Title V permit to address the requirements of District Rule 2520, 9.0 for this permit unit. [District Rule 2520, 9.0] Federally Enforceable Through Title V Permit
6. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO



DAVID WARNER, Director of Permit Services  
S-33-49-5 - Jul 7 2010 11:13AM - TOMS - Joint Inspection NOT Required

7. Gas plant Heater 11-H13 is in service as part of hydro unit #27 S-33-349 as heater 27H-1. [District NSR Rule] Federally Enforceable Through Title V Permit
8. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
9. Spent caustics and waste liquids shall be disposed of in a manner preventing the creation of odors. [District Rule 4102] Federally Enforceable Through Title V Permit
10. Heat exchangers utilizing cooling water shall be maintained to prevent volatile organic compound emissions from cooling towers. [District NSR Rule] Federally Enforceable Through Title V Permit
11. Heaters 11-H11 and 11-H12 emission rates shall not exceed NO<sub>x</sub> (as NO<sub>2</sub>): 0.036 lb/MMBtu or 30 ppmv @ 3% O<sub>2</sub>, or CO: 400 ppmv @ 3% O<sub>2</sub>. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
12. A source test to demonstrate compliance with the indicated emission limits shall be performed within 60 days of recommencing operation of heaters 11-H11 or 11-H12. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
13. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
14. All required source testing shall conform to the compliance testing procedures described in District Rule 1081(Last Amended December 19, 1993). [District Rule 1081, and Kern County Rule 108.1] Federally Enforceable Through Title V Permit
15. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
16. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. Compliance with this requirement may be demonstrated by testing the sulfur content of each fuel and determining the maximum hourly emissions of sulfur compounds by multiplying the sulfur content of each fuel in lb/MMBtu by the maximum heat input rating of the unit; or by source testing in combination with fuel analysis. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
17. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit and sulfur emission limits has been demonstrated for 8 consecutive weeks for a fuel source, then the fuel testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
18. When complying with SO<sub>x</sub> emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6B; or Method 8; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by GC-FPD/TCD performed in the laboratory and EPA Method 19 to calculated emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
19. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
20. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

21. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). To demonstrate compliance with this requirement the operator shall test the sulfur content of each fuel source and demonstrate the sulfur content does not exceed 3.3% by weight for gaseous fuels; or determine that the concentration of sulfur compounds in the exhaust does not exceed the concentration limit by a combination of source testing and fuel analysis. [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
22. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
23. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
24. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1 wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
25. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
26. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit
27. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
28. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit
29. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
30. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
31. A component shall be considered leaking if one or more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

32. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
33. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit
34. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
35. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
36. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
37. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit
38. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit
39. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455, 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
40. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
41. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

42. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit
43. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
44. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
45. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
46. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit
47. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit
48. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

49. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit
50. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
51. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
52. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
53. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
54. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit
55. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
56. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
57. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit
58. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

59. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit
60. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
61. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
62. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
63. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
64. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
65. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
66. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
67. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
68. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
69. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** S-33-52-12

**ISSUANCE DATE:** 05/17/2007

**LEGAL OWNER OR OPERATOR:** BIG WEST OF CA, LLC  
**MAILING ADDRESS:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**LOCATION:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 86.8 MM BTU/HR CATALYTIC REFORMING UNIT #26 INCLUDING A DEPENTANIZER SERVICE TOWER (26-V13), REBOILER STEAM CONDENSATE BALANCE DRUM (26-D31), 2 FEED/BOTTOMS EXCHANGERS (26-E45 A/B), 2 OVERHEAD CONDENSERS (26-E46 A/B), DISTILLATE COOLER (26-E47), 2 BOTTOMS PUMPS (26-P37 A/B), AND 2 REFLUX PUMPS (26 P38 A/B): RETROFIT HEATER 26-H11A/B WITH A 26.9 MMBTU/HR JOHN ZINK MODEL LPMW-211 LOW NOX BURNER TO ACHIEVE 30 PPMV NOX @ 3% O2 (0.0364 LB-NOX/MMBTU) AND RETROFIT HEATER 26-H13/15 WITH A 11.7 MMBTU/HR JOHN ZINK MODEL LPMW-216 LOW NOX BURNER TO ACHIEVE 30 PPMV NOX @ 3% O2 (0.0364 LB-NOX/MMBTU) AND DESIGNATE HEATERS 26-H12 AND 26-H17 AS DORMANT EMISSIONS UNITS (DEU) FOR RULE 4306 COMPLIANCE (NON-COMPLIANT DEU)

## CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. Heaters 26H12 and 26H17 shall not be operated for any reason until necessary retrofits are made to comply with the applicable requirements of District Rules 4305, 4306 and 4351. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
3. No modifications to heaters 26H12 and 26H17 shall be performed without an Authority to Construct for that modification(s), except for changes specified in the condition below. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
4. The fuel supply line(s) shall be physically disconnected from heaters 26H12 and 26H17. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO



DAVID WARNER, Director of Permit Services

S-33-52-12: Jul 7 2010 11:13AM - TOMS : Joint Inspection NOT Required

5. Fuel gas sulfur content (as H<sub>2</sub>S) shall not exceed 0.10 gr/dscf (160 ppmv) over a three-hour rolling average and shall be continuously monitored and recorded. [NSPS 40 CFR Part 60, Subpart J] Federally Enforceable Through Title V Permit
6. Permittee shall meet all applicable requirements of NSPS Subparts A, J, and GGG. [NSPS 40 CFR Part 60, Subparts A, J, and GGG] Federally Enforceable Through Title V Permit
7. Spent caustics and waste liquids shall be disposed of in a manner preventing the creation of odors. [District Rule 4102] Federally Enforceable Through Title V Permit
8. Leaks from valves and connectors associated with depentanizer (26-V13) fractionation trays, reboiler steam condensate balance drum (26-D31), 2 feed/bottoms exchangers (26-E45 A/B), 2 overhead condensers (26-E46 A/B), distillate cooler (26-E47), 2 bottoms pumps (26-P37 A/B), 2 reflux pumps (26 P38 A/B) and subject to the provisions of Rule 4455 shall be defined as a reading of methane on a portable hydrocarbon detection instrument in excess of 100 ppmv above background when measured one (1) cm from potential source. [District NSR Rule] Federally Enforceable Through Title V Permit
9. Leaks from seals on pumps 26-P37A/B and 26-P38A/B and subject to the provisions of Rule 4455 shall be defined as a reading of methane on a portable hydrocarbon detection instrument in excess of 500 ppmv above background when measured one (1) cm from potential source. [District NSR Rule] Federally Enforceable Through Title V Permit
10. Vessels shall be depressurized (during turnaround) as required by Rule 4454. [District Rule 4454] Federally Enforceable Through Title V Permit
11. Fugitive volatile organic compound (VOC) emissions, as determined by annual component count and District approved emission factors, shall not exceed 761.4 lb/day. [District NSR Rule] Federally Enforceable Through Title V Permit
12. Heaters 26H12 and 26H17 emission rates shall not exceed NO<sub>x</sub> (as NO<sub>2</sub>): 0.18 lb/MMBtu or 147 ppmvd @ 3% O<sub>2</sub>, and CO: 400 ppmvd @ 3% O<sub>2</sub>. Emission limits are on a one hour average. [District Rules 2201, 4305, & 4351] Federally Enforceable Through Title V Permit
13. Emissions from heaters 26H11A/B, 26H13 and 26H15 shall not exceed any of the following limits: 0.0364 lb/MMBtu or 30 ppmvd NO<sub>x</sub> @ 3% O<sub>2</sub>, 0.024 lb-SO<sub>x</sub>/MMBtu, 0.0076 lb-PM<sub>10</sub>/MMBtu, 400 ppmvd CO @ 3% O<sub>2</sub> or 0.296 lb-CO/MMBtu, or 0.0055 lb-VOC/MMBtu. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
14. For heaters 26H11A/B, 26H13 and 26H15, the permittee shall monitor and record the stack concentration of NO<sub>x</sub>, CO, and O<sub>2</sub> at least once every month (in which a source test is not performed) using a portable emission monitor that meets District specifications. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
15. If either the NO<sub>x</sub> or CO concentrations corrected to 3% O<sub>2</sub>, as measured by the portable analyzer, exceed the allowable emissions concentration, the permittee shall return the emissions to within the acceptable range as soon as possible, but no longer than 1 hour of operation after detection. If the portable analyzer readings continue to exceed the allowable emissions concentration after 1 hour of operation after detection, the permittee shall notify the District within the following 1 hour and conduct a certified source test within 60 days of the first exceedance. In lieu of conducting a source test, the permittee may stipulate a violation has occurred, subject to enforcement action. The permittee must then correct the violation, show compliance has been re-established, and resume monitoring procedures. If the deviations are the result of a qualifying breakdown condition pursuant to Rule 1100, the permittee may fully comply with Rule 1100 in lieu of the performing the notification and testing required by this condition. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
16. All alternate monitoring parameter emission readings shall be taken with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. The analyzer shall be calibrated, maintained, and operated in accordance with the manufacturer's specifications and recommendations or a protocol approved by the APCO. Emission readings taken shall be averaged over a 15 consecutive-minute period by either taking a cumulative 15 consecutive-minute sample reading or by taking at least five (5) readings, evenly spaced out over the 15 consecutive-minute period. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

17. The permittee shall maintain records of: (1) the date and time of NO<sub>x</sub>, CO, and O<sub>2</sub> measurements, (2) the O<sub>2</sub> concentration in percent and the measured NO<sub>x</sub> and CO concentrations corrected to 3% O<sub>2</sub>, (3) make and model of exhaust gas analyzer, (4) exhaust gas analyzer calibration records, and (5) a description of any corrective action taken to maintain the emissions within the acceptable range. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
18. All emissions measurements shall be made with the unit operating either at conditions representative of normal operations or conditions specified in the Permit to Operate. No determination of compliance shall be established within two hours after a continuous period in which fuel flow to the unit is shut off for 30 minutes or longer, or within 30 minutes after a re-ignition as defined in Section 3.0 of District Rule 4306. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
19. Source testing for the indicated emission limits shall be performed within 60 days of recommencing operation of heaters 26H12 or 26H17. [District Rules 4305, 4306 and 4351] Federally Enforceable Through Title V Permit
20. Source testing to measure NO<sub>x</sub> and CO emissions from heaters 26H11A/B, 26H13 and 26H15 while fired on natural gas shall be conducted within 60 days of initial start-up. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
21. Source testing to measure NO<sub>x</sub> and CO emissions from heaters 26H11A/B, 26H13 and 26H15 while fired on natural gas shall be conducted at least once every twelve (12) months. After demonstrating compliance on two (2) consecutive annual source tests, the unit shall be tested not less than once every thirty-six (36) months. If the result of the 36-month source test demonstrates that the unit does not meet the applicable emission limits, the source testing frequency shall revert to at least once every twelve (12) months. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
22. The source test plan shall identify which basis (ppmv or lb/MMBtu) will be used to demonstrate compliance. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
23. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
24. NO<sub>x</sub> emissions for source test purposes shall be determined using EPA Method 7E or ARB Method 100 on a ppmv basis, or EPA Method 19 on a heat input basis. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
25. CO emissions for source test purposes shall be determined using EPA Method 10 or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
26. Stack gas oxygen (O<sub>2</sub>) shall be determined using EPA Method 3 or 3A or ARB Method 100. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
27. For emissions source testing, the arithmetic average of three 30-consecutive-minute test runs shall apply. If two of three runs are above an applicable limit the test cannot be used to demonstrate compliance with an applicable limit. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
28. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
29. Compliance with fugitive VOC emission limit shall be demonstrated by annual component count and District approved emission factors. [District NSR Rule] Federally Enforceable Through Title V Permit
30. Permittee shall maintain records of hhv of fuel burned and cumulative annual fuel use for a period of five years and shall make such records readily available for District inspection upon request. [District NSR Rule] Federally Enforceable Through Title V Permit
31. Heaters 26H12 and 26H17 shall not be operated unless the owner or operator applies to modify the Title V permit to address the requirements of District Rule 2520, section 9.0 for this permit unit. [District Rule 2520, 9.0] Federally Enforceable Through Title V Permit
32. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

33. If permittee fails any compliance demonstration for NOx and CO emission limits when testing not less than once every 36 months, compliance with NOx and CO emission limits shall be demonstrated not less than once every 12 months. [District Rules 2520, 9.3.2, 4305 and 4351] Federally Enforceable Through Title V Permit
34. Annual test results submitted to the District from unit(s) representing a group of units may be used to measure NOx emissions of this permit for that group, provided the selection of the representative unit(s) is approved by the APCO prior to testing. Should any of the representative units exceed the required NOx emission limits of this permit, each of the units in the group shall demonstrate compliance by emissions testing within 90 days of the failed test. (This requirement shall not supersede a more stringent NSR or PSD permit testing requirement.) [District Rules 2520, 9.3.2, 4305, 6.3.2, and 4351, 6.3] Federally Enforceable Through Title V Permit
35. The following conditions must be met for representative unit(s) to be used to test for NOx limits for a group of units: 1) all units are initially source tested and emissions from each unit in group are less than 90% of the permitted value and vary 25% or less from the average of all runs, 2) all units in group are similar in terms of rated heat input (rating not to exceed 100 MMBtu/hr), make and series, operation conditions, and control method, and 3) the group is owned by a single owner and located at a single stationary source. [District Rules 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
36. All units in a group for which representative units are source for NOx emissions shall have received the same maintenance and tune-up procedures as the representative unit(s). These tune-up procedures shall be completed according to District Rule 4304 (Adopted October 19, 1995) and tune-up test results shall show comparable results for each unit in the group. Records shall be maintained for each unit of the group including all preventative and corrective maintenance work done. [District Rule 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
37. All units in a group for which representative units are source tested for NOx emissions of this permit shall be fired on the same fuel type during the entire compliance period. If a unit switches for any time to an alternate fuel type (e.g. from natural gas to oil) then that unit shall not be considered part of the group and shall be required to undergo a source test for all fuel types used, within one year of the switch. [District Rules 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
38. The number of representative units source tested for NOx emissions shall be at least 30% of the total number of units in the group. The units included in the 30% shall be rotated, so that in 3 years, all units in the entire group will have been tested at least once. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
39. The portable analyzer shall be calibrated prior to each use with a two-point calibration method (zero and span). Calibration shall be performed with certified calibration gases. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
40. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NOx and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
41. All required source testing shall conform to the compliance testing procedures described in District Rule 1081(Last Amended December 19, 1993). [District Rule 1081, and Kern County Rule 108.1] Federally Enforceable Through Title V Permit
42. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
43. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. Compliance with this requirement may be demonstrated by testing the sulfur content of each fuel and determining the maximum hourly emissions of sulfur compounds by multiplying the sulfur content of each fuel in lb/MMBtu by the maximum heat input rating of the unit; or by source testing in combination with fuel analysis. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

44. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit and sulfur emission limits has been demonstrated for 8 consecutive weeks for a fuel source, then the fuel testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
45. When complying with SO<sub>x</sub> emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6B; or Method 8; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by GC-FPD/TCD performed in the laboratory and EPA Method 19 to calculated emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
46. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
47. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
48. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). To demonstrate compliance with this requirement the operator shall test the sulfur content of each fuel source and demonstrate the sulfur content does not exceed 3.3% by weight for gaseous fuels; or determine that the concentration of sulfur compounds in the exhaust does not exceed the concentration limit by a combination of source testing and fuel analysis. [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
49. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
50. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
51. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1 wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
52. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
53. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

54. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
55. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit
56. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
57. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
58. A component shall be considered leaking if one of more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit
59. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
60. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit
61. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
62. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
63. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
64. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

65. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit
66. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455, 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
67. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
68. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit
69. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit
70. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
71. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
72. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
73. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

74. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit
75. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit
76. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit
77. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
78. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
79. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
80. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
81. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit
82. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

83. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
84. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit
85. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit
86. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit
87. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
88. The owner or operator may apply to the Administrator for a determination of equivalency for any means of emission limitation that achieves a reduction in emissions of VOC at least equivalent to the reduction in emissions of VOC achieved by the controls required in Subpart GGG. In doing so, the owner or operator shall comply with the requirements of 40 CFR 60.484. [40 CFR 60.592(c)] Federally Enforceable Through Title V Permit
89. Each pump in light liquid service (PLLS) shall be monitored monthly to detect leaks by the methods specified in 40 CFR 60.485(b), except as provided in 40 CFR 60.482-1(c) and 40 CFR 60.482-2(d), (e), and (f). Each pump in light liquid service shall be checked by visual inspection each calendar week for indications of liquids dripping from the pump seal. A leak is detected if an instrument reading of 10,000 ppm or greater is measured or if there are indications of liquids dripping from the pump seal. [40 CFR 60.482-2(a) and (b)] Federally Enforceable Through Title V Permit
90. When a leak is detected for each PLLS, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in 40 CFR 60.482-9. A first attempt at repair shall be made no later than 5 calendar days after each leak is detected. [40 CFR 60.482-2(c)] Federally Enforceable Through Title V Permit
91. Each PLLS equipped with a dual mechanical seal system that includes a barrier fluid system is exempt from the requirements of 40 CFR 60.482-2(a) provided the requirements specified in 40 CFR 60.482-2(d)(1) through (6) are met. [40 CFR 60.482(d)] Federally Enforceable Through Title V Permit
92. Any PLLS that is designated, as described in 40 CFR 60.486(e)(1) and (2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of 40 CFR 60.482-2(a), (c), and (d) if the pump meets the requirements specified in 40 CFR 60.482-2(e)(1), (2), and (3). [40 CFR 60.482-2(e)] Federally Enforceable Through Title V Permit
93. If any PLLS is equipped with a closed vent system capable of capturing and transporting leakage from the seal or seals to a control device that complies with the requirements of 40 CFR 60.482-10, it is exempt from the requirements of 40 CFR 60.482-2(a) through (e). [40 CFR 60.482-2(f)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

94. Any pump in PLLS that is designated, as described in 40 CFR 60.486(f)(1), as an unsafe-to-monitor pump is exempt from the monitoring and inspection requirements of 40 CFR 60.482-2(a) and 40 CFR 60.482-2(d)(4) through (6) if: 1) The owner or operator of the pump demonstrates that the pump is unsafe-to-monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with 40 CFR 60.482-2(a); and 2) The owner or operator of the pump has a written plan that requires monitoring of the pump as frequently as practicable during safe-to-monitor times but not more frequently than the periodic monitoring schedule otherwise applicable, and repair of the equipment according to the procedures in 40 CFR 60.482-2(c) if a leak is detected. [40 CFR 60.482-2(g)] Federally Enforceable Through Title V Permit
95. Any pump that is located within the boundary of an unmanned plant site is exempt from the weekly visual inspection requirement of 40 CFR 60.482-2(a)(2) and (d)(4) and the daily requirements of 40 CFR 60.482-2(d)(5), provided that each pump is visually inspected as often as practicable and at least monthly. [40 CFR 60.482-2(h)] Federally Enforceable Through Title V Permit
96. Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in 40 CFR 60.485(c). [40 CFR 60.482-4(a)] Federally Enforceable Through Title V Permit
97. After each pressure release, the pressure relief device shall be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after the pressure release, except as provided in 40 CFR 60.482-9. No later than 5 calendar days after the pressure release, the pressure relief device shall be monitored to confirm the conditions of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, by the methods specified in 40 CFR 60.485(c). [40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
98. Any pressure relief device that is routed to a process or fuel gas system or equipped with a closed vent system capable of capturing and transporting leakage through the pressure relief device to a control device as described in 40 CFR 60.482-10 is exempted from the requirements of 40 CFR 60.482-4(a) and (b). [40 CFR 60.482-4(c)] Federally Enforceable Through Title V Permit
99. Any pressure relief device that is equipped with a rupture disk upstream of the pressure relief device is exempt from the 40 CFR 60.482-4(a) and (b), provided the owner or operator complies with the requirements in 40 CFR 60.482-4(d)(2) of this section. After each pressure release, a new rupture disk shall be installed upstream of the pressure relief device as soon as practicable, but no later than 5 calendar days after each pressure release, except as provided in 40 CFR 60.482-9. [40 CFR 60.482-4(d)] Federally Enforceable Through Title V Permit
100. Except for in-situ sampling systems and sampling systems without purges, each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in 40 CFR 60.482-1(c). Each closed-purge, closed-loop, or closed-vent system shall comply with the requirements specified in 40 CFR 60.482-5(b)(1), (2), (3), and (4). [40 CFR 60.482-5(a), (b), and (c)] Federally Enforceable Through Title V Permit
101. Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in 40 CFR 60.482-1(c). The cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring process fluid flow through the open-ended valve or line. When a double block-and-bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with this condition at all other times. [40 CFR 60.482-6(a) and (c)] Federally Enforceable Through Title V Permit
102. Each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the process fluid end is closed before the second valve is closed. [40 CFR 60.482-6(b)] Federally Enforceable Through Title V Permit
103. Open-ended valves or lines in an emergency shutdown system which are designed to open automatically in the event of a process upset are exempt from the requirements of 40 CFR 60.482-6(a), (b) and (c). [40 CFR 60.482-6(d)] Federally Enforceable Through Title V Permit
104. Open-ended valves or lines containing materials which would autocatalytically polymerize or would present an explosion, serious overpressure, or other safety hazard if capped or equipped with a double block and bleed system as specified in 40 CFR 60.482-6(a) through (c) are exempt from the requirements of 40 CFR 60.482-6(a) through (c). [40 CFR 60.482-6(e)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

105. Each valve in gas/vapor service and in light liquid service shall be monitored monthly to detect leaks by the methods specified in 40 CFR 60.485(b) and shall comply with 40 CFR 60.482-7(b) through (e), except as provided in 40 CFR 60.482-7(f), (g), and (h), 40 CFR 60.483-1, 40 CFR 60.483-2, and 40 CFR 60.482-1(c). A leak is detected if an instrument reading of 10,000 ppm or greater is measured. [40 CFR 60.482-7(a) and (b)] Federally Enforceable Through Title V Permit
106. Any valve in gas/vapor service or in light liquid service for which a leak is not detected for 2 successive months may be monitored the first month of every quarter, beginning with the next quarter, until a leak is detected. If a leak is detected, the valve shall be monitored monthly until a leak is not detected for 2 successive months. [40 CFR 60.482-7(c)] Federally Enforceable Through Title V Permit
107. When a leak is detected for any valve in gas/vapor service or in light liquid service, it shall be repaired as soon as practicable, but no later than 15 calendar days after the leak is detected, except as provided in 40 CFR 60.482-9. A first attempt at repair shall be made no later than 5 calendar days after each leak is detected. First attempts at repair include, but are not limited to, the best practices specified in 40 CFR 60.482-7(e)(1), (2), (3), and (4), where practicable. [40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
108. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(e)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of 40 CFR 60.482-7(a) if the valve meets the requirements specified in 40 CFR 60.482-7(f)(1), (2), and (3). [40 CFR 60.482-7(f)] Federally Enforceable Through Title V Permit
109. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(f)(1), as an unsafe-to-monitor valve is exempt from the requirements of 40 CFR 60.482-7(a) if: 1) The owner or operator of the valve demonstrates that the valve is unsafe to monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with 40 CFR 60.482-7(a); and 2) The owner or operator of the valve adheres to a written plan that requires monitoring of the valve as frequently as practicable during safe-to-monitor times. [40 CFR 60.482-7(g)] Federally Enforceable Through Title V Permit
110. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(f)(2), as a difficult-to-monitor valve is exempt from the requirements of 40 CFR 60.482-7(a) if: 1) The owner or operator of the valve demonstrates that the valve cannot be monitored without elevating the monitoring personnel more than 2 meters above a support surface; 2) The process unit within which the valve is located either becomes an affected facility through 40 CFR 60.14 or 40 CFR 60.15 or the owner or operator designates less than 3.0 percent of the total number of valves as difficult-to-monitor; and 3) The owner or operator of the valve follows a written plan that requires monitoring of the valve at least once per calendar year. [40 CFR 60.482-7(h)] Federally Enforceable Through Title V Permit
111. The owner or operator may elect to comply with the applicable provisions for valves in gas/vapor service and in light liquid service as specified in 40 CFR 60.483-1 and 60.483-2. [40 CFR 60.592(b)] Federally Enforceable Through Title V Permit
112. If evidence of a potential leak is found by visual, audible, olfactory, or any other detection method at pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors, the owner or operator shall follow either one of the following procedures: 1) The owner or operator shall monitor the equipment within 5 days by the method specified in 40 CFR 60.485(b) and shall comply with the requirements of 40 CFR 60.482-8(b) through (d); or 2) The owner or operator shall eliminate the visual, audible, olfactory, or other indication of a potential leak. A leak is detected if an instrument reading of 10,000 ppm or greater is measured. [40 CFR 60.482-8(a) and (b)] Federally Enforceable Through Title V Permit
113. When a leak is detected in pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in 40 CFR 60.482-9. The first attempt at repair shall be made no later than 5 calendar days after each leak is detected. First attempts at repair include, but are not limited to, the best practices described under 40 CFR 60.482-7(e). [40 CFR 60.482-8(c) and (d)] Federally Enforceable Through Title V Permit
114. For closed vent systems and control devices, vapor recovery systems shall be designed and operated to recover the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, whichever is less stringent. [40 CFR 60.482-10(b)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

115. For closed vent systems and control devices, enclosed combustion devices shall be designed and operated to reduce the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, on a dry basis, corrected to 3 percent oxygen, whichever is less stringent or to provide a minimum residence time of 0.75 seconds at a minimum temperature of 816 degrees C. [40 CFR 60.482-10(c)] Federally Enforceable Through Title V Permit
116. Flares used to comply with Subpart GGG shall comply with the requirements of 40 CFR 60.18. [40 CFR 60.482-10(d)] Federally Enforceable Through Title V Permit
117. Owners or operators of control devices used to comply with the provisions of Subpart GGG shall monitor these control devices to ensure that they are operated and maintained in conformance with their designs. [40 CFR 60.482-10(e)] Federally Enforceable Through Title V Permit
118. Except as provided in 40 CFR 60.482-10(i) through (k), each closed vent system used to comply with the provisions of Subpart GGG shall be inspected according to the procedures and schedule specified in 40 CFR 60.482-10(f)(1) and (f)(2). Leaks, as indicated by an instrument reading greater than 500 parts per million by volume above background or by visual inspections, shall be repaired as soon as practicable except as provided in 40 CFR 60.482-10(h). A first attempt at repair shall be made no later than 5 calendar days after the leak is detected. Repair shall be completed no later than 15 calendar days after the leak is detected. [40 CFR 60.482-10(f) and (g)] Federally Enforceable Through Title V Permit
119. Delay of repair of a closed vent system for which leaks have been detected is allowed if the repair is technically infeasible without a process unit shutdown or if the owner or operator determines that emissions resulting from immediate repair would be greater than the fugitive emissions likely to result from delay of repair. Repair of such equipment shall be complete by the end of the next process unit shutdown. [40 CFR 60.482-10(h)] Federally Enforceable Through Title V Permit
120. If a vapor collection system or closed vent system is operated under a vacuum, it is exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2). [40 CFR 60.482-10(i)] Federally Enforceable Through Title V Permit
121. Any parts of the closed vent system that are designated, as described in 40 CFR 60.482-10(l)(1), as unsafe to inspect are exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2) if they comply with the requirements specified in 40 CFR 60.482-10 (j)(1) and (j)(2). [40 CFR 60.482-10(j)] Federally Enforceable Through Title V Permit
122. Any parts of the closed vent system that are designated, as described in 40 CFR 60.482-10(l)(2), as difficult to inspect are exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2) if they comply with the requirements specified in 40 CFR 60.482-10(k)(1) through (k)(3). [40 CFR 60.482-10(k)] Federally Enforceable Through Title V Permit
123. The owner or operator shall record the following information: 1) Identification of all parts of the closed vent system that are designated as unsafe to inspect, an explanation of why the equipment is unsafe to inspect, and the plan for inspecting the equipment; 2) Identification of all parts of the closed vent system that are designated as difficult to inspect, an explanation of why the equipment is difficult to inspect, and the plan for inspecting the equipment; 3) For each inspection during which a leak is detected, a record of the information specified in 40 CFR 60.486(c); 4) For each inspection conducted in accordance with 40 CFR 60.485(b) during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected; and 5) For each visual inspection conducted in accordance with 40 CFR 60.482-10(f)(1)(ii) during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected. [40 CFR 60.482-10(l)] Federally Enforceable Through Title V Permit
124. Closed vent systems and control devices used to comply with provisions Subpart GGG shall be operated at all times when emissions may be vented to them. [40 CFR 60.482-10(m)] Federally Enforceable Through Title V Permit
125. In conducting the performance tests required in 40 CFR 60.8, the owner or operator shall use as reference methods and procedures the test methods in 40 CFR 60, Appendix A or other methods and procedures as specified in 40 CFR 60.485, except as provided in 40 CFR 60.8(b). [40 CFR 60.485(a)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

126. The owner or operator shall determine compliance with the standards in 40 CFR 60.482, 60.483, and 60.484 as follows: Method 21 shall be used to determine the presence of leaking sources. The instrument shall be calibrated before use each day of its use by the procedures specified in Method 21. The following calibration gases shall be used: (i) Zero air (less than 10 ppm of hydrocarbon in air); and (ii) A mixture of methane or n-hexane and air at a concentration of about, but less than, 10,000 ppm methane or n-hexane. [40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
127. The owner or operator shall determine compliance with the no detectable emission standards in 40 CFR 60.482-2(e), 60.482-3(i), 60.482-4, 60.482-7(f), and 60.482-10(e) as follows: 1) The requirements of 40 CFR 60.485(b) shall apply; 2) Method 21 shall be used to determine the background level. All potential leak interfaces shall be traversed as close to the interface as possible. The arithmetic difference between the maximum concentration indicated by the instrument and the background level is compared with 500 ppm for determining compliance. [40 CFR 60.485(c)] Federally Enforceable Through Title V Permit
128. The owner or operator shall test each piece of equipment unless demonstrated that a process unit is not in VOC service, i.e., that the VOC content would never be reasonably expected to exceed 10 percent by weight. For purposes of this demonstration, the following methods and procedures shall be used: 1) Procedures that conform to the general methods in ASTM E260-73, 91, or 96, E168-67, 77, or 92, E169-63, 77, or 93 (incorporated by reference as seen in 40 CFR 60.17) shall be used to determine the percent VOC content in the process fluid that is contained in or contacts a piece of equipment; 2) Organic compounds that are considered by the Administrator to have negligible photochemical reactivity may be excluded from the total quantity of organic compounds in determining the VOC content of the process fluid; and 3) Engineering judgment may be used to estimate the VOC content, if a piece of equipment had not been shown previously to be in service. If the Administrator disagrees with the judgment, the previous two procedures as specified in 40 CFR 60.485(d)(1) and (2) shall be used to resolve the disagreement. [40 CFR 60.485(d)] Federally Enforceable Through Title V Permit
129. The owner or operator shall demonstrate that an equipment is in light liquid service by showing that all the following conditions apply: 1) The vapor pressure of one or more of the components is greater than 0.3 kPa at 20 °C (1.2 in. H<sub>2</sub>O at 68 degrees F). Standard reference texts or ASTM D2879-83, 96, or 97 (incorporated by reference as seen in 40 CFR 60.17) shall be used to determine the vapor pressures; 2) The total concentration of the pure components having a vapor pressure greater than 0.3 kPa at 20 degrees Celsius is equal to or greater than 20 percent by weight; and 3) The fluid is a liquid at operating conditions. [40 CFR 60.485(e)] Federally Enforceable Through Title V Permit
130. Samples used in conjunction with 40 CFR 60.485(d), (e), and (g) shall be representative of the process fluid that is contained in or contacts the equipment or the gas being combusted in the flare. [40 CFR 60.485(f)] Federally Enforceable Through Title V Permit
131. The owner or operator shall determine compliance with the standards of flares as specified in 40 CFR 60.485(g)(1), (2), (3), (4), (5), (6), and (7). [40 CFR 60.485(g)] Federally Enforceable Through Title V Permit
132. An owner or operator of more than one affected facility subject to the provisions Subpart GGG may comply with the recordkeeping requirements for these facilities in one recordkeeping system if the system identifies each record by each facility. [40 CFR 60.486(a)] Federally Enforceable Through Title V Permit
133. When each leak is detected as specified in 40 CFR 60.482-2, 60.482-3, 60.482-7, 60.482-8, and 60.483-2, the following requirements apply: 1) A weatherproof and readily visible identification, marked with the equipment identification number, shall be attached to the leaking equipment; 2) The identification on a valve may be removed after it has been monitored for 2 successive months as specified in 40 CFR 60.482-7(c) and no leak has been detected during those 2 months; and 3) The identification on equipment except on a valve, may be removed after it has been repaired. [40 CFR 60.486(b)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

134. When each leak is detected as specified in 40 CFR 60.482-2, 60.482-3, 60.482-7, 60.482-8, and 60.483-2, the following information shall be recorded in a log and shall be kept for 5 years in a readily accessible location: 1) The instrument and operator identification numbers and the equipment identification number; 2) The date the leak was detected and the dates of each attempt to repair the leak; 3) Repair methods applied in each attempt to repair the leak; 4) "Above 10,000" if the maximum instrument reading measured by the methods specified in 40 CFR 60.485(a) after each repair attempt is equal to or greater than 10,000 ppm; 5) "Repair delayed" and the reason for the delay if a leak is not repaired within 15 calendar days after discovery of the leak; 6) The signature of the owner or operator (or designate) whose decision it was that repair could not be effected without a process shutdown; 7) The expected date of successful repair of the leak if a leak is not repaired within 15 days; 8) Dates of process unit shutdown that occur while the equipment is unrepaired; and 9) The date of successful repair of the leak. [40 CFR 60.486(c) and District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
135. The following information pertaining to the design requirements for closed vent systems and control devices described in 40 CFR 60.482-10 shall be recorded and kept in a readily accessible location: 1) Detailed schematics, design specifications, and piping and instrumentation diagrams; 2) The dates and descriptions of any changes in the design specifications; 3) A description of the parameter or parameters monitored, as required in 40 CFR 60.482-10(e), to ensure that control devices are operated and maintained in conformance with their design and an explanation of why that parameter (or parameters) was selected for the monitoring; 4) Periods when the closed vent systems and control devices required in 40 CFR 60.482-2, 60.482-3, 60.482-4, and 60.482-5 are not operated as designed, including periods when a flare pilot light does not have a flame; and 5) Dates of startups and shutdowns of the closed vent systems and control devices required in 40 CFR 60.482-2, 60.482-3, 60.482-4, and 60.482-5. [40 CFR 60.486(d)] Federally Enforceable Through Title V Permit
136. The following information pertaining to all equipment subject to the requirements in 40 CFR 60.482-1 to 60.482-10 shall be recorded in a log that is kept in a readily accessible location: 1) A list of identification numbers for equipment subject to the requirements of Subpart GGG; 2) (i) A list of identification numbers for equipment that are designated for no detectable emissions under the provisions of 40 CFR 60.482-2(e), 60.482-3(i) and 60.482-7(f). (ii) The designation of equipment as subject to the requirements of 40 CFR 60.482-2(e), 60.482-3(i) and 60.482-7(f) shall be signed by the owner or operator; 3) A list of equipment identification numbers for pressure relief devices required to comply with §60.482-4; 4) (i) The dates of each compliance test as required in 40 CFR 60.482-2(e), 60.482-3(i), §60.482-4, and 60.482-7(f). (ii) The background level measured during each compliance test. (iii) The maximum instrument reading measured at the equipment during each compliance test; and 5) A list of identification numbers for equipment in vacuum service. [40 CFR 60.486(e)] Federally Enforceable Through Title V Permit
137. The following information pertaining to all valves subject to the requirements of 40 CFR 60.482-7(g) and (h) and to all pumps subject to the requirements of 40 CFR 60.482-2(g) shall be recorded in a log that is kept in a readily accessible location: 1) A list of identification numbers for valves and pumps that are designated as unsafe-to-monitor, an explanation for each valve or pump stating why the valve or pump is unsafe-to-monitor, and the plan for monitoring each valve or pump; and 2) A list of identification numbers for valves that are designated as difficult-to-monitor, an explanation for each valve stating why the valve is difficult-to-monitor, and the schedule for monitoring each valve. [40 CFR 60.486(f)] Federally Enforceable Through Title V Permit
138. The following information shall be recorded for valves complying with 40 CFR 60.483-2: 1) A schedule of monitoring; 2) The percent of valves found leaking during each monitoring period. [40 CFR 60.486(g)] Federally Enforceable Through Title V Permit
139. The following information shall be recorded in a log that is kept in a readily accessible location: 1) Design criterion required in 40 CFR 60.482-2(d)(5) and 60.482-3(e)(2) and explanation of the design criterion; and 2) Any changes to this criterion and the reasons for the changes. [40 CFR 60.486(h)] Federally Enforceable Through Title V Permit
140. The following information shall be recorded in a log that is kept in a readily accessible location for use in determining exemptions as provided in 40 CFR 60.480(d): 1) An analysis demonstrating the design capacity of the affected facility; 2) A statement listing the feed or raw materials and products from the affected facilities and an analysis demonstrating whether these chemicals are heavy liquids or beverage alcohol; and 3) An analysis demonstrating that equipment is not in VOC service. [40 CFR 60.486(i)] Federally Enforceable Through Title V Permit
141. Information and data used to demonstrate that a piece of equipment is not in VOC service shall be recorded in a log that is kept in a readily accessible location. [40 CFR 60.486(j)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

142. The provisions of 40 CFR 60.7 (b) and (d) do not apply to affected facilities subject to Subpart GGG. [District 40 CFR 60.486(k)] Federally Enforceable Through Title V Permit
143. All semiannual reports to the Administrator shall include the following information, summarized from the information in 40 CFR 60.486: 1) Process unit identification; 2) For each month during the semiannual reporting period, i) Number of valves for which leaks were detected as described in 40 CFR 60.482-7(b) or 40 CFR 60.483-2, (ii) Number of valves for which leaks were not repaired as required in 40 CFR 60.482-7(d)(1), (iii) Number of pumps for which leaks were detected as described in 40 CFR 60.482-2(b) and (d)(6)(i), (iv) Number of pumps for which leaks were not repaired as required in 40 CFR 60.482-2(c)(1) and (d)(6)(ii), (v) Number of compressors for which leaks were detected as described in 40 CFR 60.482-3(f), (vi) Number of compressors for which leaks were not repaired as required in 40 CFR 60.482-3(g)(1), and (vii) The facts that explain each delay of repair and, where appropriate, why a process unit shutdown was technically infeasible; 3) Dates of process unit shutdowns which occurred within the semiannual reporting period; 4) Revisions to items reported in the semiannual report if changes have occurred since the initial report, as required in 40 CFR 60.487 (a) and (b), or subsequent revisions to the initial report. [40 CFR 60.487(c)] Federally Enforceable Through Title V Permit
144. An owner or operator electing to comply with the provisions of 40 CFR 60.483-1 and 60.483-2 shall notify the Administrator of the alternative standard selected 90 days before implementing either of the provisions. [40 CFR 60.487(d)] Federally Enforceable Through Title V Permit
145. An owner or operator shall report the results of all performance tests in accordance with 40 CFR 60.8 of the General Provisions. The provisions of 40 CFR 60.8(d) do not apply to affected facilities subject to the provisions of Subpart GGG except that an owner or operator must notify the Administrator of the schedule for the initial performance tests at least 30 days before the initial performance tests. [40 CFR 60.487(e)] Federally Enforceable Through Title V Permit
146. The semiannual reporting requirements of 40 CFR 60.487(a), (b), and (c) remain in force until and unless EPA, in delegating enforcement authority to a State under section 111(c) of the Act, approves reporting requirements or an alternative means of compliance surveillance adopted by such State. In that event, affected sources within the State will be relieved of the obligation to comply with the requirements of 40 CFR 60.487(a), (b), and (c), provided that they comply with the requirements established by the State. [40 CFR 60.487(f)] Federally Enforceable Through Title V Permit
147. Compressors are exempt from the standards of Subpart GGG if the owner or operator demonstrates that a compressor is in hydrogen service. Each compressor is presumed not to be in hydrogen service unless an owner or operator demonstrates that the piece of equipment is in hydrogen service. For a piece of equipment to be considered in hydrogen service, it must be determined that the percent hydrogen content can be reasonably expected always to exceed 50 percent by volume. For purposes of determining the percent hydrogen content in the process fluid that is contained in or contacts a compressor, procedures that conform to the general method described in ASTM E-260, E-168, or E-169 shall be used. An owner or operator may use engineering judgment demonstrate that the percent content exceeds 50 percent by volume, provided the engineering judgment demonstrates that the content clearly exceeds 50 percent by volume. When an owner or operator and the Administrator do not agree on whether a piece of equipment is in hydrogen service, however, the procedures that conform to the general method described in ASTM E-260, E-168, or E-169 shall be used to resolve the disagreement. If an owner or operator determines that a piece of equipment is in hydrogen service, the determination can be revised only after following the procedures that conform to the general method described in ASTM E-260, E-168, or E-169. [40 CFR 60.593(b)] Federally Enforceable Through Title V Permit
148. Any existing reciprocating compressor that becomes an affected facility under provisions of 40 CFR 60.14 or 40 CFR 60.15 is exempt from 40 CFR 60.482-3 (a), (b), (c), (d), (e), and (h) provided the owner or operator demonstrates that recasting the distance piece or replacing the compressor are the only options available to bring the compressor into compliance with the provisions of 40 CFR 60.482-3 (a), (b), (c), (d), (e), and (h). [40 CFR 60.593(c)] Federally Enforceable Through Title V Permit
149. An owner or operator may use the following provision in addition to 40 CFR 60.485(e): Equipment is in light liquid service if the percent evaporated is greater than 10 percent at 150 °C as determined by ASTM Method D86-78, 82, 90, 95, or 96. [40 CFR 60.593(d)] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

150. Pumps in light liquid service and valves in gas/vapor and light liquid service within a process compounds of usually high molecular weight that consist of many repeated links, each link being a relatively light and simple molecule. [40 CFR 60.593(e)] Federally Enforceable Through Title V Permit
151. Equipment that is in vacuum service is excluded from the requirements of 40 CFR 60.482-2 to 40 CFR 60.482-10 if it is identified as required in 40 CFR 60.486(e)(5). [40 CFR 60.482-1(d)] Federally Enforceable Through Title V Permit
152. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
153. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
154. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
155. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
156. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
157. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
158. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
159. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
160. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
161. Compliance with permit conditions in the Title V permit shall be deemed compliance with 40 CFR 60 Subpart GGG. A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit



# AUTHORITY TO CONSTRUCT

**PERMIT NO:** S-33-59-13

**ISSUANCE DATE:** 05/17/2007

**LEGAL OWNER OR OPERATOR:** BIG WEST OF CA, LLC  
**MAILING ADDRESS:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**LOCATION:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 42 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H6 - AREA 2: LIMIT TO 9 BILLION BTU/YEAR AND INCLUDE TUNING REQUIREMENTS FOR RULE 4306 COMPLIANCE

## CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
3. Emission rates shall not exceed any of the following limits: PM10: 0.001 lb/MMBtu, SOx (as SO2): 0.214 lb/MMBtu, NOx (as NO2): 0.130 lb/MMBtu, VOC: 0.003 lb/MMBtu and CO: 47 ppmv @ 3% O2 or 0.0347 lb/MMBtu. [District NSR Rule and Rules 4305 and 4306] Federally Enforceable Through Title V Permit
4. Boiler shall operate as a replacement/emergency standby unit for the following primary units: boiler 81-H9 (S-33-348), boiler 81-H1 (S-33-17), heaters 9H1-4 (S-33-12), heaters 22H11-14 (S-33-53), and/or heater 20H11 (S-33-55). Simultaneous operation of the replacement/emergency standby unit and a primary unit shall not occur except for startup and shutdown of the primary unit. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
5. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of natural gas combusted in the unit shall be installed, utilized and maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO



DAVID WARNER, Director of Permit Services

S-33-59-13 : Jul 7 2010 11:13AM -- TOMS : Joint Inspection NOT Required

6. Maximum annual heat input of the boiler shall not exceed 9 billion Btu per calendar year. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
7. Owner/operator shall have unit tuned at least twice each calendar year, from four to eight months apart, in which it operates, by a technician that is qualified, to the satisfaction of the APCO, in accordance with the procedure described in Rule 4304 (Equipment Tuning Procedure for Boilers, Steam Generators, and Process Heaters). [District Rule 4306] Federally Enforceable Through Title V Permit
8. If the unit does not operate throughout a continuous six-month period within a calendar year, only one tune-up is required for that calendar year. No tune-up is required for any unit that is not operated during that calendar year; this unit may be test fired to verify availability of the unit for its intended use, but once the test firing is completed the unit shall be shutdown. [District Rule 4306] Federally Enforceable Through Title V Permit
9. The permittee shall monitor, at least on a monthly basis, the amount of water use, steam production and other operational characteristics recommended by the unit manufacturer. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
10. Records of tune-up and monitoring of the operational characteristics of the unit shall be maintained. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
11. Records of monthly and annual heat input of the unit shall be maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
12. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
13. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
14. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
15. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
16. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
17. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
18. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
19. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
20. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

21. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
22. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
23. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
24. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
25. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
26. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
27. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
28. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1 wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
29. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
30. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit
31. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
32. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

33. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
34. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
35. A component shall be considered leaking if one or more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit
36. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
37. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit
38. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
39. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
40. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
41. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit
42. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

43. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455; 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
44. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
45. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit
46. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit
47. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
48. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
49. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
50. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit
51. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

52. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit
53. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit
54. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
55. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
56. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
57. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
58. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit
59. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
60. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
61. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

62. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit
63. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit
64. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
65. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
66. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit



## AUTHORITY TO CONSTRUCT

**PERMIT NO:** S-33-61-13

**ISSUANCE DATE:** 05/17/2007

**LEGAL OWNER OR OPERATOR:** BIG WEST OF CA, LLC  
**MAILING ADDRESS:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**LOCATION:** 6451 ROSEDALE HWY (AREA 1 & 2)  
BAKERSFIELD, CA 93308

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

MODIFICATION OF 78.8 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H8 - AREA 2: LIMIT TO 9 BILLION BTU/YEAR AND INCLUDE TUNING REQUIREMENTS FOR RULE 4306 COMPLIANCE

### CONDITIONS

1. The facility shall submit an application to modify the Title V permit in accordance with the timeframes and procedures of District Rule 2520. [District Rule 2520] Federally Enforceable Through Title V Permit
2. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
3. Emission rates shall not exceed any of the following limits: PM10: 0.001 lb/MMBtu, SOx (as SO2): 0.214 lb/MMBtu, NOx (as NO2): 0.130 lb/MMBtu, VOC: 0.003 lb/MMBtu and CO: 47 ppmv @ 3% O2 or 0.0347 lb/MMBtu. [District NSR Rule and Rules 4305 and 4306] Federally Enforceable Through Title V Permit
4. Boiler shall operate as a replacement/emergency standby unit for the following primary units: boiler 81-H9 (S-33-348), boiler 81-H1 (S-33-17), heaters 9H1-4 (S-33-12), heaters 22H11-14 (S-33-53), and/or heater 20H11 (S-33-55). Simultaneous operation of the replacement/emergency standby unit and a primary unit shall not occur except for startup and shutdown of the primary unit. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
5. A non-resettable, totalizing mass or volumetric fuel flow meter to measure the amount of natural gas combusted in the unit shall be installed, utilized and maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

**YOU MUST NOTIFY THE DISTRICT COMPLIANCE DIVISION AT (661) 392-5500 WHEN CONSTRUCTION IS COMPLETED AND PRIOR TO OPERATING THE EQUIPMENT OR MODIFICATIONS AUTHORIZED BY THIS AUTHORITY TO CONSTRUCT.** This is NOT a PERMIT TO OPERATE. Approval or denial of a PERMIT TO OPERATE will be made after an inspection to verify that the equipment has been constructed in accordance with the approved plans, specifications and conditions of this Authority to Construct, and to determine if the equipment can be operated in compliance with all Rules and Regulations of the San Joaquin Valley Unified Air Pollution Control District. Unless construction has commenced pursuant to Rule 2050, this Authority to Construct shall expire and application shall be cancelled two years from the date of issuance. The applicant is responsible for complying with all laws, ordinances and regulations of all other governmental agencies which may pertain to the above equipment.

Seyed Sadredin, Executive Director / APCO



DAVID WARNER, Director of Permit Services

S-33-61-13; Jul 7 2010 11:14AM -- TOMS : Joint Inspection NOT Required

6. Maximum annual heat input of the boiler shall not exceed 9 billion Btu per calendar year. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
7. Owner/operator shall have unit tuned at least twice each calendar year, from four to eight months apart, in which it operates, by a technician that is qualified, to the satisfaction of the APCO, in accordance with the procedure described in Rule 4304 (Equipment Tuning Procedure for Boilers, Steam Generators, and Process Heaters). [District Rule 4306] Federally Enforceable Through Title V Permit
8. If the unit does not operate throughout a continuous six-month period within a calendar year, only one tune-up is required for that calendar year. No tune-up is required for any unit that is not operated during that calendar year; this unit may be test fired to verify availability of the unit for its intended use, but once the test firing is completed the unit shall be shutdown. [District Rule 4306] Federally Enforceable Through Title V Permit
9. The permittee shall monitor, at least on a monthly basis, the amount of water use, steam production and other operational characteristics recommended by the unit manufacturer. Monitoring shall not be required if the unit is not in operation, i.e. the unit need not be started solely to perform monitoring. Monitoring shall be performed within 5 days of restarting the unit unless monitoring has been performed within the last month. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
10. Records of tune-up and monitoring of the operational characteristics of the unit shall be maintained. [District Rules 4305 and 4306] Federally Enforceable Through Title V Permit
11. Records of monthly and annual heat input of the unit shall be maintained. [District Rules 2201, 4305, and 4306] Federally Enforceable Through Title V Permit
12. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
13. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
14. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
15. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
16. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
17. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
18. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
19. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
20. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

21. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
22. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
23. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
24. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
25. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
26. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
27. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
28. Except for complying with the applicable requirements of Sections 6.1 and 7.3, the requirements of this rule shall not apply to 1) components subject to Rule 4623 (adopted 5/19/05), 2) pressure relief devices, pumps, and compressors equipped with a closed vent system as defined in Section 3.0, 3) components buried below ground, 4) components exclusively handling liquid streams which have less than 10 percent by weight (<10 wt%) evaporation at 150 C, 5) components exclusively handling liquid streams with a VOC content less than ten percent by weight (<10 wt%), 6) components exclusively handling gas/vapor streams with a VOC content of less than one percent by weight (<1 wt%), 7) components incorporated in lines exclusively in vacuum service, 8) components exclusively handling commercial natural gas, and 9) one-half inch nominal or less stainless steel tube fittings which have been demonstrated to the Air Pollution Control Officer (APCO) to be leak-free based on initial inspection. [District Rule 4455, 4.1 & 4.2] Federally Enforceable Through Title V Permit
29. The operator shall not use any component that leaks in excess of the allowable leak standards of this rule, or is found to be in violation of the provisions specified in Section 5.1.3. A component identified as leaking in excess of an allowable leak standard may be used provided it has been identified with a tag for repair, has been repaired, or is awaiting re-inspection after repair, within the applicable time period specified within the rule. [District Rule 4455, 5.1.1] Federally Enforceable Through Title V Permit
30. Each hatch shall be closed at all times except during sampling or adding of process material through the hatch, or during attended repair, replacement, or maintenance operations, provided such activities are done as expeditiously as possible and with minimal spillage of material and VOC emissions to the atmosphere. [District Rule 4455, 5.1.2] Federally Enforceable Through Title V Permit
31. The operator shall be in violation of this rule if any District inspection demonstrates that one or more of the conditions in Sections 5.1.4 exist at the facility. [District Rule 4455, 5.1.3.1] Federally Enforceable Through Title V Permit
32. Except for annual operator inspection described in Section 5.1.3.2.3, any operator inspection that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall not constitute a violation of this rule if the leaking components are repaired as soon as practicable but not later than the time frame specified in this rule. Such components shall not be counted towards determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.1] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

33. Leaking components detected during operator inspection pursuant Section 5.1.3.2.1 that are not repaired, replaced, or removed from operation as soon as practicable but not later than the time frame specified in this rule shall be counted toward determination of compliance with the provisions of Section 5.1.4. [District Rule 4455, 5.1.3.2.2] Federally Enforceable Through Title V Permit
34. Any operator inspection conducted annually for a component type (including operator annual inspections pursuant to Section 5.2.5, 5.2.6, 5.2.7, or 5.2.8) that demonstrates one or more of the conditions in Section 5.1.4 exist at the facility shall constitute a violation of this rule regardless of whether or not the leaking components are repaired, replaced, or removed from operation within the allowable repair time frame specified in this rule. [District Rule 4455, 5.1.3.2.3] Federally Enforceable Through Title V Permit
35. A component shall be considered leaking if one of more of the conditions specified in Sections 5.1.4.1 through 5.1.4.4 of the rule exist at the facility. [District Rule 4455, 5.1.4] Federally Enforceable Through Title V Permit
36. The operator shall audio-visually inspect for leaks all accessible operating pumps, compressors and PRD in service at least once every 24 hours, except when operators do not report to the facility for that given 24 hours. Any identified leak that cannot be immediately repaired shall be reinspected within 24 hours using EPA Method 21. If a leak is found, it shall be repaired as soon as practical but not later than the time frame specified in Table 3 of the rule. [District Rule 4455, 5.2.1 & 5.2.2; 40 CFR 60.482-2(a), (b) and (c); 40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
37. The operator shall inspect all components at least once every calendar quarter, except for inaccessible components, unsafe-to-monitor components and pipes. Inaccessible components, unsafe-to-monitor components and pipes shall be inspected in accordance with the requirements set forth in Sections 5.2.5, 5.2.6, and 5.2.7. New, replaced, or repaired fittings, flanges and threaded connections shall be inspected immediately after being placed into service. [District Rule 4455, 5.2.3, 5.2.4, 5.2.5, 5.2.6 & 5.2.7; 40 CFR 60.482-2(a), (b) and (g); 40 CFR 60.482-7(a), (b), (g) and (h)] Federally Enforceable Through Title V Permit
38. The operator may apply for a written approval from the APCO to change the inspection frequency from quarterly to annually for a component type, provided the operator meets all the criteria specified in Sections 5.2.8.1 through 5.2.8.3 of the rule. This approval shall apply to accessible component types, specifically designated by the APCO, except pumps, compressors, and PRDs which shall continue to be inspected on a quarterly basis. [District Rule 4455, 5.2.8; 40 CFR 60.482-7] Federally Enforceable Through Title V Permit
39. An annual inspection frequency approved by the APCO shall revert to quarterly inspection frequency for a component type if either the operator inspection or District inspection demonstrates that a violation of the provisions of Sections 5.1, 5.2 and 5.3 of the rule exists for that component type, or the APCO issued a Notice of Violation for violating any of the provisions of this rule during the annual inspection period for that component type. When the inspection frequency changes from annual to quarterly inspections, the operator shall notify the APCO in writing within five (5) calendar days after changing the inspection frequency, giving the reason(s) and date of change to quarterly inspection frequency. [District Rule 4455, 5.2.9 & 5.2.10] Federally Enforceable Through Title V Permit
40. The operator shall initially inspect a process PRD that releases to the atmosphere as soon as practicable but not later than 24 hours after the time of the release. To insure that the process PRD is operating properly, and is leak-free, the operator shall re-inspect the process PRD not earlier than 24 hours after the initial inspection but not later than 15 calendar days after the date of the release using EPA Method 21. If the process PRD is found to be leaking at either inspection, the PRD leak shall be treated as if the leak was found during quarterly operator inspections. [District Rule 4455, 5.2.11 and 40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
41. Except for process PRD, a component shall be inspected within 15 calendar days after repairing the leak or replacing the component using EPA Method 21. [District Rule 4455, 5.2.12] Federally Enforceable Through Title V Permit
42. A District inspection in no way fulfills any of the mandatory inspection requirements that are placed upon operators and cannot be used or counted as an inspection required of an operator. Any attempt by an operator to count such District inspections as part of the mandatory operator's inspections is considered to be willful circumvention and is a violation of this rule. [District Rule 4455, 5.2.13] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

43. Upon detection of a leaking component, the operator shall affix to that component a weatherproof readily visible tag that contains the information specified in Section 5.3.3. The tag shall remain affixed to the component until the leaking component has been repaired or replaced; has been re-inspected; and is found to be in compliance with the requirements of this rule. [District Rule 4455, 5.3.1, 5.3.2 & 5.3.3; 40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
44. An operator shall minimize all component leaks immediately to the extent possible, but not later than one (1) hour after detection of leaks in order to stop or reduce leakage to the atmosphere. [District Rule 4455, 5.3.4] Federally Enforceable Through Title V Permit
45. If the leak has been minimized but the leak still exceeds the applicable leak standards of this rule, an operator shall repair or replace the leaking component, vent the leaking component to a closed vent system, or remove the leaking component from operation as soon as practicable but not later than the time period specified in Table 3. For each calendar quarter, the operator may be allowed to extend the repair period as specified in Table 3, for a total number of leaking components, not to exceed 0.05 percent of the number of components inspected, by type, rounded upward to the nearest integer where required. [District Rule 4455, 5.3.5] Federally Enforceable Through Title V Permit
46. If the leaking component is an essential component or a critical component and which cannot be immediately shut down for repairs, the operator shall minimize the leak within one hour after detection of the leak. If the leak has been minimized, but the leak still exceeds any of the applicable leak standards of this rule, the essential component or critical component shall be repaired or replaced to eliminate the leak during the next process unit turnaround, but in no case later than one year from the date of the original leak detection, whichever comes earlier. [District Rule 4455, 5.3.6] Federally Enforceable Through Title V Permit
47. For any component that has incurred five repair actions for major gas leaks or major liquid leaks, or any combination of major gas leaks and major liquid leaks within a continuous 12-month period, the operator shall comply with at least one of the requirements specified in Sections 5.3.7.1, 5.3.7.2, 5.3.7.3, or 5.3.7.4 by the applicable deadlines specified in Sections 5.3.7.5 and 5.3.7.6. If the original leaking component is replaced with a new like-in-kind component before incurring five repair actions for major leaks within 12-consecutive months, the repair count shall start over for the new component. An entire compressor or pump need not be replaced provided the compressor part(s) or pump part(s) that have incurred five repair actions as described in Section 5.3.7 are brought into compliance with at least one of the requirements of Sections 5.3.7.1 through 5.3.7.6. [District Rule 4455, 5.3.7] Federally Enforceable Through Title V Permit
48. The operator shall monitor process PRD by using electronic process control instrumentation that allows for real time continuous parameter monitoring or by using telltale indicators for the process PRD where parameter monitoring is not feasible. [District Rule 4455, 5.4.1] Federally Enforceable Through Title V Permit
49. After a release from a process PRD in excess of 500 pounds of VOC in a continuous 24-hour period, the operator shall immediately conduct a failure analysis and implement corrective actions as soon as practicable but not later than 30 days to prevent the reoccurrence of similar release. For refineries processing greater than 20,000 barrels of crude oil per day, any subsequent release in excess of 500 pounds of VOC within a continuous 24-hour period shall be subject to the requirements of Section 5.4.5. [District Rule 4455, 5.4.3 & 5.4.4] Federally Enforceable Through Title V Permit
50. The operator of a refinery processing greater than 20,000 barrels of crude oil per day shall connect all process PRDs serving that process equipment to an APCO-approved closed vent system as defined in Section 3.0 if any of the conditions specified in Sections 5.4.5.1 and 5.4.5.2 occurs. Process PRDs subject to the provisions of Section 5.4.5 shall be connected to an APCO-approved closed-vent system as soon as practicable, but no later than the first turnaround after the requirement to connect becomes effective. [District Rule 4455, 5.4.5] Federally Enforceable Through Title V Permit
51. All major components and critical components shall be physically identified clearly and visibly for inspection, repair, and recordkeeping purposes. The physical identification shall consist of labels, tags, manufacturer's nameplate identifier, serial number, or model number, or other system approved by the APCO that enables an operator or District personnel to locate each individual component. The operator shall replace tags or labels that become missing or unreadable as soon as practicable but not later than 24 hours after discovery. The operator shall comply with the requirements of Sections 6.1.4 if there is any change in the description of major components or critical components. [District Rule 4455, 5.5.1 & 5.5.2] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

52. The operator shall keep a copy of the operator management plan at the facility and make it available to the APCO, ARB and US EPA upon request. By January 30 of each year, the operator shall submit to the APCO for approval, in writing, an annual report indicating any changes to the existing, approved operator management plan. [District Rule 4455, 6.1.2 & 6.1.4] Federally Enforceable Through Title V Permit
53. The operator shall maintain an inspection log containing, at a minimum, 1) total number of components inspected, and total number and percentage of leaking components found by component types, 2) location, type, name or description of each leaking component, and description of any unit where the leaking component is found, 3) date of leak detection and method of leak detection, 4) for gaseous leaks, record the leak concentration in ppmv, and for liquid leaks record whether the leak is a major liquid leak or a minor liquid leak, 5) date of repair, replacement, or removal from operation of leaking components, 6) identification and location of essential component and critical components found leaking that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 7) methods used to minimize the leak from essential components and critical components that cannot be repaired until the next process unit turnaround or not later one year after leak detection, whichever comes earlier, 8) after the component is repaired or is replaced, the date of reinspection and the leak concentration in ppmv, 9) inspector's name, business mailing address, and business telephone number, and 10) the facility operator responsible for the inspection and repair program shall sign and date the inspection log certifying the accuracy of the information recorded in the log. [District Rule 4455, 6.2.1; 40 CFR 60.486(c)] Federally Enforceable Through Title V Permit
54. Records of each calibration of the portable hydrocarbon detection instrument utilized for inspecting components, including a copy of current calibration gas certification from the vendor of said calibration gas cylinder, the date of calibration, concentration of calibration gas, analyzer reading of calibration gas before adjustment, instrument reading of calibration gas after adjustment, calibration gas expiration date, and calibration gas cylinder pressure at the time of calibration. [District Rule 4455, 6.2.3] Federally Enforceable Through Title V Permit
55. The operator shall notify the APCO, by telephone or other methods approved by the APCO, of any process PRD release described in Sections 5.4.4 and 5.4.5, and any release in excess of the reportable quantity limits as stipulated in 40 CFR, Part 117, Part 302 and Part 355, including any release in excess of 100 pounds of VOC, within one hour of such occurrence or within one hour of the time said person knew or reasonably should have known of its occurrence. [District Rule 4455, 6.3.1] Federally Enforceable Through Title V Permit
56. The operator shall submit a written report to the APCO within thirty (30) calendar days following a PRD release subject to 6.3.1. The written report shall include 1) process PRD type, size, and location, 2) date, time and duration of the process PRD release, 3) types of VOC released and individual amounts, in pounds, including supporting calculations, 4) cause of the process PRD release, and 5) corrective actions taken to prevent a subsequent process PRD release. [District Rule 4455 6.3.2] Federally Enforceable Through Title V Permit
57. Copies of all records shall be retained for a minimum of five (5) years after the date of an entry. Such records shall be made available to the APCO, ARB, or US EPA upon request. [District Rule 4455, 6.2.2, 6.2.3 & 6.2.4] Federally Enforceable Through Title V Permit
58. Equivalent test methods other than specified in Sections 6.4.1 through 6.4.5 may be used provided such test methods have received prior approval from the US EPA, ARB, and APCO. [District Rule 4455, 6.4] Federally Enforceable Through Title V Permit
59. Measurements of gaseous leak concentrations shall be conducted according to US EPA Method 21 using an appropriate portable hydrocarbon detection instrument calibrated with methane. The instrument shall be calibrated in accordance with the procedures specified in US EPA Method 21 or the manufacturer's instruction, as appropriate, not more than 30 days prior to its use. The operator shall record the calibration date of the instrument. [District Rule 4455, 6.4.1; 40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
60. The VOC content shall be determined using American Society of Testing and Materials (ASTM) D 1945 for gases and South Coast Air Quality Management District (SCAQMD) Method 304 for liquids. [District Rule 4455, 6.4.2] Federally Enforceable Through Title V Permit
61. The percent by volume liquid evaporated at 150 C shall be determined using ASTM D 86. [District Rule 4455, 6.4.3] Federally Enforceable Through Title V Permit

CONDITIONS CONTINUE ON NEXT PAGE

62. The control efficiency of any VOC control device, measured and calculated as carbon, shall be determined by US EPA Method 25, except when the outlet concentration must be below 50 ppm in order to meet the standard, in which case Method 25a may be used. US EPA Method 18 may be used in lieu of US EPA Method 25 or US EPA Method 25a provided the identity and approximate concentrations of the analytes/compounds in the sample gas stream are known before analysis with the gas chromatograph and the gas chromatograph is calibrated for each of those known analyte/compound to ensure that the VOC concentrations are neither under- or over-reported. [District Rule 4455, 6.4.4] Federally Enforceable Through Title V Permit
63. Halogenated exempt compounds shall be analyzed by US EPA Method 18 or ARB Method 422 "Determination of Volatile Organic Compounds in Emission from Stationary Sources". [District Rule 4455, 6.4.5] Federally Enforceable Through Title V Permit
64. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
65. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
66. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

# ATTACHMENT C

Emissions Increases

	SSIPE (lb/yr)				
	NOx	VOC	CO	SOx	PM10
S-33-49-5	0	0	0	0	0
S-33-52-12	0	0	0	0	0
S-33-59-13	0	0	0	0	0
S-33-61-13	0	0	0	0	0
<b>TOTAL</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>	<b>0</b>

# ATTACHMENT D

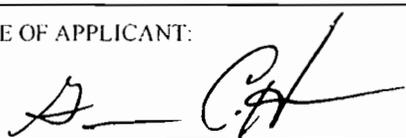
Application

# San Joaquin Valley Air Pollution Control District

www.valleyair.org

## Permit Application For:

ADMINISTRATIVE AMENDMENT     MINOR MODIFICATION     SIGNIFICANT MODIFICATION

1. PERMIT TO BE ISSUED TO: <u>Big West of California, LLC</u>	
2. MAILING ADDRESS: STREET/P.O. BOX: <u>6451 Rosedale Highway</u> CITY: <u>Bakersfield</u> STATE: <u>CA</u> 9-DIGIT ZIP CODE: <u>93308</u>	
3. LOCATION WHERE THE EQUIPMENT WILL BE OPERATED: STREET: <u>Same</u> CITY: _____ SECTION _____ TOWNSHIP _____ RANGE _____	INSTALLATION DATE: <u>Pending</u>
4. GENERAL NATURE OF BUSINESS: <u>Oil Refining</u>	
5. DESCRIPTION OF EQUIPMENT OR MODIFICATION FOR WHICH APPLICATION IS MADE (include Permit #'s if known, and use additional sheets if necessary)  <u>S-33-49. Modification of 161.4 mmbtu/hr crude unit #11. Designate heaters 11H11 and 11H12 as dormant emission units for Rule 4306 compliance.</u>	
6. TYPE OR PRINT NAME OF APPLICANT: <u>Gene Cotten</u>	TITLE OF APPLICANT: <u>Vice President Refining</u>
7. SIGNATURE OF APPLICANT: 	DATE: <u>05/24/2007</u> PHONE: ( ) FAX: ( ) EMAIL:

### For APCD Use Only:

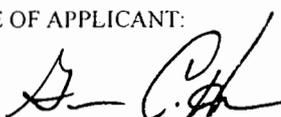
DATE STAMP	FILING FEE RECEIVED: \$ <u>60.00</u> CHECK#: <u>231637563</u>
	DATE PAID: <u>5/29/07</u> 
	PROJECT NO: <u>S-1072819</u> FACILITY ID: <u>S-33</u>

# San Joaquin Valley Air Pollution Control District

[www.valleyair.org](http://www.valleyair.org)

## Permit Application For:

ADMINISTRATIVE AMENDMENT   
  MINOR MODIFICATION   
  SIGNIFICANT MODIFICATION

1. PERMIT TO BE ISSUED TO: Big West of California, LLC	
2. MAILING ADDRESS:  STREET/P.O. BOX: <u>6451 Rosedale Highway</u>  CITY: <u>Bakersfield</u> STATE: <u>CA</u> 9-DIGIT ZIP CODE: <u>93308</u>	
3. LOCATION WHERE THE EQUIPMENT WILL BE OPERATED:  STREET: <u>Same</u> CITY: _____  _____% SECTION _____ TOWNSHIP _____ RANGE _____	INSTALLATION DATE:  Pending
4. GENERAL NATURE OF BUSINESS: Oil Refining	
5. DESCRIPTION OF EQUIPMENT OR MODIFICATION FOR WHICH APPLICATION IS MADE (include Permit #'s if known, and use additional sheets if necessary)  S-33-52. Modification of 86.8 mmbtu/hr catalytic reforming unit #26. Retrofit heaters 26H11A/B and 26H13/15 with low NOx burners and designate 26H12 and 26H17 as dormant emissions units for Rule 4306 compliance.	
6. TYPE OR PRINT NAME OF APPLICANT:  Gene Cotten	TITLE OF APPLICANT:  Vice President Refining
7. SIGNATURE OF APPLICANT:  	DATE: <u>05/24/2007</u>  PHONE: ( ) FAX: ( ) EMAIL:

**For APCD Use Only:**

DATE STAMP	FILING FEE RECEIVED: \$ _____ CHECK#: _____  DATE PAID: _____  PROJECT NO: _____ FACILITY ID: _____
------------	---

# San Joaquin Valley Air Pollution Control District

*www.valleyair.org*

## Permit Application For:

ADMINISTRATIVE AMENDMENT    
  MINOR MODIFICATION    
  SIGNIFICANT MODIFICATION

1. PERMIT TO BE ISSUED TO: <span style="float: right;">Big West of California, LLC</span>	
2. MAILING ADDRESS:  STREET/P.O. BOX: <u>6451 Rosedale Highway</u>  CITY: <u>Bakersfield</u> STATE: <u>CA</u> 9-DIGIT ZIP CODE: <u>93308</u>	
3. LOCATION WHERE THE EQUIPMENT WILL BE OPERATED:  STREET: <u>Same</u> CITY: _____  _____ ¼ SECTION _____ TOWNSHIP _____ RANGE _____	INSTALLATION DATE:  Pending
4. GENERAL NATURE OF BUSINESS: Oil Refining	
5. DESCRIPTION OF EQUIPMENT OR MODIFICATION FOR WHICH APPLICATION IS MADE (include Permit #'s if known, and use additional sheets if necessary)  S-33-59. Modification of 42 mmbtu/hr boiler 81H6 for Rule 4306 compliance.	
6. TYPE OR PRINT NAME OF APPLICANT:  Gene Cotten	TITLE OF APPLICANT:  Vice President Refining
7. SIGNATURE OF APPLICANT:  	DATE: <u>05/24/2007</u>  PHONE: ( ) _____ FAX: ( ) _____ EMAIL: _____

**For APCD Use Only:**

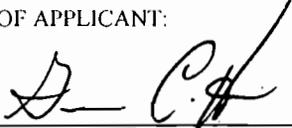
DATE STAMP	FILING FEE RECEIVED: \$ _____ CHECK#: _____  DATE PAID: _____  PROJECT NO: _____ FACILITY ID: _____
------------	---

# San Joaquin Valley Air Pollution Control District

www.valleyair.org

## Permit Application For:

ADMINISTRATIVE AMENDMENT     MINOR MODIFICATION     SIGNIFICANT MODIFICATION

1. PERMIT TO BE ISSUED TO: Big West of California, LLC	
2. MAILING ADDRESS: STREET/P.O. BOX: <u>6451 Rosedale Highway</u> CITY: <u>Bakersfield</u> STATE: <u>CA</u> 9-DIGIT ZIP CODE: <u>93308</u>	
3. LOCATION WHERE THE EQUIPMENT WILL BE OPERATED: STREET: <u>Same</u> CITY: _____ _____% SECTION _____ TOWNSHIP _____ RANGE _____	INSTALLATION DATE: Pending
4. GENERAL NATURE OF BUSINESS: Oil Refining	
5. DESCRIPTION OF EQUIPMENT OR MODIFICATION FOR WHICH APPLICATION IS MADE (include Permit #'s if known, and use additional sheets if necessary)  S-33-61. Modification of 78.8 mmbtu/hr boiler 81H8 for Rule 4306 compliance.	
6. TYPE OR PRINT NAME OF APPLICANT: Gene Cotten	TITLE OF APPLICANT: Vice President Refining
7. SIGNATURE OF APPLICANT: 	DATE: 05/24/2007 PHONE: ( ) FAX: ( ) EMAIL:

### For APCD Use Only:

DATE STAMP	FILING FEE RECEIVED: \$ _____ CHECK#: _____
	DATE PAID: _____
	PROJECT NO: _____ FACILITY ID: _____

RECEIVED

MAY 29 2007

Permits Srvc  
SJVAPCD

San Joaquin Valley  
Unified Air Pollution Control District

TITLE V MODIFICATION - COMPLIANCE CERTIFICATION FORM

I. TYPE OF PERMIT ACTION (Check appropriate box)

- SIGNIFICANT PERMIT MODIFICATION
- MINOR PERMIT MODIFICATION
- ADMINISTRATIVE AMENDMENT

COMPANY NAME: Big West of California, LLC	FACILITY ID: S-33
1. Type of Organization: <input checked="" type="checkbox"/> Corporation <input type="checkbox"/> Sole Ownership <input type="checkbox"/> Government <input type="checkbox"/> Partnership <input type="checkbox"/> Utility	
2. Owner's Name: Big West of California, LLC	
3. Agent to the Owner:	

II. COMPLIANCE CERTIFICATION (Read each statement carefully and initial all circles for confirmation):

- Based on information and belief formed after reasonable inquiry, the equipment identified in this application will continue to comply with the applicable federal requirement(s).
- Based on information and belief formed after reasonable inquiry, the equipment identified in this application will comply with applicable federal requirement(s) that will become effective during the permit term, on a timely basis.
- Corrected information will be provided to the District when I become aware that incorrect or incomplete information has been submitted.
- Based on information and belief formed after reasonable inquiry, information and statements in the submitted application package, including all accompanying reports, and required certifications are true accurate and complete.

I declare, under penalty of perjury under the laws of the state of California, that the forgoing is correct and true:

Gene Cotten  
 Signature of Responsible Official

5-24-07  
 Date

Gene Cotten

Name of Responsible Official (please print)

Vice President - Refining

Title of Responsible Official (please print)

# ATTACHMENT E

Previous Title V Operating Permit No.'s S-  
33-49-1, '52-11, '59-7, '61-7

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** S-33-49-1

**EXPIRATION DATE:** 08/31/2007

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

161.4 MM BTU/HR CRUDE UNIT #11 INCLUDING HEATERS 11-H11, 11-H12, AND 11-H13, AND TOPPING ASSEMBLY - AREA 2

## PERMIT UNIT REQUIREMENTS

---

1. Heaters 11-H11 and 11-H12 shall not be operated unless the owner or operator applies to modify the Title V permit to address the requirements of District Rule 2520, 9.0 for this permit unit. [District Rule 2520, 9.0] Federally Enforceable Through Title V Permit
2. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
3. Gas plant Heater 11-H13 is in service as part of hydro unit #27 S-33-349 as heater 27H-1. [District NSR Rule] Federally Enforceable Through Title V Permit
4. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
5. Spent caustics and waste liquids shall be disposed of in a manner preventing the creation of odors. [District Rule 4102] Federally Enforceable Through Title V Permit
6. Heat exchangers utilizing cooling water shall be maintained to prevent volatile organic compound emissions from cooling towers. [District NSR Rule] Federally Enforceable Through Title V Permit
7. Heaters 11-H11 and 11-H12 shall not be operated for any reason until necessary retrofits are made to comply with the applicable requirements of District Rules 4305 and 4351. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
8. No modifications to heaters 11-H11 and 11-H12 shall be performed without an Authority to Construct for that modification(s), except for changes specified in the condition below. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
9. The fuel supply line(s) shall be physically disconnected from heaters 11-H11 and 11-H12. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
10. Heaters 11-H11 and 11-H12 emission rates shall not exceed NO<sub>x</sub> (as NO<sub>2</sub>): 0.036 lb/MMBtu or 30 ppmv @ 3% O<sub>2</sub>, or CO: 400 ppmv @ 3% O<sub>2</sub>. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
11. A source test to demonstrate compliance with the indicated emission limits shall be performed within 60 days of recommencing operation of heaters 11-H11 or 11-H12. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
12. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

13. All required source testing shall conform to the compliance testing procedures described in District Rule 1081 (Last Amended December 19, 1993). [District Rule 1081, and Kern County Rule 108.1] Federally Enforceable Through Title V Permit
14. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
15. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. Compliance with this requirement may be demonstrated by testing the sulfur content of each fuel and determining the maximum hourly emissions of sulfur compounds by multiplying the sulfur content of each fuel in lb/MMBtu by the maximum heat input rating of the unit; or by source testing in combination with fuel analysis. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
16. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit and sulfur emission limits has been demonstrated for 8 consecutive weeks for a fuel source, then the fuel testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
17. When complying with SO<sub>x</sub> emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6B; or Method 8; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by GC-FPD/TCD performed in the laboratory and EPA Method 19 to calculate emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
18. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
19. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
20. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). To demonstrate compliance with this requirement the operator shall test the sulfur content of each fuel source and demonstrate the sulfur content does not exceed 3.3% by weight for gaseous fuels; or determine that the concentration of sulfur compounds in the exhaust does not exceed the concentration limit by a combination of source testing and fuel analysis. [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
21. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
22. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
23. Valves, threaded connections, and flanges shall not leak VOCs at a rate of more than three (3) drops per minute or leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking components of any component type does not exceed two (2) percent of the total number of components of that type. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

24. Pressure relief valves (PRVs) shall not leak VOCs in excess of 10,000 ppm above background when measured in the plane at the centroid of any atmospheric vent with an instrument calibrated with methane, provided the total number of leaking PRVs does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
25. Process drains shall not leak VOCs in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking process drains does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
26. The facility shall not use any valve, other than a valve on a product sampling line, a safety pressure relief valve, or a double block and bleeder valve, which is located at the end of a pipe or line containing VOCs unless such valve is sealed with a blind flange, plug, or cap; not including loading spouts and water drain valves. [District Rule 4451, 5.1.4] Federally Enforceable Through Title V Permit
27. Every leaking valve, flange, threaded connection, process drain and pressure relief valve shall be affixed with a record of inspection which shall bear a legible record of all inspections for at least a fifteen month period or coded with the records kept in a centralized location. [District Rule 4451, 5.1.5] Federally Enforceable Through Title V Permit
28. All valves, threaded connections and PRVs handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. If less than two (2) percent of the components of any component type, except PRVs, are found to leak during each five (5) consecutive quarterly inspections, the inspection frequency for that component type may be changed from quarterly to annual. If any annual inspection shows that two (2) percent or more of all of a specific component type subject to the prohibitions of this rule are leaking, then quarterly inspections of that component type shall be resumed. [District Rule 4451, 5.2.1] Federally Enforceable Through Title V Permit
29. All flanges and process drains handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every 12 months. [District Rule 4451, 5.2.2] Federally Enforceable Through Title V Permit
30. Within three (3) days after any pressure relief valve vents to the atmosphere, the operator shall inspect with a portable hydrogen detection instrument any such PRV and shall repair any leak. The inspection shall be accomplished by sampling for vapors with a portable hydrocarbon detection instrument and by visual examination for indication of liquid leakage. [District Rule 4451, 5.2.3 & 5.2.4] Federally Enforceable Through Title V Permit
31. Any leaking valve, PRV, threaded connection, flange and process drain shall be identified by affixing a weatherproof, readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until repair and reinspection documents compliance with the requirements of Rule 4451 (Amended December 17, 1992). [District Rule 4451, 5.2.5] Federally Enforceable Through Title V Permit
32. Each leak detected shall be recorded on the inspection record along with the date of inspection, component identification number, actual instrument reading, and the inspector's initials. [District Rule 4451, 5.2.6] Federally Enforceable Through Title V Permit
33. Within 15 days after detection any valve, pressure relief valve, flange, threaded connection, or process drain found to leak shall be repaired or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25. [District Rule 4451, 5.3.1] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

34. If a valve, pressure relief valve, flange, threaded connection, or process drain is found to leak and cannot be repaired to a no-leak condition without requiring the shutdown of essential refinery operations, the following repair schedule shall apply: (a) If the leak rate is less than ten (10) drops per minute the APCO shall be notified of the expected date of repair, not to exceed one (1) year or the date of the next process unit turnaround whichever is less for each valve, pressure relief valve, flange, threaded connection, and process drain, and the actual date of repair for each valve, pressure relief valve, flange, threaded connection, and process drain. (b) If the leak rate is greater than nine (9) drops per minute or 10,000 ppm measured one (1) centimeter from the source, the APCO shall be notified of an emergency repair, within 15 days after detection, to reduce the leak to less than ten (10) drops per minute or 10,000 ppm as methane measured one (1) centimeter from the source, or the venting, within 30 days after detection, of the emission to a flare or vapor control system that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25, or a demonstration, with 30 days after detection, that the repair schedules are infeasible. The demonstration shall include documentation that the component is an essential device and that no vapor control device that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25 exists. (c) Repair an essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4451, 5.3.2] Federally Enforceable Through Title V Permit
35. Analysis of halogenated exempt compounds shall be by ARB Method 422. [District Rule 4451, 6.3.1] Federally Enforceable Through Title V Permit
36. Efficiency of VOC destruction device shall be measured by EPA Method 25, 25a, or 25b, as applicable. [District Rule 4451, 6.3.2] Federally Enforceable Through Title V Permit
37. The TVP of organic liquids, including light crude and petroleum distillates, shall be measured using Reid vapor pressure ASTM Method No. D-323 modified by maintaining the hot water bath at storage temperature. Where storage temperature is above 1000F, TVP may be determined by Reid Vapor pressure at 1000F and ARB approved calculations. Organic liquids listed in Rule 4451 (Amended December 17, 1992), Table 1 shall be deemed to be in compliance with the appropriate vapor pressure limits for the material, provided actual operating temperature does not exceed the corresponding maximum temperature listed. [District Rule 4451, 6.3.3] Federally Enforceable Through Title V Permit
38. Copies of the inspection log shall be retained by the operator for a minimum of five (5) years after the date of an entry and made available upon request to District personnel. [District Rules 4451, 6.2.2, 6.2.3, and 2520, 9.4.2] Federally Enforceable Through Title V Permit
39. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall be inspected for leaks with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. [District Rule 4452, 5.1.1] Federally Enforceable Through Title V Permit
40. Any pump shall be visually inspected weekly. Whenever volatile organic liquids are observed dripping from a pump seal, the seal shall be checked within three (3) day with a portable hydrocarbon detection instrument in accordance with EPA Method 21 to determine if a leak is present or the drippage stopped with the same time frame. [District Rule 4452, 5.1.2] Federally Enforceable Through Title V Permit
41. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall not leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter from the potential source with an instrument calibrated with methane or the drip liquid VOCs at a rate of more than three (3) drops per minute. [District Rule 4452, 5.1.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

42. Any person operating a pump or compressor which handles a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which is leaking shall repair the leaking device within 15 calendar days. If the leaking device is essential and cannot be repaired within 15 days after detection, one (1) of the following actions shall be taken: (a) replace the leaking device and inspect for leaks within three days after detection, (b) vent emissions to vapor recovery device that is at least 94 percent efficient as measured by EPA Method 25, or to a flare that satisfies the requirements of 40 CFR 60.18, or (c) repair the essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4452, 5.2.1] Federally Enforceable Through Title V Permit
43. A readily visible identification, in the form of a weather-proof tag shall be attached to any pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which leaks. Pumps or compressors which handle a VOC, or any associated seal fluid systems which circulates a fluid through or between seals on process pumps or compressors, to be repaired at the next shutdown shall be tagged, marked or coded in a manner easily identifiable by District personnel. [District Rule 4452, 5.2.2] Federally Enforceable Through Title V Permit
44. Sampling of a seal shall be performed one (1) centimeter from the outer end of the shaft seal interface or at a distance of one (1) centimeter of any other point on the seal which could leak. [District Rule 4452, 6.3.1.2] Federally Enforceable Through Title V Permit
45. Sampling of atmospheric vents on pump and compressor fluid systems shall be measured in the plane of the opening of the vent at the centrad. [District Rule 4452, 6.3.1.3] Federally Enforceable Through Title V Permit
46. Each operator shall maintain an inspection log containing, at a minimum, the following: name, location, type of components, and description of any unit where leaking components are found; date of leak detection, emission level (ppm) of leak, and method of detection; date and emission level of recheck after leak is repaired; identification of leaks that cannot be repaired until next process unit turnaround; total number of components inspected, and total number and percentage of leaking components found for each component type. [District Rules 4451, 6.2.1 & 4452, 6.2.1] Federally Enforceable Through Title V Permit
47. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
48. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
49. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
50. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
51. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

52. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
53. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
54. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
55. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
56. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-33-52-11

EXPIRATION DATE: 08/31/2007

SECTION: 28 TOWNSHIP: 29S RANGE: 27E

## EQUIPMENT DESCRIPTION:

86.8 MM BTU/HR CATALYTIC REFORMING UNIT #26 INCLUDING A DEPENTANIZER SERVICE TOWER (26-V13), REBOILER STEAM CONDENSATE BALANCE DRUM (26-D31), 2 FEED/BOTTOMS EXCHANGERS (26-E45 A/B), 2 OVERHEAD CONDENSERS (26-E46 A/B), DISTILLATE COOLER (26-E47), 2 BOTTOMS PUMPS (26-P37 A/B), AND 2 REFLUX PUMPS (26 P38 A/B)

## PERMIT UNIT REQUIREMENTS

---

1. Fuel gas sulfur content (as H<sub>2</sub>S) shall not exceed 0.10 gr/dscf (160 ppmv) over a three-hour rolling average and shall be continuously monitored and recorded. [NSPS 40 CFR Part 60, Subpart J] Federally Enforceable Through Title V Permit
2. Permittee shall meet all applicable requirements of NSPS Subparts A, J, and GGG. [NSPS 40 CFR Part 60, Subparts A, J, and GGG] Federally Enforceable Through Title V Permit
3. Spent caustics and waste liquids shall be disposed of in a manner preventing the creation of odors. [District Rule 4102] Federally Enforceable Through Title V Permit
4. Valves and flanges shall be operated free of leaks (as defined by Rule 4451), inspected, labeled and records kept as required by Rule 4451. [District Rule 4451] Federally Enforceable Through Title V Permit
5. Leaks from valves and connectors associated with depentanizer (26-V13) fractionation trays, reboiler steam condensate balance drum (26-D31), 2 feed/bottoms exchangers (26-E45 A/B), 2 overhead condensers (26-E46 A/B), distillate cooler (26-E47), 2 bottoms pumps (26-P37 A/B), 2 reflux pumps (26 P38 A/B) and subject to the provisions of Rule 4451 shall be defined as a reading of methane on a portable hydrocarbon detection instrument in excess of 100 ppmv above background when measured one (1) cm from potential source. [District NSR Rule] Federally Enforceable Through Title V Permit
6. Leaks from seals on pumps 26-P37A/B and 26-P38A/B and subject to the provisions of Rule 4452 shall be defined as a reading of methane on a portable hydrocarbon detection instrument in excess of 500 ppmv above background when measured one (1) cm from potential source. [District NSR Rule] Federally Enforceable Through Title V Permit
7. Pump and compressor seals shall operated free of leaks (as defined by Rule 4452), inspected, labeled and records kept as required by Rule 4452. [District Rule 4452] Federally Enforceable Through Title V Permit
8. Vessels shall be depressurized (during turnaround) as required by Rule 4454. [District Rule 4454] Federally Enforceable Through Title V Permit
9. Fugitive volatile organic compound (VOC) emissions, as determined by annual component count and District approved emission factors, shall not exceed 761.4 lb/day. [District NSR Rule] Federally Enforceable Through Title V Permit
10. Heaters 26H11A/B, 26H12, 26H13, 26H15 and 26H17 emission rates shall not exceed NO<sub>x</sub> (as NO<sub>2</sub>): 0.18 lb/MMBtu or 147 ppmvd @ 3% O<sub>2</sub>, and CO: 400 ppmvd @ 3% O<sub>2</sub>. Emission limits are on a one hour average. [District Rules 2201, 4305, & 4351] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

11. Heaters 26H11A/B, 26H13 and 26H15 stack concentration of NO<sub>x</sub> (as NO<sub>2</sub>), CO, and O<sub>2</sub> shall be measured at least on a monthly basis using District approved portable analyzers. [District Rule 4305] Federally Enforceable Through Title V Permit
12. The permittee shall maintain records of the date and time of NO<sub>x</sub>, CO, and O<sub>2</sub> measurements, the measured NO<sub>2</sub> and CO concentrations corrected to 3% O<sub>2</sub>, and the O<sub>2</sub> concentration. The records must also include a description of any corrective action taken to maintain the emissions within the acceptable range. These records shall be retained at the facility for a period of no less than 5 years and shall be made available for District inspection upon request. [District Rule 4305] Federally Enforceable Through Title V Permit
13. If the NO<sub>x</sub> and/or CO concentrations, as measured by the portable analyzer, exceed the allowable emissions rate, the permittee shall notify the District and bring back to compliant levels within one (1) hour after detection. If the portable analyzer readings continue to exceed the allowable emissions rate, the permittee shall conduct an emissions test within 60 days, utilizing District-approved test methods, to demonstrate compliance with the applicable emissions limits. [District Rule 4305] Federally Enforceable Through Title V Permit
14. Heaters 26H12 and 26H17 shall not be operated for any reason until necessary retrofits are made to comply with the applicable requirements of District Rules 4305 and 4351. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
15. No modifications to heaters 26H12 and 26H17 shall be performed without an Authority to Construct for that modification(s), except for changes specified in the condition below. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
16. The fuel supply line(s) shall be physically disconnected from heaters 26H12 and 26H17. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
17. Source testing for the indicated emission limits shall be performed within 60 days of recommencing operation of heaters 26H12 or 26H17. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
18. Source testing for NO<sub>x</sub> and CO emissions shall be conducted not less than once every 12 months, except as provided below. [District Rules 4305 & 4351] Federally Enforceable Through Title V Permit
19. Source testing for NO<sub>x</sub> and CO emissions shall be conducted not less than once every 36 months if compliance is demonstrated on two consecutive annual tests. [District Rules 4305 & 4351] Federally Enforceable Through Title V Permit
20. If permittee fails any compliance demonstration for NO<sub>x</sub> and/or CO emission limits when testing not less than once every 36 months, compliance with NO<sub>x</sub> and CO emission limits shall be demonstrated not less than once every 12 months. [District Rules 4305 & 4351] Federally Enforceable Through Title V Permit
21. Source test results from an individual unit that is identical to this unit, in terms of rated capacity, operational conditions, fuel used, and control method, as approved by the APCO, will satisfy the NO<sub>x</sub> and CO source testing requirement. [District Rules 4305 & 4351] Federally Enforceable Through Title V Permit
22. Source testing shall be by District witnessed, or authorized, sample collection by ARB certified testing laboratory. [District Rules 4305 & 4351] Federally Enforceable Through Title V Permit
23. Source testing shall be conducted using the methods and procedures approved by the District. The District must be notified at least 30 days prior to any compliance source test, and a source test plan must be submitted for approval at least 15 days prior to testing. [District Rule 1081] Federally Enforceable Through Title V Permit
24. The results of each source test shall be submitted to the District within 60 days thereafter. [District Rule 1081] Federally Enforceable Through Title V Permit
25. The following test methods shall be used: NO<sub>x</sub> (ppmv) - EPA Method 7E or ARB Method 100, NO<sub>x</sub> (lb/MMBtu) - EPA Method 19, CO (ppmv) - EPA Method 10 or ARB Method 100, and stack gas oxygen - EPA Method 3 or 3A or ARB Method 100. [District Rules 1081, 4305, and 4351] Federally Enforceable Through Title V Permit
26. Compliance with fugitive VOC emission limit shall be demonstrated by annual component count and District approved emission factors. [District NSR Rule] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

27. Permittee shall maintain records of hhv of fuel burned and cumulative annual fuel use for a period of five years and shall make such records readily available for District inspection upon request. [District NSR Rule] Federally Enforceable Through Title V Permit
28. Heaters 26H12 and 26H17 shall not be operated unless the owner or operator applies to modify the Title V permit to address the requirements of District Rule 2520, section 9.0 for this permit unit. [District Rule 2520, 9.0] Federally Enforceable Through Title V Permit
29. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit
30. If permittee fails any compliance demonstration for NO<sub>x</sub> and CO emission limits when testing not less than once every 36 months, compliance with NO<sub>x</sub> and CO emission limits shall be demonstrated not less than once every 12 months. [District Rules 2520, 9.3.2, 4305 and 4351] Federally Enforceable Through Title V Permit
31. Annual test results submitted to the District from unit(s) representing a group of units may be used to measure NO<sub>x</sub> emissions of this permit for that group, provided the selection of the representative unit(s) is approved by the APCO prior to testing. Should any of the representative units exceed the required NO<sub>x</sub> emission limits of this permit, each of the units in the group shall demonstrate compliance by emissions testing within 90 days of the failed test. (This requirement shall not supersede a more stringent NSR or PSD permit testing requirement.) [District Rules 2520, 9.3.2, 4305, 6.3.2, and 4351, 6.3] Federally Enforceable Through Title V Permit
32. The following conditions must be met for representative unit(s) to be used to test for NO<sub>x</sub> limits for a group of units: 1) all units are initially source tested and emissions from each unit in group are less than 90% of the permitted value and vary 25% or less from the average of all runs, 2) all units in group are similar in terms of rated heat input (rating not to exceed 100 MMBtu/hr), make and series, operation conditions, and control method, and 3) the group is owned by a single owner and located at a single stationary source. [District Rules 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
33. All units in a group for which representative units are source for NO<sub>x</sub> emissions shall have received the same maintenance and tune-up procedures as the representative unit(s). These tune-up procedures shall be completed according to District Rule 4304 (Adopted October 19, 1995) and tune-up test results shall show comparable results for each unit in the group. Records shall be maintained for each unit of the group including all preventative and corrective maintenance work done. [District Rule 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
34. All units in a group for which representative units are source tested for NO<sub>x</sub> emissions of this permit shall be fired on the same fuel type during the entire compliance period. If a unit switches for any time to an alternate fuel type (e.g. from natural gas to oil) then that unit shall not be considered part of the group and shall be required to undergo a source test for all fuel types used, within one year of the switch. [District Rules 2520, 9.3.2 and 4305, 6.3.2] Federally Enforceable Through Title V Permit
35. The number of representative units source tested for NO<sub>x</sub> emissions shall be at least 30% of the total number of units in the group. The units included in the 30% shall be rotated, so that in 3 years, all units in the entire group will have been tested at least once. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
36. The portable analyzer shall be calibrated prior to each use with a two-point calibration method (zero and span). Calibration shall be performed with certified calibration gases. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
37. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
38. All required source testing shall conform to the compliance testing procedures described in District Rule 1081(Last Amended December 19, 1993). [District Rule 1081, and Kern County Rule 108.1] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

39. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
40. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. Compliance with this requirement may be demonstrated by testing the sulfur content of each fuel and determining the maximum hourly emissions of sulfur compounds by multiplying the sulfur content of each fuel in lb/MMBtu by the maximum heat input rating of the unit; or by source testing in combination with fuel analysis. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
41. When complying with sulfur emission limits by fuel analysis or by a combination of source testing and fuel analysis, each fuel source shall be tested weekly for sulfur content and higher heating value. If compliance with the fuel sulfur content limit and sulfur emission limits has been demonstrated for 8 consecutive weeks for a fuel source, then the fuel testing frequency shall be semi-annually. If a semi-annual fuel content source test fails to show compliance, weekly testing shall resume. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
42. When complying with SO<sub>x</sub> emission limits by testing of stack emissions, testing shall be performed not less than once every 12 months using EPA Method 6B; or Method 8; or, for units using gaseous fuel scrubbed for sulfur pre-combustion, a grab sample analysis by GC-FPD/TCD performed in the laboratory and EPA Method 19 to calculated emissions. Gaseous fuel fired units demonstrating compliance on two consecutive annual source tests shall be tested not less than once every thirty-six months; however, annual source testing shall resume if any test fails to show compliance. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
43. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
44. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
45. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). To demonstrate compliance with this requirement the operator shall test the sulfur content of each fuel source and demonstrate the sulfur content does not exceed 3.3% by weight for gaseous fuels; or determine that the concentration of sulfur compounds in the exhaust does not exceed the concentration limit by a combination of source testing and fuel analysis. [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
46. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
47. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
48. Valves, threaded connections, and flanges shall not leak VOCs at a rate of more than three (3) drops per minute or leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking components of any component type does not exceed two (2) percent of the total number of components of that type. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
49. Pressure relief valves (PRVs) shall not leak VOCs in excess of 10,000 ppm above background when measured in the plane at the centroid of any atmospheric vent with an instrument calibrated with methane, provided the total number of leaking PRVs does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

50. Process drains shall not leak VOCs in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking process drains does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
51. The facility shall not use any valve, other than a valve on a product sampling line, a safety pressure relief valve, or a double block and bleeder valve, which is located at the end of a pipe or line containing VOCs unless such valve is sealed with a blind flange, plug, or cap; not including loading spouts and water drain valves. [District Rule 4451, 5.1.4] Federally Enforceable Through Title V Permit
52. Every leaking valve, flange, threaded connection, process drain and pressure relief valve shall be affixed with a record of inspection which shall bear a legible record of all inspections for at least a fifteen month period or coded with the records kept in a centralized location. [District Rule 4451, 5.1.5] Federally Enforceable Through Title V Permit
53. All valves, threaded connections and PRVs handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. If less than two (2) percent of the components of any component type, except PRVs, are found to leak during each five (5) consecutive quarterly inspections, the inspection frequency for that component type may be changed from quarterly to annual. If any annual inspection shows that two (2) percent or more of all of a specific component type subject to the prohibitions of this rule are leaking, then quarterly inspections of that component type shall be resumed. [District Rule 4451, 5.2.1] Federally Enforceable Through Title V Permit
54. All flanges and process drains handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every 12 months. [District Rule 4451, 5.2.2] Federally Enforceable Through Title V Permit
55. Within three (3) days after any pressure relief valve vents to the atmosphere, the operator shall inspect with a portable hydrogen detection instrument any such PRV and shall repair any leak. The inspection shall be accomplished by sampling for vapors with a portable hydrocarbon detection instrument and by visual examination for indication of liquid leakage. [District Rule 4451, 5.2.3 & 5.2.4] Federally Enforceable Through Title V Permit
56. Any leaking valve, PRV, threaded connection, flange and process drain shall be identified by affixing a weatherproof, readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until repair and reinspection documents compliance with the requirements of Rule 4451 (Amended December 17, 1992). [District Rule 4451, 5.2.5] Federally Enforceable Through Title V Permit
57. Each leak detected shall be recorded on the inspection record along with the date of inspection, component identification number, actual instrument reading, and the inspector's initials. [District Rule 4451, 5.2.6] Federally Enforceable Through Title V Permit
58. Within 15 days after detection any valve, pressure relief valve, flange, threaded connection, or process drain found to leak shall be repaired or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25. [District Rule 4451, 5.3.1] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

59. If a valve, pressure relief valve, flange, threaded connection, or process drain is found to leak and cannot be repaired to a no-leak condition without requiring the shutdown of essential refinery operations, the following repair schedule shall apply: (a) If the leak rate is less than ten (10) drops per minute the APCO shall be notified of the expected date of repair, not to exceed one (1) year or the date of the next process unit turnaround whichever is less for each valve, pressure relief valve, flange, threaded connection, and process drain, and the actual date of repair for each valve, pressure relief valve, flange, threaded connection, and process drain. (b) If the leak rate is greater than nine (9) drops per minute or 10,000 ppm measured one (1) centimeter from the source, the APCO shall be notified of an emergency repair, within 15 days after detection, to reduce the leak to less than ten (10) drops per minute or 10,000 ppm as methane measured one (1) centimeter from the source, or the venting, within 30 days after detection, of the emission to a flare or vapor control system that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25, or a demonstration, with 30 days after detection, that the repair schedules are infeasible. The demonstration shall include documentation that the component is an essential device and that no vapor control device that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25 exists. (c) Repair an essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4451, 5.3.2] Federally Enforceable Through Title V Permit
60. Analysis of halogenated exempt compounds shall be by ARB Method 422. [District Rule 4451, 6.3.1] Federally Enforceable Through Title V Permit
61. Efficiency of VOC destruction device shall be measured by EPA Method 25, 25a, or 25b, as applicable. [District Rule 4451, 6.3.2] Federally Enforceable Through Title V Permit
62. The TVP of organic liquids, including light crude and petroleum distillates, shall be measured using Reid vapor pressure ASTM Method No. D-323 modified by maintaining the hot water bath at storage temperature. Where storage temperature is above 1000F, TVP may be determined by Reid Vapor pressure at 1000F and ARB approved calculations. Organic liquids listed in Rule 4451 (Amended December 17, 1992), Table 1 shall be deemed to be in compliance with the appropriate vapor pressure limits for the material, provided actual operating temperature does not exceed the corresponding maximum temperature listed. [District Rule 4451, 6.3.3] Federally Enforceable Through Title V Permit
63. Copies of the inspection log shall be retained by the operator for a minimum of five (5) years after the date of an entry and made available upon request to District personnel. [District Rules 4451, 6.2.2, 6.2.3, and 2520, 9.4.2] Federally Enforceable Through Title V Permit
64. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall be inspected for leaks with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. [District Rule 4452, 5.1.1] Federally Enforceable Through Title V Permit
65. Any pump shall be visually inspected weekly. Whenever volatile organic liquids are observed dripping from a pump seal, the seal shall be checked within three (3) day with a portable hydrocarbon detection instrument in accordance with EPA Method 21 to determine if a leak is present or the drippage stopped with the same time frame. [District Rule 4452, 5.1.2] Federally Enforceable Through Title V Permit
66. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall not leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter from the potential source with an instrument calibrated with methane or the drip liquid VOCs at a rate of more than three (3) drops per minute. [District Rule 4452, 5.1.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

67. Any person operating a pump or compressor which handles a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which is leaking shall repair the leaking device within 15 calendar days. If the leaking device is essential and cannot be repaired within 15 days after detection, one (1) of the following actions shall be taken: (a) replace the leaking device and inspect for leaks within three days after detection, (b) vent emissions to vapor recovery device that is at least 94 percent efficient as measured by EPA Method 25, or to a flare that satisfies the requirements of 40 CFR 60.18, or (c) repair the essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4452, 5.2.1] Federally Enforceable Through Title V Permit
68. A readily visible identification, in the form of a weather-proof tag shall be attached to any pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which leaks. Pumps or compressors which handle a VOC, or any associated seal fluid systems which circulates a fluid through or between seals on process pumps or compressors, to be repaired at the next shutdown shall be tagged, marked or coded in a manner easily identifiable by District personnel. [District Rule 4452, 5.2.2] Federally Enforceable Through Title V Permit
69. Sampling of a seal shall be performed one (1) centimeter from the outer end of the shaft seal interface or at a distance of one (1) centimeter of any other point on the seal which could leak. [District Rule 4452, 6.3.1.2] Federally Enforceable Through Title V Permit
70. Sampling of atmospheric vents on pump and compressor fluid systems shall be measured in the plane of the opening of the vent at the centrad. [District Rule 4452, 6.3.1.3] Federally Enforceable Through Title V Permit
71. Each operator shall maintain an inspection log containing, at a minimum, the following: name, location, type of components, and description of any unit where leaking components are found; date of leak detection, emission level (ppm) of leak, and method of detection; date and emission level of recheck after leak is repaired; identification of leaks that cannot be repaired until next process unit turnaround; total number of components inspected, and total number and percentage of leaking components found for each component type. [District Rules 4451, 6.2.1 & 4452, 6.2.1] Federally Enforceable Through Title V Permit
72. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
73. The owner or operator may apply to the Administrator for a determination of equivalency for any means of emission limitation that achieves a reduction in emissions of VOC at least equivalent to the reduction in emissions of VOC achieved by the controls required in Subpart GGG. In doing so, the owner or operator shall comply with the requirements of 40 CFR 60.484. [40 CFR 60.592(c)] Federally Enforceable Through Title V Permit
74. Each pump in light liquid service (PLLS) shall be monitored monthly to detect leaks by the methods specified in 40 CFR 60.485(b), except as provided in 40 CFR 60.482-1(c) and 40 CFR 60.482-2(d), (e), and (f). Each pump in light liquid service shall be checked by visual inspection each calendar week for indications of liquids dripping from the pump seal. A leak is detected if an instrument reading of 10,000 ppm or greater is measured or if there are indications of liquids dripping from the pump seal. [40 CFR 60.482-2(a) and (b)] Federally Enforceable Through Title V Permit
75. When a leak is detected for each PLLS, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in 40 CFR 60.482-9. A first attempt at repair shall be made no later than 5 calendar days after each leak is detected. [40 CFR 60.482-2(c)] Federally Enforceable Through Title V Permit
76. Each PLLS equipped with a dual mechanical seal system that includes a barrier fluid system is exempt from the requirements of 40 CFR 60.482-2(a) provided the requirements specified in 40 CFR 60.482-2(d)(1) through (6) are met. [40 CFR 60.482(d)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

77. Any PLLS that is designated, as described in 40 CFR 60.486(e)(1) and (2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of 40 CFR 60.482-2(a), (c), and (d) if the pump meets the requirements specified in 40 CFR 60.482-2(e)(1), (2), and (3). [40 CFR 60.482-2(e)] Federally Enforceable Through Title V Permit
78. If any PLLS is equipped with a closed vent system capable of capturing and transporting leakage from the seal or seals to a control device that complies with the requirements of 40 CFR 60.482-10, it is exempt from the requirements of 40 CFR 60.482-2(a) through (e). [40 CFR 60.482-2(f)] Federally Enforceable Through Title V Permit
79. Any pump in PLLS that is designated, as described in 40 CFR 60.486(f)(1), as an unsafe-to-monitor pump is exempt from the monitoring and inspection requirements of 40 CFR 60.482-2(a) and 40 CFR 60.482-2(d)(4) through (6) if: 1) The owner or operator of the pump demonstrates that the pump is unsafe-to-monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with 40 CFR 60.482-2(a); and 2) The owner or operator of the pump has a written plan that requires monitoring of the pump as frequently as practicable during safe-to-monitor times but not more frequently than the periodic monitoring schedule otherwise applicable, and repair of the equipment according to the procedures in 40 CFR 60.482-2(c) if a leak is detected. [40 CFR 60.482-2(g)] Federally Enforceable Through Title V Permit
80. Any pump that is located within the boundary of an unmanned plant site is exempt from the weekly visual inspection requirement of 40 CFR 60.482-2(a)(2) and (d)(4) and the daily requirements of 40 CFR 60.482-2(d)(5), provided that each pump is visually inspected as often as practicable and at least monthly. [40 CFR 60.482-2(h)] Federally Enforceable Through Title V Permit
81. Except during pressure releases, each pressure relief device in gas/vapor service shall be operated with no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as determined by the methods specified in 40 CFR 60.485(c). [40 CFR 60.482-4(a)] Federally Enforceable Through Title V Permit
82. After each pressure release, the pressure relief device shall be returned to a condition of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, as soon as practicable, but no later than 5 calendar days after the pressure release, except as provided in 40 CFR 60.482-9. No later than 5 calendar days after the pressure release, the pressure relief device shall be monitored to confirm the conditions of no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, by the methods specified in 40 CFR 60.485(c). [40 CFR 60.482-4(b)] Federally Enforceable Through Title V Permit
83. Any pressure relief device that is routed to a process or fuel gas system or equipped with a closed vent system capable of capturing and transporting leakage through the pressure relief device to a control device as described in 40 CFR 60.482-10 is exempted from the requirements of 40 CFR 60.482-4(a) and (b). [40 CFR 60.482-4(c)] Federally Enforceable Through Title V Permit
84. Any pressure relief device that is equipped with a rupture disk upstream of the pressure relief device is exempt from the 40 CFR 60.482-4(a) and (b), provided the owner or operator complies with the requirements in 40 CFR 60.482-4(d)(2) of this section. After each pressure release, a new rupture disk shall be installed upstream of the pressure relief device as soon as practicable, but no later than 5 calendar days after each pressure release, except as provided in 40 CFR 60.482-9. [40 CFR 60.482-4(d)] Federally Enforceable Through Title V Permit
85. Except for in-situ sampling systems and sampling systems without purges, each sampling connection system shall be equipped with a closed-purge, closed-loop, or closed-vent system, except as provided in 40 CFR 60.482-1(c). Each closed-purge, closed-loop, or closed-vent system shall comply with the requirements specified in 40 CFR 60.482-5(b)(1), (2), (3), and (4). [40 CFR 60.482-5(a), (b), and (c)] Federally Enforceable Through Title V Permit
86. Each open-ended valve or line shall be equipped with a cap, blind flange, plug, or a second valve, except as provided in 40 CFR 60.482-1(c). The cap, blind flange, plug, or second valve shall seal the open end at all times except during operations requiring process fluid flow through the open-ended valve or line. When a double block-and-bleed system is being used, the bleed valve or line may remain open during operations that require venting the line between the block valves but shall comply with this condition at all other times. [40 CFR 60.482-6(a) and (c)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

87. Each open-ended valve or line equipped with a second valve shall be operated in a manner such that the valve on the process fluid end is closed before the second valve is closed. [40 CFR 60.482-6(b)] Federally Enforceable Through Title V Permit
88. Open-ended valves or lines in an emergency shutdown system which are designed to open automatically in the event of a process upset are exempt from the requirements of 40 CFR 60.482-6(a), (b) and (c). [40 CFR 60.482-6(d)] Federally Enforceable Through Title V Permit
89. Open-ended valves or lines containing materials which would autocatalytically polymerize or would present an explosion, serious overpressure, or other safety hazard if capped or equipped with a double block and bleed system as specified in 40 CFR 60.482-6(a) through (c) are exempt from the requirements of 40 CFR 60.482-6(a) through (c). [40 CFR 60.482-6(e)] Federally Enforceable Through Title V Permit
90. Each valve in gas/vapor service and in light liquid service shall be monitored monthly to detect leaks by the methods specified in 40 CFR 60.485(b) and shall comply with 40 CFR 60.482-7(b) through (e), except as provided in 40 CFR 60.482-7(f), (g), and (h), 40 CFR 60.483-1, 40 CFR 60.483-2, and 40 CFR 60.482-1(c). A leak is detected if an instrument reading of 10,000 ppm or greater is measured. [40 CFR 60.482-7(a) and (b)] Federally Enforceable Through Title V Permit
91. Any valve in gas/vapor service or in light liquid service for which a leak is not detected for 2 successive months may be monitored the first month of every quarter, beginning with the next quarter, until a leak is detected. If a leak is detected, the valve shall be monitored monthly until a leak is not detected for 2 successive months. [40 CFR 60.482-7(c)] Federally Enforceable Through Title V Permit
92. When a leak is detected for any valve in gas/vapor service or in light liquid service, it shall be repaired as soon as practicable, but no later than 15 calendar days after the leak is detected, except as provided in 40 CFR 60.482-9. A first attempt at repair shall be made no later than 5 calendar days after each leak is detected. First attempts at repair include, but are not limited to, the best practices specified in 40 CFR 60.482-7(e)(1), (2), (3), and (4), where practicable. [40 CFR 60.482-7(d) and (e)] Federally Enforceable Through Title V Permit
93. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(e)(2), for no detectable emissions, as indicated by an instrument reading of less than 500 ppm above background, is exempt from the requirements of 40 CFR 60.482-7(a) if the valve meets the requirements specified in 40 CFR 60.482-7(f)(1), (2), and (3). [40 CFR 60.482-7(f)] Federally Enforceable Through Title V Permit
94. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(f)(1), as an unsafe-to-monitor valve is exempt from the requirements of 40 CFR 60.482-7(a) if: 1) The owner or operator of the valve demonstrates that the valve is unsafe to monitor because monitoring personnel would be exposed to an immediate danger as a consequence of complying with 40 CFR 60.482-7(a); and 2) The owner or operator of the valve adheres to a written plan that requires monitoring of the valve as frequently as practicable during safe-to-monitor times. [40 CFR 60.482-7(g)] Federally Enforceable Through Title V Permit
95. Any valve in gas/vapor service or in light liquid service that is designated, as described in 40 CFR 60.486(f)(2), as a difficult-to-monitor valve is exempt from the requirements of 40 CFR 60.482-7(a) if: 1) The owner or operator of the valve demonstrates that the valve cannot be monitored without elevating the monitoring personnel more than 2 meters above a support surface; 2) The process unit within which the valve is located either becomes an affected facility through 40 CFR 60.14 or 40 CFR 60.15 or the owner or operator designates less than 3.0 percent of the total number of valves as difficult-to-monitor; and 3) The owner or operator of the valve follows a written plan that requires monitoring of the valve at least once per calendar year. [40 CFR 60.482-7(h)] Federally Enforceable Through Title V Permit
96. The owner or operator may elect to comply with the applicable provisions for valves in gas/vapor service and in light liquid service as specified in 40 CFR 60.483-1 and 60.483-2. [40 CFR 60.592(b)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

97. If evidence of a potential leak is found by visual, audible, olfactory, or any other detection method at pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors, the owner or operator shall follow either one of the following procedures: 1) The owner or operator shall monitor the equipment within 5 days by the method specified in 40 CFR 60.485(b) and shall comply with the requirements of 40 CFR 60.482-8(b) through (d); or 2) The owner or operator shall eliminate the visual, audible, olfactory, or other indication of a potential leak. A leak is detected if an instrument reading of 10,000 ppm or greater is measured. [40 CFR 60.482-8(a) and (b)] Federally Enforceable Through Title V Permit
98. When a leak is detected in pumps and valves in heavy liquid service, pressure relief devices in light liquid or heavy liquid service, and connectors, it shall be repaired as soon as practicable, but not later than 15 calendar days after it is detected, except as provided in 40 CFR 60.482-9. The first attempt at repair shall be made no later than 5 calendar days after each leak is detected. First attempts at repair include, but are not limited to, the best practices described under 40 CFR 60.482-7(e). [40 CFR 60.482-8(c) and (d)] Federally Enforceable Through Title V Permit
99. For closed vent systems and control devices, vapor recovery systems shall be designed and operated to recover the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, whichever is less stringent. [40 CFR 60.482-10(b)] Federally Enforceable Through Title V Permit
100. For closed vent systems and control devices, enclosed combustion devices shall be designed and operated to reduce the VOC emissions vented to them with an efficiency of 95 percent or greater, or to an exit concentration of 20 parts per million by volume, on a dry basis, corrected to 3 percent oxygen, whichever is less stringent or to provide a minimum residence time of 0.75 seconds at a minimum temperature of 816 degrees C. [40 CFR 60.482-10(c)] Federally Enforceable Through Title V Permit
101. Flares used to comply with Subpart GGG shall comply with the requirements of 40 CFR 60.18. [40 CFR 60.482-10(d)] Federally Enforceable Through Title V Permit
102. Owners or operators of control devices used to comply with the provisions of Subpart GGG shall monitor these control devices to ensure that they are operated and maintained in conformance with their designs. [40 CFR 60.482-10(e)] Federally Enforceable Through Title V Permit
103. Except as provided in 40 CFR 60.482-10(i) through (k), each closed vent system used to comply with the provisions of Subpart GGG shall be inspected according to the procedures and schedule specified in 40 CFR 60.482-10(f)(1) and (f)(2). Leaks, as indicated by an instrument reading greater than 500 parts per million by volume above background or by visual inspections, shall be repaired as soon as practicable except as provided in 40 CFR 60.482-10(h). A first attempt at repair shall be made no later than 5 calendar days after the leak is detected. Repair shall be completed no later than 15 calendar days after the leak is detected. [40 CFR 60.482-10(f) and (g)] Federally Enforceable Through Title V Permit
104. Delay of repair of a closed vent system for which leaks have been detected is allowed if the repair is technically infeasible without a process unit shutdown or if the owner or operator determines that emissions resulting from immediate repair would be greater than the fugitive emissions likely to result from delay of repair. Repair of such equipment shall be complete by the end of the next process unit shutdown. [40 CFR 60.482-10(h)] Federally Enforceable Through Title V Permit
105. If a vapor collection system or closed vent system is operated under a vacuum, it is exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2). [40 CFR 60.482-10(i)] Federally Enforceable Through Title V Permit
106. Any parts of the closed vent system that are designated, as described in 40 CFR 60.482-10(l)(1), as unsafe to inspect are exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2) if they comply with the requirements specified in 40 CFR 60.482-10(j)(1) and (j)(2). [40 CFR 60.482-10(j)] Federally Enforceable Through Title V Permit
107. Any parts of the closed vent system that are designated, as described in 40 CFR 60.482-10(l)(2), as difficult to inspect are exempt from the inspection requirements of 40 CFR 60.482-10(f)(1)(i) and (f)(2) if they comply with the requirements specified in 40 CFR 60.482-10(k)(1) through (k)(3). [40 CFR 60.482-10(k)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

108. The owner or operator shall record the following information: 1) Identification of all parts of the closed vent system that are designated as unsafe to inspect, an explanation of why the equipment is unsafe to inspect, and the plan for inspecting the equipment; 2) Identification of all parts of the closed vent system that are designated as difficult to inspect, an explanation of why the equipment is difficult to inspect, and the plan for inspecting the equipment; 3) For each inspection during which a leak is detected, a record of the information specified in 40 CFR 60.486(c); 4) For each inspection conducted in accordance with 40 CFR 60.485(b) during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected; and 5) For each visual inspection conducted in accordance with 40 CFR 60.482-10(f)(1)(ii) during which no leaks are detected, a record that the inspection was performed, the date of the inspection, and a statement that no leaks were detected. [40 CFR 60.482-10(l)] Federally Enforceable Through Title V Permit
109. Closed vent systems and control devices used to comply with provisions Subpart GGG shall be operated at all times when emissions may be vented to them. [40 CFR 60.482-10(m)] Federally Enforceable Through Title V Permit
110. In conducting the performance tests required in 40 CFR 60.8, the owner or operator shall use as reference methods and procedures the test methods in 40 CFR 60, Appendix A or other methods and procedures as specified in 40 CFR 60.485, except as provided in 40 CFR 60.8(b). [40 CFR 60.485(a)] Federally Enforceable Through Title V Permit
111. The owner or operator shall determine compliance with the standards in 40 CFR 60.482, 60.483, and 60.484 as follows: Method 21 shall be used to determine the presence of leaking sources. The instrument shall be calibrated before use each day of its use by the procedures specified in Method 21. The following calibration gases shall be used: (i) Zero air (less than 10 ppm of hydrocarbon in air); and (ii) A mixture of methane or n-hexane and air at a concentration of about, but less than, 10,000 ppm methane or n-hexane. [40 CFR 60.485(b)] Federally Enforceable Through Title V Permit
112. The owner or operator shall determine compliance with the no detectable emission standards in 40 CFR 60.482-2(e), 60.482-3(i), 60.482-4, 60.482-7(f), and 60.482-10(e) as follows: 1) The requirements of 40 CFR 60.485(b) shall apply. 2) Method 21 shall be used to determine the background level. All potential leak interfaces shall be traversed as close to the interface as possible. The arithmetic difference between the maximum concentration indicated by the instrument and the background level is compared with 500 ppm for determining compliance. [40 CFR 60.485(c)] Federally Enforceable Through Title V Permit
113. The owner or operator shall test each piece of equipment unless demonstrated that a process unit is not in VOC service, i.e., that the VOC content would never be reasonably expected to exceed 10 percent by weight. For purposes of this demonstration, the following methods and procedures shall be used: 1) Procedures that conform to the general methods in ASTM E260-73, 91, or 96, E168-67, 77, or 92, E169-63, 77, or 93 (incorporated by reference as seen in 40 CFR 60.17) shall be used to determine the percent VOC content in the process fluid that is contained in or contacts a piece of equipment; 2) Organic compounds that are considered by the Administrator to have negligible photochemical reactivity may be excluded from the total quantity of organic compounds in determining the VOC content of the process fluid; and 3) Engineering judgment may be used to estimate the VOC content, if a piece of equipment had not been shown previously to be in service. If the Administrator disagrees with the judgment, the previous two procedures as specified in 40 CFR 60.485(d)(1) and (2) shall be used to resolve the disagreement. [40 CFR 60.485(d)] Federally Enforceable Through Title V Permit
114. The owner or operator shall demonstrate that an equipment is in light liquid service by showing that all the following conditions apply: 1) The vapor pressure of one or more of the components is greater than 0.3 kPa at 20 °C (1.2 in. H<sub>2</sub>O at 68 degrees F). Standard reference texts or ASTM D2879-83, 96, or 97 (incorporated by reference as seen in 40 CFR 60.17) shall be used to determine the vapor pressures; 2) The total concentration of the pure components having a vapor pressure greater than 0.3 kPa at 20 degrees Celsius is equal to or greater than 20 percent by weight; and 3) The fluid is a liquid at operating conditions. [40 CFR 60.485(e)] Federally Enforceable Through Title V Permit
115. Samples used in conjunction with 40 CFR 60.485(d), (e), and (g) shall be representative of the process fluid that is contained in or contacts the equipment or the gas being combusted in the flare. [40 CFR 60.485(f)] Federally Enforceable Through Title V Permit
116. The owner or operator shall determine compliance with the standards of flares as specified in 40 CFR 60.485(g)(1), (2), (3), (4), (5), (6), and (7). [40 CFR 60.485(g)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

117. An owner or operator of more than one affected facility subject to the provisions Subpart GGG may comply with the recordkeeping requirements for these facilities in one recordkeeping system if the system identifies each record by each facility. [40 CFR 60.486(a)] Federally Enforceable Through Title V Permit
118. When each leak is detected as specified in 40 CFR 60.482-2, 60.482-3, 60.482-7, 60.482-8, and 60.483-2, the following requirements apply: 1) A weatherproof and readily visible identification, marked with the equipment identification number, shall be attached to the leaking equipment; 2) The identification on a valve may be removed after it has been monitored for 2 successive months as specified in 40 CFR 60.482-7(c) and no leak has been detected during those 2 months; and 3) The identification on equipment except on a valve, may be removed after it has been repaired. [40 CFR 60.486(b)] Federally Enforceable Through Title V Permit
119. When each leak is detected as specified in 40 CFR 60.482-2, 60.482-3, 60.482-7, 60.482-8, and 60.483-2, the following information shall be recorded in a log and shall be kept for 5 years in a readily accessible location: 1) The instrument and operator identification numbers and the equipment identification number; 2) The date the leak was detected and the dates of each attempt to repair the leak; 3) Repair methods applied in each attempt to repair the leak; 4) "Above 10,000" if the maximum instrument reading measured by the methods specified in 40 CFR 60.485(a) after each repair attempt is equal to or greater than 10,000 ppm; 5) "Repair delayed" and the reason for the delay if a leak is not repaired within 15 calendar days after discovery of the leak; 6) The signature of the owner or operator (or designate) whose decision it was that repair could not be effected without a process shutdown; 7) The expected date of successful repair of the leak if a leak is not repaired within 15 days; 8) Dates of process unit shutdown that occur while the equipment is unrepaired; and 9) The date of successful repair of the leak. [40 CFR 60.486(c) and District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
120. The following information pertaining to the design requirements for closed vent systems and control devices described in 40 CFR 60.482-10 shall be recorded and kept in a readily accessible location: 1) Detailed schematics, design specifications, and piping and instrumentation diagrams; 2) The dates and descriptions of any changes in the design specifications; 3) A description of the parameter or parameters monitored, as required in 40 CFR 60.482-10(e), to ensure that control devices are operated and maintained in conformance with their design and an explanation of why that parameter (or parameters) was selected for the monitoring; 4) Periods when the closed vent systems and control devices required in 40 CFR 60.482-2, 60.482-3, 60.482-4, and 60.482-5 are not operated as designed, including periods when a flare pilot light does not have a flame; and 5) Dates of startups and shutdowns of the closed vent systems and control devices required in 40 CFR 60.482-2, 60.482-3, 60.482-4, and 60.482-5. [40 CFR 60.486(d)] Federally Enforceable Through Title V Permit
121. The following information pertaining to all equipment subject to the requirements in 40 CFR 60.482-1 to 60.482-10 shall be recorded in a log that is kept in a readily accessible location: 1) A list of identification numbers for equipment subject to the requirements of Subpart GGG; 2) (i) A list of identification numbers for equipment that are designated for no detectable emissions under the provisions of 40 CFR 60.482-2(e), 60.482-3(i) and 60.482-7(f). (ii) The designation of equipment as subject to the requirements of 40 CFR 60.482-2(e), 60.482-3(i) and 60.482-7(f) shall be signed by the owner or operator; 3) A list of equipment identification numbers for pressure relief devices required to comply with §60.482-4; 4) (i) The dates of each compliance test as required in 40 CFR 60.482-2(e), 60.482-3(i), §60.482-4, and 60.482-7(f). (ii) The background level measured during each compliance test. (iii) The maximum instrument reading measured at the equipment during each compliance test; and 5) A list of identification numbers for equipment in vacuum service. [40 CFR 60.486(e)] Federally Enforceable Through Title V Permit
122. The following information pertaining to all valves subject to the requirements of 40 CFR 60.482-7(g) and (h) and to all pumps subject to the requirements of 40 CFR 60.482-2(g) shall be recorded in a log that is kept in a readily accessible location: 1) A list of identification numbers for valves and pumps that are designated as unsafe-to-monitor, an explanation for each valve or pump stating why the valve or pump is unsafe-to-monitor, and the plan for monitoring each valve or pump; and 2) A list of identification numbers for valves that are designated as difficult-to-monitor, an explanation for each valve stating why the valve is difficult-to-monitor, and the schedule for monitoring each valve. [40 CFR 60.486(f)] Federally Enforceable Through Title V Permit
123. The following information shall be recorded for valves complying with 40 CFR 60.483-2: 1) A schedule of monitoring; 2) The percent of valves found leaking during each monitoring period. [40 CFR 60.486(g)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

124. The following information shall be recorded in a log that is kept in a readily accessible location: 1) Design criterion required in 40 CFR 60.482-2(d)(5) and 60.482-3(e)(2) and explanation of the design criterion; and 2) Any changes to this criterion and the reasons for the changes. [40 CFR 60.486(h)] Federally Enforceable Through Title V Permit
125. The following information shall be recorded in a log that is kept in a readily accessible location for use in determining exemptions as provided in 40 CFR 60.480(d): 1) An analysis demonstrating the design capacity of the affected facility; 2) A statement listing the feed or raw materials and products from the affected facilities and an analysis demonstrating whether these chemicals are heavy liquids or beverage alcohol; and 3) An analysis demonstrating that equipment is not in VOC service. [40 CFR 60.486(i)] Federally Enforceable Through Title V Permit
126. Information and data used to demonstrate that a piece of equipment is not in VOC service shall be recorded in a log that is kept in a readily accessible location. [40 CFR 60.486(j)] Federally Enforceable Through Title V Permit
127. The provisions of 40 CFR 60.7 (b) and (d) do not apply to affected facilities subject to Subpart GGG. [District 40 CFR 60.486(k)] Federally Enforceable Through Title V Permit
128. All semiannual reports to the Administrator shall include the following information, summarized from the information in 40 CFR 60.486: 1) Process unit identification; 2) For each month during the semiannual reporting period, i) Number of valves for which leaks were detected as described in 40 CFR 60.482-7(b) or 40 CFR 60.483-2, (ii) Number of valves for which leaks were not repaired as required in 40 CFR 60.482-7(d)(1), (iii) Number of pumps for which leaks were detected as described in 40 CFR 60.482-2(b) and (d)(6)(i), (iv) Number of pumps for which leaks were not repaired as required in 40 CFR 60.482-2(c)(1) and (d)(6)(ii), (v) Number of compressors for which leaks were detected as described in 40 CFR 60.482-3(f), (vi) Number of compressors for which leaks were not repaired as required in 40 CFR 60.482-3(g)(1), and (vii) The facts that explain each delay of repair and, where appropriate, why a process unit shutdown was technically infeasible; 3) Dates of process unit shutdowns which occurred within the semiannual reporting period; 4) Revisions to items reported in the semiannual report if changes have occurred since the initial report, as required in 40 CFR 60.487 (a) and (b), or subsequent revisions to the initial report. [40 CFR 60.487(c)] Federally Enforceable Through Title V Permit
129. An owner or operator electing to comply with the provisions of 40 CFR 60.483-1 and 60.483-2 shall notify the Administrator of the alternative standard selected 90 days before implementing either of the provisions. [40 CFR 60.487(d)] Federally Enforceable Through Title V Permit
130. An owner or operator shall report the results of all performance tests in accordance with 40 CFR 60.8 of the General Provisions. The provisions of 40 CFR 60.8(d) do not apply to affected facilities subject to the provisions of Subpart GGG except that an owner or operator must notify the Administrator of the schedule for the initial performance tests at least 30 days before the initial performance tests. [40 CFR 60.487(e)] Federally Enforceable Through Title V Permit
131. The semiannual reporting requirements of 40 CFR 60.487(a), (b), and (c) remain in force until and unless EPA, in delegating enforcement authority to a State under section 111(c) of the Act, approves reporting requirements or an alternative means of compliance surveillance adopted by such State. In that event, affected sources within the State will be relieved of the obligation to comply with the requirements of 40 CFR 60.487(a), (b), and (c), provided that they comply with the requirements established by the State. [40 CFR 60.487(f)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

132. Compressors are exempt from the standards of Subpart GGG if the owner or operator demonstrates that a compressor is in hydrogen service. Each compressor is presumed not to be in hydrogen service unless an owner or operator demonstrates that the piece of equipment is in hydrogen service. For a piece of equipment to be considered in hydrogen service, it must be determined that the percent hydrogen content can be reasonably expected always to exceed 50 percent by volume. For purposes of determining the percent hydrogen content in the process fluid that is contained in or contacts a compressor, procedures that conform to the general method described in ASTM E-260, E-168, or E-169 shall be used. An owner or operator may use engineering judgment demonstrate that the percent content exceeds 50 percent by volume, provided the engineering judgment demonstrates that the content clearly exceeds 50 percent by volume. When an owner or operator and the Administrator do not agree on whether a piece of equipment is in hydrogen service, however, the procedures that conform to the general method described in ASTM E-260, E-168, or E-169 shall be used to resolve the disagreement. If an owner or operator determines that a piece of equipment is in hydrogen service, the determination can be revised only after following the procedures that conform to the general method described in ASTM E-260, E-168, or E-169. [40 CFR 60.593(b)] Federally Enforceable Through Title V Permit
133. Any existing reciprocating compressor that becomes an affected facility under provisions of 40 CFR 60.14 or 40 CFR 60.15 is exempt from 40 CFR 60.482-3 (a), (b), (c), (d), (e), and (h) provided the owner or operator demonstrates that recasting the distance piece or replacing the compressor are the only options available to bring the compressor into compliance with the provisions of 40 CFR 60.482-3 (a), (b), (c), (d), (e), and (h). [40 CFR 60.593(c)] Federally Enforceable Through Title V Permit
134. An owner or operator may use the following provision in addition to 40 CFR 60.485(e): Equipment is in light liquid service if the percent evaporated is greater than 10 percent at 150 °C as determined by ASTM Method D86-78, 82, 90, 95, or 96. [40 CFR 60.593(d)] Federally Enforceable Through Title V Permit
135. Pumps in light liquid service and valves in gas/vapor and light liquid service within a procesic compounds of usually high molecular weight that consist of many repeated links, each link being a relatively light and simple molecule. [40 CFR 60.593(e)] Federally Enforceable Through Title V Permit
136. Equipment that is in vacuum service is excluded from the requirements of 40 CFR 60.482-2 to 40 CFR 60.482-10 if it is identified as required in 40 CFR 60.486(e)(5). [40 CFR 60.482-1(d)] Federally Enforceable Through Title V Permit
137. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
138. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
139. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
140. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
141. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
142. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

143. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
144. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
145. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
146. Compliance with permit conditions in the Title V permit shall be deemed compliance with 40 CFR 60 Subpart GGG. A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
147. Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NOx emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NOx emission limit listed in Rule 4320. [District Rule 4320]
148. Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

PERMIT UNIT: S-33-59-7

EXPIRATION DATE: 08/31/2007

SECTION: 28 TOWNSHIP: 29S RANGE: 27E

**EQUIPMENT DESCRIPTION:**

42 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H6 - AREA 2

## PERMIT UNIT REQUIREMENTS

---

1. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
2. Emission rates shall not exceed the following: PM10: 0.001 lb/MMBtu, SOx (as SO2): 0.214 lb/MMBtu, NOx (as NO2): 0.130 lb/MMBtu, VOC: 0.003 lb/MMBtu and CO: 47 ppmv @ 3% O2. [District NSR Rule] Federally Enforceable Through Title V Permit
3. Boiler shall operate as a replacement/emergency standby unit for the following primary units: boiler 81-H9 (S-33-348), boiler 81-H1 (S-33-17), heaters 9H1-4 (S-33-12), heaters 22H11-14 (S-33-53), and/or heater 20H11 (S-33-55). Simultaneous operation of the replacement/emergency standby unit and a primary unit shall not occur except for startup and shutdown of the primary unit. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
4. Boiler heat input shall not exceed 90 billion Btu in any calendar year and boiler shall not be operated for more than 720 hours in any calendar year. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
5. Boiler shall be either tuned at least once each calendar year in which it operates by a qualified technician in accordance with Rule 4304, or operated with exhaust oxygen concentration no greater than 3.00% by volume on a dry basis. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
6. Boiler shall be operated in accordance with the manufacturer's recommendations. [District Rule 4305] Federally Enforceable Through Title V Permit
7. Permittee shall maintain records of fuel higher heating value (hhv), monthly and annual fuel consumption, and hours of operation and shall make such records readily available for District inspection upon request for a period of five years. [District Rules 2520, 9.4.2, 4305 and 4351] Federally Enforceable Through Title V Permit
8. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
9. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NOx and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
10. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
11. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO2, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

12. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
13. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
14. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
15. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
16. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
17. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
18. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
19. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
20. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
21. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
22. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
23. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
24. Valves, threaded connections, and flanges shall not leak VOCs at a rate of more than three (3) drops per minute or leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking components of any component type does not exceed two (2) percent of the total number of components of that type. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

25. Pressure relief valves (PRVs) shall not leak VOCs in excess of 10,000 ppm above background when measured in the plane at the centroid of any atmospheric vent with an instrument calibrated with methane, provided the total number of leaking PRVs does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
26. Process drains shall not leak VOCs in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking process drains does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
27. The facility shall not use any valve, other than a valve on a product sampling line, a safety pressure relief valve, or a double block and bleeder valve, which is located at the end of a pipe or line containing VOCs unless such valve is sealed with a blind flange, plug, or cap; not including loading spouts and water drain valves. [District Rule 4451, 5.1.4] Federally Enforceable Through Title V Permit
28. Every leaking valve, flange, threaded connection, process drain and pressure relief valve shall be affixed with a record of inspection which shall bear a legible record of all inspections for at least a fifteen month period or coded with the records kept in a centralized location. [District Rule 4451, 5.1.5] Federally Enforceable Through Title V Permit
29. All valves, threaded connections and PRVs handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. If less than two (2) percent of the components of any component type, except PRVs, are found to leak during each five (5) consecutive quarterly inspections, the inspection frequency for that component type may be changed from quarterly to annual. If any annual inspection shows that two (2) percent or more of all of a specific component type subject to the prohibitions of this rule are leaking, then quarterly inspections of that component type shall be resumed. [District Rule 4451, 5.2.1] Federally Enforceable Through Title V Permit
30. All flanges and process drains handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every 12 months. [District Rule 4451, 5.2.2] Federally Enforceable Through Title V Permit
31. Within three (3) days after any pressure relief valve vents to the atmosphere, the operator shall inspect with a portable hydrogen detection instrument any such PRV and shall repair any leak. The inspection shall be accomplished by sampling for vapors with a portable hydrocarbon detection instrument and by visual examination for indication of liquid leakage. [District Rule 4451, 5.2.3 & 5.2.4] Federally Enforceable Through Title V Permit
32. Any leaking valve, PRV, threaded connection, flange and process drain shall be identified by affixing a weatherproof, readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until repair and reinspection documents compliance with the requirements of Rule 4451 (Amended December 17, 1992). [District Rule 4451, 5.2.5] Federally Enforceable Through Title V Permit
33. Each leak detected shall be recorded on the inspection record along with the date of inspection, component identification number, actual instrument reading, and the inspector's initials. [District Rule 4451, 5.2.6] Federally Enforceable Through Title V Permit
34. Within 15 days after detection any valve, pressure relief valve, flange, threaded connection, or process drain found to leak shall be repaired or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25. [District Rule 4451, 5.3.1] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

35. If a valve, pressure relief valve, flange, threaded connection, or process drain is found to leak and cannot be repaired to a no-leak condition without requiring the shutdown of essential refinery operations, the following repair schedule shall apply: (a) If the leak rate is less than ten (10) drops per minute the APCO shall be notified of the expected date of repair, not to exceed one (1) year or the date of the next process unit turnaround whichever is less for each valve, pressure relief valve, flange, threaded connection, and process drain, and the actual date of repair for each valve, pressure relief valve, flange, threaded connection, and process drain. (b) If the leak rate is greater than nine (9) drops per minute or 10,000 ppm measured one (1) centimeter from the source, the APCO shall be notified of an emergency repair, within 15 days after detection, to reduce the leak to less than ten (10) drops per minute or 10,000 ppm as methane measured one (1) centimeter from the source, or the venting, within 30 days after detection, of the emission to a flare or vapor control system that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25, or a demonstration, with 30 days after detection, that the repair schedules are infeasible. The demonstration shall include documentation that the component is an essential device and that no vapor control device that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25 exists. (c) Repair an essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4451, 5.3.2] Federally Enforceable Through Title V Permit
36. Analysis of halogenated exempt compounds shall be by ARB Method 422. [District Rule 4451, 6.3.1] Federally Enforceable Through Title V Permit
37. Efficiency of VOC destruction device shall be measured by EPA Method 25, 25a, or 25b, as applicable. [District Rule 4451, 6.3.2] Federally Enforceable Through Title V Permit
38. The TVP of organic liquids, including light crude and petroleum distillates, shall be measured using Reid vapor pressure ASTM Method No. D-323 modified by maintaining the hot water bath at storage temperature. Where storage temperature is above 1000F, TVP may be determined by Reid Vapor pressure at 1000F and ARB approved calculations. Organic liquids listed in Rule 4451 (Amended December 17, 1992), Table 1 shall be deemed to be in compliance with the appropriate vapor pressure limits for the material, provided actual operating temperature does not exceed the corresponding maximum temperature listed. [District Rule 4451, 6.3.3] Federally Enforceable Through Title V Permit
39. Copies of the inspection log shall be retained by the operator for a minimum of five (5) years after the date of an entry and made available upon request to District personnel. [District Rules 4451, 6.2.2, 6.2.3, and 2520, 9.4.2] Federally Enforceable Through Title V Permit
40. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall be inspected for leaks with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. [District Rule 4452, 5.1.1] Federally Enforceable Through Title V Permit
41. Any pump shall be visually inspected weekly. Whenever volatile organic liquids are observed dripping from a pump seal, the seal shall be checked within three (3) day with a portable hydrocarbon detection instrument in accordance with EPA Method 21 to determine if a leak is present or the drippage stopped with the same time frame. [District Rule 4452, 5.1.2] Federally Enforceable Through Title V Permit
42. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall not leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter from the potential source with an instrument calibrated with methane or the drip liquid VOCs at a rate of more than three (3) drops per minute. [District Rule 4452, 5.1.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

43. Any person operating a pump or compressor which handles a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which is leaking shall repair the leaking device within 15 calendar days. If the leaking device is essential and cannot be repaired within 15 days after detection, one (1) of the following actions shall be taken: (a) replace the leaking device and inspect for leaks within three days after detection, (b) vent emissions to vapor recovery device that is at least 94 percent efficient as measured by EPA Method 25, or to a flare that satisfies the requirements of 40 CFR 60.18, or (c) repair the essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4452, 5.2.1] Federally Enforceable Through Title V Permit
44. A readily visible identification, in the form of a weather-proof tag shall be attached to any pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which leaks. Pumps or compressors which handle a VOC, or any associated seal fluid systems which circulates a fluid through or between seals on process pumps or compressors, to be repaired at the next shutdown shall be tagged, marked or coded in a manner easily identifiable by District personnel. [District Rule 4452, 5.2.2] Federally Enforceable Through Title V Permit
45. Sampling of a seal shall be performed one (1) centimeter from the outer end of the shaft seal interface or at a distance of one (1) centimeter of any other point on the seal which could leak. [District Rule 4452, 6.3.1.2] Federally Enforceable Through Title V Permit
46. Sampling of atmospheric vents on pump and compressor fluid systems shall be measured in the plane of the opening of the vent at the centrad. [District Rule 4452, 6.3.1.3] Federally Enforceable Through Title V Permit
47. Each operator shall maintain an inspection log containing, at a minimum, the following: name, location, type of components, and description of any unit where leaking components are found; date of leak detection, emission level (ppm) of leak, and method of detection; date and emission level of recheck after leak is repaired; identification of leaks that cannot be repaired until next process unit turnaround; total number of components inspected, and total number and percentage of leaking components found for each component type. [District Rules 4451, 6.2.1 & 4452, 6.2.1] Federally Enforceable Through Title V Permit
48. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
49. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
50. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
51. Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NO<sub>x</sub> emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NO<sub>x</sub> emission limit listed in Rule 4320. [District Rule 4320]
52. Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320]

These terms and conditions are part of the Facility-wide Permit to Operate.

# San Joaquin Valley Air Pollution Control District

**PERMIT UNIT:** S-33-61-7

**EXPIRATION DATE:** 08/31/2007

**SECTION:** 28 **TOWNSHIP:** 29S **RANGE:** 27E

**EQUIPMENT DESCRIPTION:**

78.8 MMBTU/HR NATURAL GAS/REFINERY GAS FIRED BOILER #81-H8 - AREA 2

## PERMIT UNIT REQUIREMENTS

---

1. Permittee shall meet all applicable requirements of NSPS Subparts A and J. [NSPS 40 CFR Part 60, Subparts A & J] Federally Enforceable Through Title V Permit
2. Emission rates shall not exceed the following: PM10: 0.001 lb/MMBtu, SO<sub>x</sub> (as SO<sub>2</sub>): 0.214 lb/MMBtu, NO<sub>x</sub> (as NO<sub>2</sub>): 0.130 lb/MMBtu, VOC: 0.003 lb/MMBtu and CO: 47 ppmv @ 3% O<sub>2</sub>. [District NSR Rule] Federally Enforceable Through Title V Permit
3. Boiler shall operate as a replacement/emergency standby unit for the following primary units: boiler 81-H9 (S-33-348), boiler 81-H1 (S-33-17), heaters 9H1-4 (S-33-12), heaters 22H11-14 (S-33-53), and/or heater 20H11 (S-33-55). Simultaneous operation of the replacement/emergency standby unit and a primary unit shall not occur except for startup and shutdown of the primary unit. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
4. Boiler heat input shall not exceed 90 billion Btu in any calendar year and boiler shall not be operated for more than 720 hours in any calendar year. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
5. Boiler shall be either tuned at least once each calendar year in which it operates by a qualified technician in accordance with Rule 4304, or operated with exhaust oxygen concentration no greater than 3.00% by volume on a dry basis. [District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
6. Boiler shall be operated in accordance with the manufacturer's recommendations. [District Rule 4305] Federally Enforceable Through Title V Permit
7. Permittee shall maintain records of fuel higher heating value (hhv), monthly and annual fuel consumption, and hours of operation and shall make such records readily available for District inspection upon request for a period of two years. [District Rules District Rules 4305 and 4351] Federally Enforceable Through Title V Permit
8. The operator shall maintain all records of required monitoring data and support information for inspection at any time for a period of five years. [District Rule 2520, 9.4.2] Federally Enforceable Through Title V Permit
9. Emissions for this unit shall be calculated using the arithmetic mean, pursuant to District Rule 1081(amended December 16, 1993), of 3 thirty-minute test runs for NO<sub>x</sub> and CO. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
10. Copies of all fuel invoices, gas purchase contracts, supplier certifications, and test results to determine compliance with the conditions of this permit shall be maintained. The operator shall record daily amount and type(s) of fuel(s) combusted and all dates on which unit is fired on any noncertified fuel. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
11. Particulate matter emissions shall not exceed 0.1 grain/dscf, 0.1 grain/dscf calculated to 12% CO<sub>2</sub>, nor 10 lb/hr. [District Rules 4201, 3.1 and 4301, 5.1 and 5.2.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

12. Emissions of sulfur compounds from this unit shall not exceed 200 lb per hour, calculated as SO<sub>2</sub>. [District Rule 2520, 9.3.2 and District Rule 4301, 5.2.1] Federally Enforceable Through Title V Permit
13. If the unit is fired on noncertified gaseous fuel and compliance with SO<sub>x</sub> emission limits is achieved through fuel sulfur content limitations, then the sulfur content of the gaseous fuel being fired in the unit shall be determined using ASTM D 1072, D 3031, D 4084, D 3246 or grab sample analysis by GC-FPD/TCD performed in the laboratory. [District Rule 2520, 9.3.2] Federally Enforceable Through Title V Permit
14. If fuel analysis is used to demonstrate compliance with the conditions of this permit, the fuel higher heating value for each fuel shall be certified by third party fuel supplier or determined by: ASTM D 1826 or D 1945 in conjunction with ASTM D 3588 for gaseous fuels. [District Rule 2520, 9.3.2; 4305, 6.2.1; and 4351, 6.2.1] Federally Enforceable Through Title V Permit
15. The concentration of sulfur compounds in the exhaust from this unit shall not exceed 0.2% by volume as measured on a dry basis over a 15 minute period (Kern County Rule 407). [District Rule 4801 and Kern County Rule 407] Federally Enforceable Through Title V Permit
16. Nitrogen oxide (NO<sub>x</sub>) emission concentrations in ppmv shall be referenced at dry stack gas conditions, and shall be calculated to 3.00 percent by volume stack gas oxygen and averaged over 60 minutes, and lb/MMBtu rates shall be calculated as lb NO<sub>2</sub>/MMBtu of heat input (hhv). [District Rule 2520, 9.3.2, 4305, 5.0, 8.2 and/or 4351, 8.1] Federally Enforceable Through Title V Permit
17. Nitrogen oxide (NO<sub>x</sub>) emissions shall not exceed 140 lb/hr, calculated as NO<sub>2</sub>. [District Rules 4301, 5.2.2] Federally Enforceable Through Title V Permit
18. The operator shall not burn in any fuel gas combustion device any fuel that contains hydrogen sulfide (H<sub>2</sub>S) in excess of 0.1 gr/dscf (230 mg/dscm) [40 CFR 60.104(a)(1)] Federally Enforceable Through Title V Permit
19. For fuel gas combustion devices, a continuous emissions monitoring system shall be installed, calibrated, operated, and reported according to EPA guidelines as specified under 40 CFR 60.105(a)(3). CEM results shall be calculated on a rolling three (3) hour basis. [40 CFR 60, 60.105(a)(3)] Federally Enforceable Through Title V Permit
20. For fuel gas combustion devices, operator shall report all rolling 3-hour periods during which the average concentration of H<sub>2</sub>S as measured by the H<sub>2</sub>S continuous monitoring system exceeds 0.10 gr/dscf (230 mg/dscm) or during which the average concentration of SO<sub>2</sub> as measured by the SO<sub>2</sub> continuous monitoring system exceeds 20 ppm (dry basis, zero percent excess air). [40 CFR 60.105(e)(3)] Federally Enforceable Through Title V Permit
21. Operator shall determine compliance with the H<sub>2</sub>S standard using EPA Methods 11, 15, 15A, or 16. [40 CFR 60.106(e)] Federally Enforceable Through Title V Permit
22. For any periods for which sulfur dioxide or oxides emissions data are not available, the operator shall submit a signed statement indicating if any changes were made in operation of the emission control system during the period of data unavailability which could affect the ability of the system to meet the applicable emission limit. Operations of the control system and affected facility during periods of data unavailability are to be compared with operation of the control system and affected facility before and following the period of data unavailability. [40 CFR 60.107(d)] Federally Enforceable Through Title V Permit
23. The owner or operator shall submit the reports required under this subpart to the District semiannually for each six-month period. All semiannual reports shall be postmarked by the 30th day following the end of each six-month period. The owner or operator shall submit a signed statement certifying the accuracy and completeness of the information contained in the report. [40 CFR 60.107(e) and 60.107(f)] Federally Enforceable Through Title V Permit
24. Valves, threaded connections, and flanges shall not leak VOCs at a rate of more than three (3) drops per minute or leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking components of any component type does not exceed two (2) percent of the total number of components of that type. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE

These terms and conditions are part of the Facility-wide Permit to Operate.

25. Pressure relief valves (PRVs) shall not leak VOCs in excess of 10,000 ppm above background when measured in the plane at the centroid of any atmospheric vent with an instrument calibrated with methane, provided the total number of leaking PRVs does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
26. Process drains shall not leak VOCs in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter of the potential source with an instrument calibrated with methane, provided the total number of leaking process drains does not exceed two (2) percent. [District Rule 4451, 5.1.1 & 5.1.2] Federally Enforceable Through Title V Permit
27. The facility shall not use any valve, other than a valve on a product sampling line, a safety pressure relief valve, or a double block and bleeder valve, which is located at the end of a pipe or line containing VOCs unless such valve is sealed with a blind flange, plug, or cap; not including loading spouts and water drain valves. [District Rule 4451, 5.1.4] Federally Enforceable Through Title V Permit
28. Every leaking valve, flange, threaded connection, process drain and pressure relief valve shall be affixed with a record of inspection which shall bear a legible record of all inspections for at least a fifteen month period or coded with the records kept in a centralized location. [District Rule 4451, 5.1.5] Federally Enforceable Through Title V Permit
29. All valves, threaded connections and PRVs handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. If less than two (2) percent of the components of any component type, except PRVs, are found to leak during each five (5) consecutive quarterly inspections, the inspection frequency for that component type may be changed from quarterly to annual. If any annual inspection shows that two (2) percent or more of all of a specific component type subject to the prohibitions of this rule are leaking, then quarterly inspections of that component type shall be resumed. [District Rule 4451, 5.2.1] Federally Enforceable Through Title V Permit
30. All flanges and process drains handling VOCs shall be inspected for leakage with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every 12 months. [District Rule 4451, 5.2.2] Federally Enforceable Through Title V Permit
31. Within three (3) days after any pressure relief valve vents to the atmosphere, the operator shall inspect with a portable hydrogen detection instrument any such PRV and shall repair any leak. The inspection shall be accomplished by sampling for vapors with a portable hydrocarbon detection instrument and by visual examination for indication of liquid leakage. [District Rule 4451, 5.2.3 & 5.2.4] Federally Enforceable Through Title V Permit
32. Any leaking valve, PRV, threaded connection, flange and process drain shall be identified by affixing a weatherproof, readily visible tag bearing the date on which the leak is detected. The tag shall remain in place until repair and reinspection documents compliance with the requirements of Rule 4451 (Amended December 17, 1992). [District Rule 4451, 5.2.5] Federally Enforceable Through Title V Permit
33. Each leak detected shall be recorded on the inspection record along with the date of inspection, component identification number, actual instrument reading, and the inspector's initials. [District Rule 4451, 5.2.6] Federally Enforceable Through Title V Permit
34. Within 15 days after detection any valve, pressure relief valve, flange, threaded connection, or process drain found to leak shall be repaired or vented to a flare satisfying the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25. [District Rule 4451, 5.3.1] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

35. If a valve, pressure relief valve, flange, threaded connection, or process drain is found to leak and cannot be repaired to a no-leak condition without requiring the shutdown of essential refinery operations, the following repair schedule shall apply: (a) If the leak rate is less than ten (10) drops per minute the APCO shall be notified of the expected date of repair, not to exceed one (1) year or the date of the next process unit turnaround whichever is less for each valve, pressure relief valve, flange, threaded connection, and process drain, and the actual date of repair for each valve, pressure relief valve, flange, threaded connection, and process drain. (b) If the leak rate is greater than nine (9) drops per minute or 10,000 ppm measured one (1) centimeter from the source, the APCO shall be notified of an emergency repair, within 15 days after detection, to reduce the leak to less than ten (10) drops per minute or 10,000 ppm as methane measured one (1) centimeter from the source, or the venting, within 30 days after detection, of the emission to a flare or vapor control system that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25, or a demonstration, with 30 days after detection, that the repair schedules are infeasible. The demonstration shall include documentation that the component is an essential device and that no vapor control device that satisfies the requirements of 40 CFR 60.18 or to a vapor control device that is at least 95 percent efficient as measured by EPA Method 25 exists. (c) Repair an essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4451, 5.3.2] Federally Enforceable Through Title V Permit
36. Analysis of halogenated exempt compounds shall be by ARB Method 422. [District Rule 4451, 6.3.1] Federally Enforceable Through Title V Permit
37. Efficiency of VOC destruction device shall be measured by EPA Method 25, 25a, or 25b, as applicable. [District Rule 4451, 6.3.2] Federally Enforceable Through Title V Permit
38. The TVP of organic liquids, including light crude and petroleum distillates, shall be measured using Reid vapor pressure ASTM Method No. D-323 modified by maintaining the hot water bath at storage temperature. Where storage temperature is above 1000F, TVP may be determined by Reid Vapor pressure at 1000F and ARB approved calculations. Organic liquids listed in Rule 4451 (Amended December 17, 1992), Table 1 shall be deemed to be in compliance with the appropriate vapor pressure limits for the material, provided actual operating temperature does not exceed the corresponding maximum temperature listed. [District Rule 4451, 6.3.3] Federally Enforceable Through Title V Permit
39. Copies of the inspection log shall be retained by the operator for a minimum of five (5) years after the date of an entry and made available upon request to District personnel. [District Rules 4451, 6.2.2, 6.2.3, and 2520, 9.4.2] Federally Enforceable Through Title V Permit
40. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall be inspected for leaks with a portable hydrocarbon detection instrument in accordance with EPA Method 21 at least once every three (3) months. [District Rule 4452, 5.1.1] Federally Enforceable Through Title V Permit
41. Any pump shall be visually inspected weekly. Whenever volatile organic liquids are observed dripping from a pump seal, the seal shall be checked within three (3) day with a portable hydrocarbon detection instrument in accordance with EPA Method 21 to determine if a leak is present or the drippage stopped with the same time frame. [District Rule 4452, 5.1.2] Federally Enforceable Through Title V Permit
42. Pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors shall not leak in excess of 10,000 ppm above background when measured at a distance of one (1) centimeter from the potential source with an instrument calibrated with methane or the drip liquid VOCs at a rate of more than three (3) drops per minute. [District Rule 4452, 5.1.3] Federally Enforceable Through Title V Permit

PERMIT UNIT REQUIREMENTS CONTINUE ON NEXT PAGE  
These terms and conditions are part of the Facility-wide Permit to Operate.

43. Any person operating a pump or compressor which handles a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which is leaking shall repair the leaking device within 15 calendar days. If the leaking device is essential and cannot be repaired within 15 days after detection, one (1) of the following actions shall be taken: (a) replace the leaking device and inspect for leaks within three days after detection, (b) vent emissions to vapor recovery device that is at least 94 percent efficient as measured by EPA Method 25, or to a flare that satisfies the requirements of 40 CFR 60.18, or (c) repair the essential device to eliminate the leak during the next process unit shutdown, but in no case later than one (1) year from the date of the original leak detection. [District Rule 4452, 5.2.1] Federally Enforceable Through Title V Permit
44. A readily visible identification, in the form of a weather-proof tag shall be attached to any pumps or compressors which handle a VOC or any associated seal fluid system which circulates a fluid through or between seals on process pumps or compressors which leaks. Pumps or compressors which handle a VOC, or any associated seal fluid systems which circulates a fluid through or between seals on process pumps or compressors, to be repaired at the next shutdown shall be tagged, marked or coded in a manner easily identifiable by District personnel. [District Rule 4452, 5.2.2] Federally Enforceable Through Title V Permit
45. Sampling of a seal shall be performed one (1) centimeter from the outer end of the shaft seal interface or at a distance of one (1) centimeter of any other point on the seal which could leak. [District Rule 4452, 6.3.1.2] Federally Enforceable Through Title V Permit
46. Sampling of atmospheric vents on pump and compressor fluid systems shall be measured in the plane of the opening of the vent at the centrad. [District Rule 4452, 6.3.1.3] Federally Enforceable Through Title V Permit
47. Each operator shall maintain an inspection log containing, at a minimum, the following: name, location, type of components, and description of any unit where leaking components are found; date of leak detection, emission level (ppm) of leak, and method of detection; date and emission level of recheck after leak is repaired; identification of leaks that cannot be repaired until next process unit turnaround; total number of components inspected, and total number and percentage of leaking components found for each component type. [District Rules 4451, 6.2.1 & 4452, 6.2.1] Federally Enforceable Through Title V Permit
48. Operators shall not depressurize any vessel containing VOCs unless the process unit turnaround is accomplished by employing one of the following operating procedures: The organic vapors shall either be recovered, added to the refinery fuel gas system and combusted; or controlled and piped to an appropriate firebox or incinerated for combustion; or flared, until the pressure within the process vessel is as close to atmospheric pressure as is possible. All process vessels shall be depressurized into the control facilities to less than 1020 mm Hg (5 psig) before venting/opening to atmosphere. All organic compounds which emerge from a refinery process vessel during the purging of said vessel and which otherwise would be emitted to the atmosphere shall be either directed to a flare or incinerator or shall be used for fuel until such disposition of emissions is not technically feasible or is less safe than atmospheric venting. [District Rule 4454, 4.0] Federally Enforceable Through Title V Permit
49. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4451 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
50. Compliance with permit conditions in the Title V permit shall be deemed compliance with SJVUAPCD Rule 4452 (Amended December 17, 1992). A permit shield is granted from this requirement. [District Rule 2520, 13.2] Federally Enforceable Through Title V Permit
51. Pursuant to Rule 4320, beginning in 2010 the operator shall pay an annual emission fee to the District for NO<sub>x</sub> emissions from this unit for the previous calendar year. Payments are due by July 1 of each year. Payments shall continue annually until either the unit is permanently removed from service in the District or the operator demonstrates compliance with the applicable NO<sub>x</sub> emission limit listed in Rule 4320. [District Rule 4320]
52. Permittee shall maintain records of annual heat input (MMBtu) for this unit on a calendar year basis. Such records shall be maintained and retained on-site for a minimum of five (5) years, and shall be made available for District inspection upon request. [District Rules 1070 and Rule 4320]

These terms and conditions are part of the Facility-wide Permit to Operate.