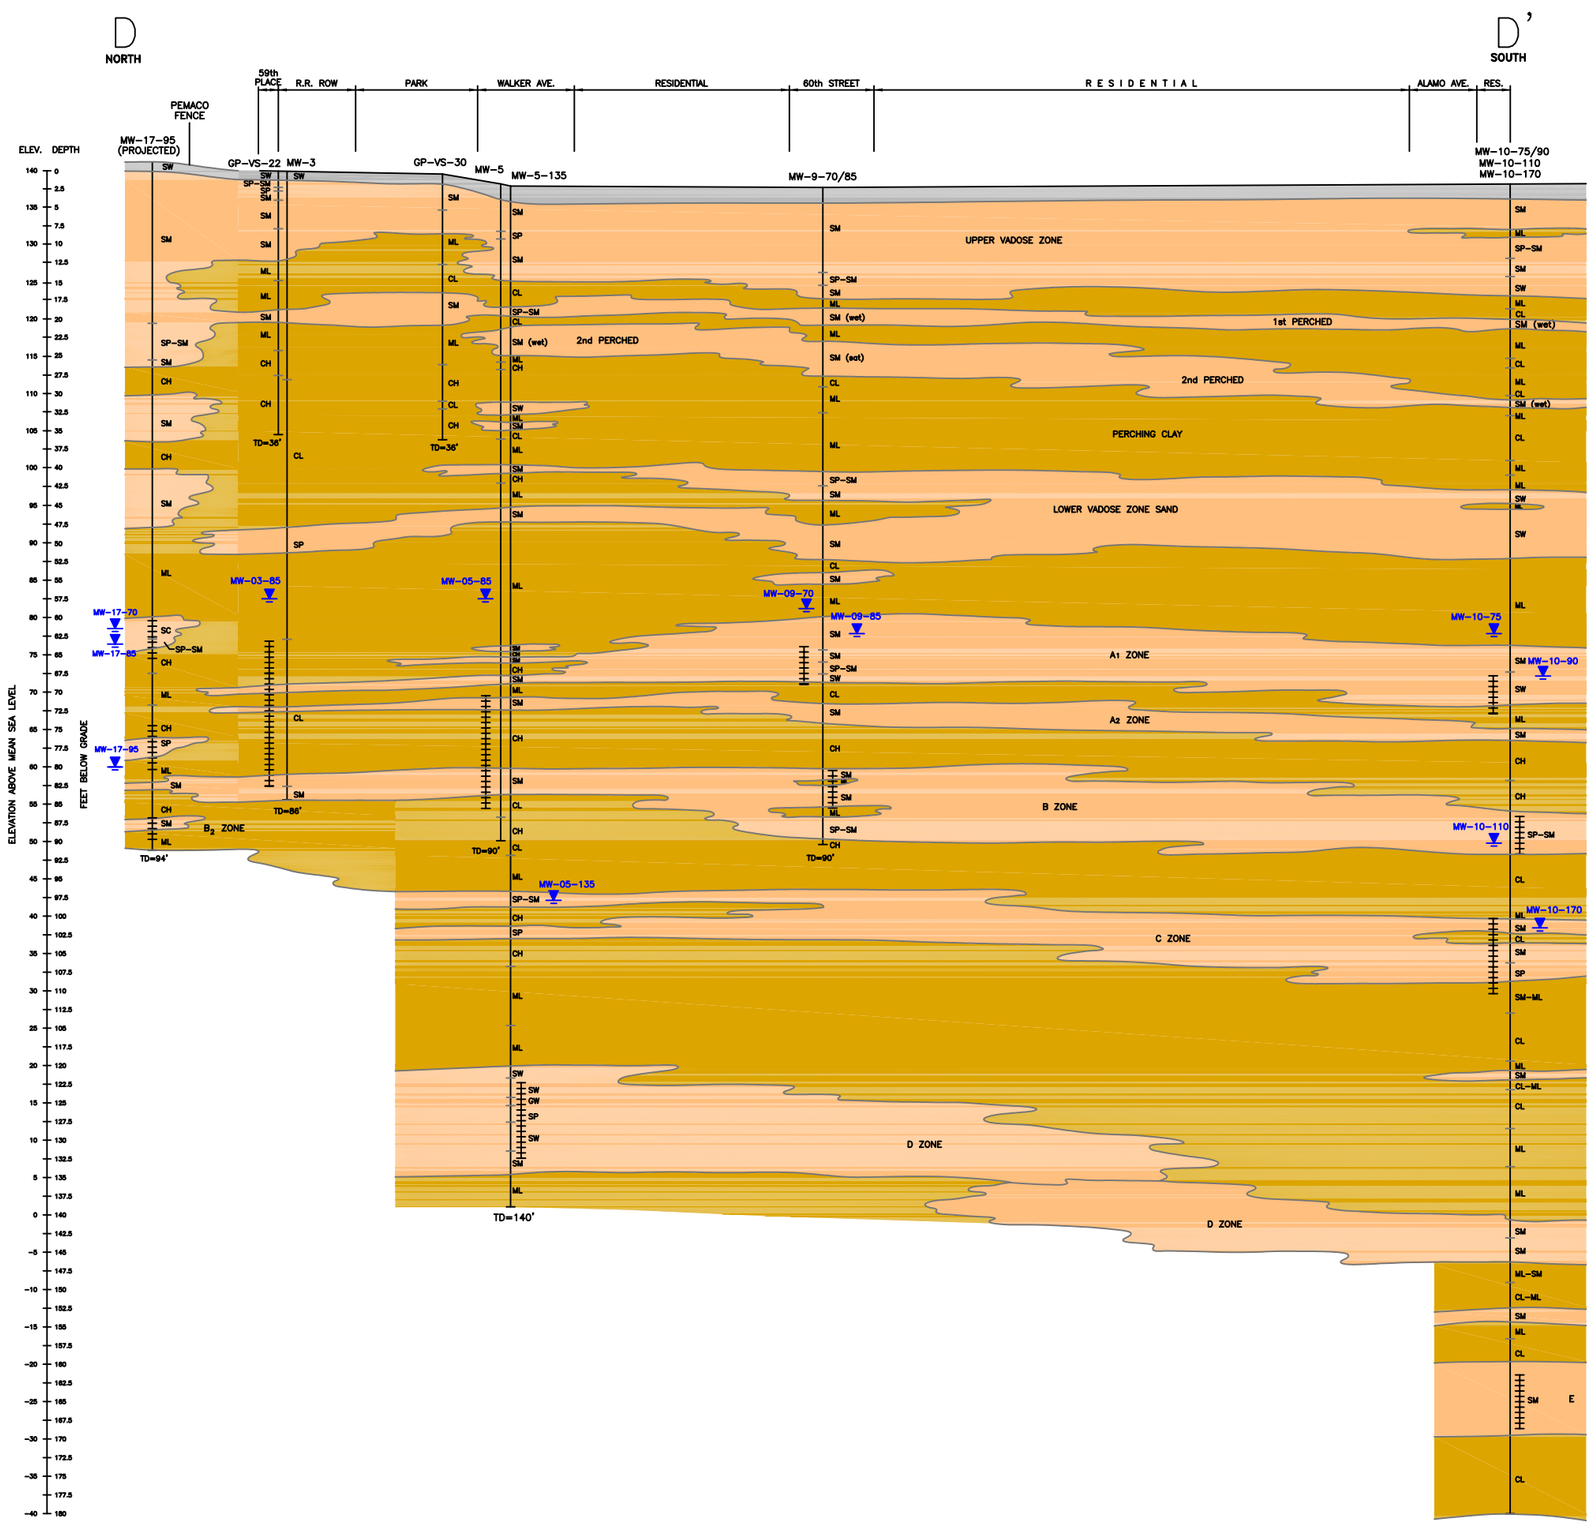

LEGEND

- WELL SCREEN INTERVAL
- COARSE-GRAINED LITHOSOMES
- FINE-GRAINED LITHOSOMES
- FILL MATERIAL
- MW-10-75 — POTENTIOMETRIC SURFACE LEVEL WITH CORRESPONDING WELL I.D.

NOTES:

1.) GROUNDWATER DATA FROM WELLS GAUGED 5/21/2001, EXCEPT FOR MW-17-70, MW-17-85 AND MW-17-95, WHICH WERE GAUGED 1/7/2002.

2.) 'PROJECTED' = ACTUAL WELL LOCATION IS OFFSET FROM CROSS SECTION LINE. THE LITHOLOGY IS 'PRJECTED' ONTO THE CROSS SECTION.

3.) LITHOLOGIC ACRONYMS:

- SP = POORLY GRADED SANDS
- SW = WELL GRADED SANDS
- SM = SILTY SANDS
- SP-SM = POORLY GRADED SANDS WITH SILT
- SW-SP = WELL GRADED SANDS WITH SILT
- ML = SILT
- CH = FAT CLAY (HIGHLY PLASTIC CLAY)
- CL = LEAN CLAY (LOW PLASTICITY CLAY)

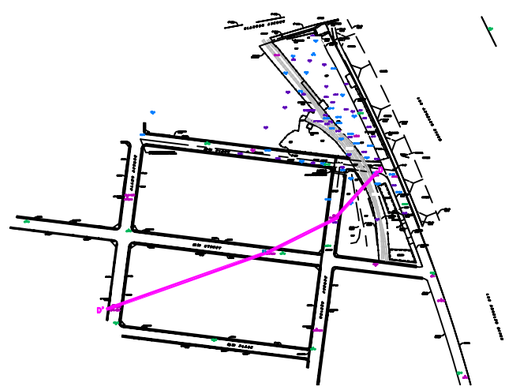

CROSS SECTION INDEX MAP

10
0 60

APPROX. SCALE IN FEET
6x VERTICAL EXAGGERATION

DATE:	FILE NAME:	APPROVED BY:
1/13/2003	PEM-D-SEC.DWG	

CROSS SECTION D-D'

PEMACO SUPERFUND SITE
5050 EAST SLAUSON AVENUE
MAYWOOD, CALIFORNIA

TN & A — T N & Assoclates, Inc.
Engineering and Science

FIGURE
5C