



# South Coast Air Quality Management District

21865 Copley Drive, Diamond Bar, CA 91765-4178  
(909) 396-2000 • www.aqmd.gov

January 24, 2014

Ms. Yijin Wang  
Air Quality Manager  
Kinder Morgan Energy Partners, L.P.  
1100 Town and Country Road  
Orange, California 92868

Dear Ms. Wang:

RE: Facility ID # 800279  
SFPP, LP (Orange Terminal)  
1350 N. Main Street  
Orange, CA 92667

Enclosed are the revised Title Page, Table of Contents, Section D, and Section H of your Title V Facility Permit. The revised sections reflect the changes as follows:

Section D – Permit to Operate Added

<i>Application No.</i>	<i>Permit to Operate No.</i>	<i>Equipment (Description of Modification)</i>
531070	G29532	ALCOHOLS BULK UNLOADING <ul style="list-style-type: none"> <li>• Add vapor balance</li> </ul>

Section D – Permit to Operate Removed (superceded by new permit)

<i>Application No.</i>	<i>Permit to Operate No.</i>	<i>Equipment</i>
366667	F73531	ALCOHOLS BULK UNLOADING

Section H – Permit to Construct Removed (superceded by new permit)

<i>Application No.</i>	<i>Equipment</i>
501811	BULK LOADING, ETHANOL

This revision is covered under A/N 531071 and is a “de minimus significant permit revision” to the Title V permit previously dated December 13, 2013. No comments were received during the EPA review period which began about November 19, 2013.

Ms. Yijin Wang  
SFPP, LP  
Orange Terminal 800279


- 2 -

January 24, 2014

Please review the attached sections carefully. Insert the enclosed sections into your Title V Facility Permit and discard the earlier versions.

The operation of your facility is bound by the conditions and/or requirements stated in the facility Permit to Operate. If you determine that there are administrative errors, or if you have any questions concerning changes to your permit, please contact Ms. Linda Dejbakhsh, Air Quality Engineer, at (909) 396-2614 within 30 days of the receipt of your permit.

Sincerely,

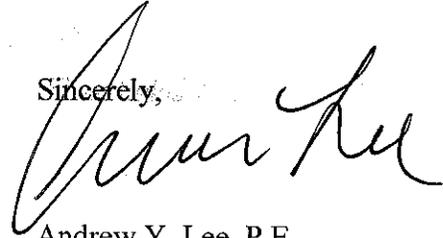

Andrew Y. Lee, P.E.  
Senior Manager  
Engineering and Compliance Permitting

AYL:CDT:LLD  
Enclosures

cc: Gerardo Rios, EPA Region IX  
Compliance  
Central File  
TV Application File (A/N 531071)  
A/N 531070



## FACILITY PERMIT TO OPERATE


**SFPP, L.P. (NSR USE ONLY)  
1350 N MAIN ST  
ORANGE, CA 92867**

### NOTICE

IN ACCORDANCE WITH RULE 206, THIS PERMIT TO OPERATE OR A COPY THEREOF MUST BE KEPT AT THE LOCATION FOR WHICH IT IS ISSUED.

THIS PERMIT DOES NOT AUTHORIZE THE EMISSION OF AIR CONTAMINANTS IN EXCESS OF THOSE ALLOWED BY DIVISION 26 OF THE HEALTH AND SAFETY CODE OF THE STATE OF CALIFORNIA OR THE RULES OF THE SOUTH COAST AIR QUALITY MANAGEMENT DISTRICT. THIS PERMIT SHALL NOT BE CONSTRUED AS PERMISSION TO VIOLATE EXISTING LAWS, ORDINANCES, REGULATIONS OR STATUTES OF ANY OTHER FEDERAL, STATE OR LOCAL GOVERNMENTAL AGENCIES.

Barry R. Wallerstein, D. Env.  
EXECUTIVE OFFICER

By   
Mohsen Nazemi, P.E.  
Deputy Executive Officer  
Engineering & Compliance



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

TABLE OF CONTENTS

Section	Description	Revision #	Date Issued
A	Facility Information	0	01/26/2009
B	RECLAIM Annual Emission Allocation	0	01/26/2009
C	Facility Plot Plan	TO BE DEVELOPED	
D	Facility Description and Equipment Specific Conditions	3	01/24/2014
E	Administrative Conditions	0	01/26/2009
F	RECLAIM Monitoring and Source Testing Requirements	0	01/26/2009
G	Recordkeeping and Reporting Requirements for RECLAIM Sources	0	01/26/2009
H	Permit To Construct and Temporary Permit to Operate	2	01/24/2014
I	Compliance Plans & Schedules	0	01/26/2009
J	Air Toxics	0	01/26/2009
K	Title V Administration	0	01/26/2009
Appendix			
A	NOx and SOx Emitting Equipment Exempt From Written Permit Pursuant to Rule 219	0	01/26/2009
B	Rule Emission Limits	0	01/26/2009



---

**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

---

**Facility Equipment and Requirements**  
**(Section D)**

This section consists of a table listing all permitted equipment at the facility, facility wide requirements, all individual Permits to Operate issued to various equipment at the facility, and Rule 219-exempt equipment subject to source-specific requirements. Each permit and Rule 219-exempt equipment will list operating conditions including periodic monitoring requirements, and applicable emission limits and requirements. Also included are the rule origin and authority of each emission limit and permit condition.



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMITTED EQUIPMENT LIST**

THE FOLLOWING IS A LIST OF ALL PERMITS TO OPERATE AT THIS FACILITY:

Application Number	Permit to Operate Number	Equipment Description	Page Number
205836	D13409	WASTE WATER SEPARATION	4
209559	D16744	STORAGE TANK, UNDERGROUND SUMP (D-102)	5
319115	F3446	STORAGE TANK, FX RF, MISC ORGANIC MATERIALS (OR-10)	6
442110	F92218	STORAGE TANK W/EXT FLOAT ROOF TANK GASOLINE (OR-9)	7
444799	F77344	STORAGE W/EXT FLOAT ROOF TANK GASOLINE (OR-1)	8
444800	F77345	STORAGE W/EXT FLOAT ROOF TANK GASOLINE (OR-2)	9
444801	F77346	STORAGE W/EXT FLOAT ROOF TANK GASOLINE (OR-5)	10
444802	F77347	STORAGE W/EXT FLOAT ROOF TANK GASOLINE (OR-3)	11
444803	F77348	STORAGE W/EXT FLOAT ROOF TANK GASOLINE (OR-4)	12
459635	F98622	STORAGE FX RF W/INT FLT, (OR-8)	13
477567	G7392	STORAGE TANK FX RF W/INT FLT, DENATURED ETHANOL (OR-7)	15
482011	G28981	VAPOR RECOVERY SYSTEM, AFTERBURNER	17
482012	G28983	BULK LOAD/UNLOADING RACK NO. 1	19
482013	G28984	BULK LOAD/UNLOADING RACK NO. 2	21
511411	G28985	STORAGE W/EXT FLOAT ROOF TANK (OR-6)	23
524810	G28982	CRUDE OIL/GAS/WATER/SEPARATION SYSTEM	24
531070	G29532	ALCOHOLS BULK UNLOADING	26

**NOTE:** ANY APPLICATIONS THAT ARE STILL BEING PROCESSED AND HAVE NOT BEEN ISSUED PERMITS TO CONSTRUCT OR PERMITS TO OPERATE WILL NOT BE FOUND IN THIS TITLE V PERMIT



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**FACILITY WIDE CONDITION(S)**

**Condition(s):**

1. EXCEPT FOR OPEN ABRASIVE BLASTING OPERATIONS, THE OPERATOR SHALL NOT DISCHARGE INTO THE ATMOSPHERE FROM ANY SINGLE SOURCE OF EMISSIONS WHATSOEVER ANY AIR CONTAMINANT FOR A PERIOD OR PERIODS AGGREGATING MORE THAN THREE MINUTES IN ANY ONE HOUR WHICH IS:
  - A. AS DARK OR DARKER IN SHADE AS THAT DESIGNATED NO. 1 ON THE RINGELMANN CHART, AS PUBLISHED BY THE UNITED STATES BUREAU OF MINES; OR
  - B. OF SUCH OPACITY AS TO OBSCURE AN OBSERVER'S VIEW TO A DEGREE EQUAL TO OR GREATER THAN DOES SMOKE DESCRIBED IN SUBPARAGRAPH (A) OF THIS CONDITION.  
[RULE 401]
2. MATERIAL SAFETY DATA SHEETS FOR ALL COATINGS AND SOLVENTS USED AT THIS FACILITY SHALL BE KEPT CURRENT AND MADE AVAILABLE TO DISTRICT PERSONNEL UPON REQUEST.  
[RULE 109, 1303(b)(2)-OFFSET]
3. THIS FACILITY IS SUBJECT TO THE MINOR SOURCE REGULATION OF 40 CFR 63 SUBPART R.  
[40 CFR 63 SUBPART R]
4. THE SULFUR CONTENT OF NATURAL GAS UTILIZED AT THIS FACILITY SHALL NOT EXCEED 16 PPM BY VOLUME.  
[RULE 431.1]
5. THE SULFUR CONTENT OF DIESEL FUEL UTILIZED IN ANY ENGINE AT THIS FACILITY SHALL NOT EXCEED 15 PPM BY WEIGHT.  
[RULE 431.2]
6. THIS FACILITY SHALL COMPLY WITH THE APPLICABLE REQUIREMENTS OF 40 CFR 63 SUBPART BBBBBB.  
[40 CFR 63 SUBPART BBBBBB]
7. THIS FACILITY SHALL COMPLY WITH THE APPLICABLE REQUIREMENTS OF RULE 1173.  
[RULE 1173]



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

Permit No. D13409  
A/N 205836

**Equipment Description:**

**OIL/WATER SEPARATOR SYSTEM CONSISTING OF:**

1. OIL WATER SEPARATOR D106, GRAVITY TYPE, , FIXED COVER AND ENCLOSED, 3-TIER, 750 GALLON CAPACITY.
2. SUMP TANK D108, UNDERGROUND, 8000 GALLONS CAPACITY.
3. TRANSFER PUMP, 7-1/2 H.P.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT SHALL COMPLY WITH THE APPLICABLE REQUIRMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 464



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. D16744  
A/N 209559**

**Equipment Description:**

UNDERGROUND STORAGE TANK (STATION SUMP D-102), 5' DIA. X 10' L., 1400 GALLON CAPACITY.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
(RULE 204)
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
(RULE 204)

**Periodic Monitoring:** NONE

**Emissions and Requirements:** NONE



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. F3446  
A/N 319115**

**Equipment Description:**

STORAGE TANK NO. OR-10, FIXED ROOF, ABOVEGROUND, 10'-10" DIA. X 18'-0" HIGH, 12,000 GALLON CAPACITY.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN COMPLIANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
(RULE 204)
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
(RULE 204)
3. THIS TANK SHALL NOT BE USED FOR STORING PETROLEUM LIQUID HAVING A VAPOR PRESSURE OF 1.5 PSIA OR GREATER UNDER ACTUAL STORAGE CONDITIONS.  
[RULE 1303(b)(2) OFFSETS]
4. THROUGHPUT OF ORGANIC LIQUIDS TO THIS TANK SHALL NOT EXCEED 10,000 BBL PER CALENDAR YEAR.  
[RULE 1303(b)(2) - OFFSET]
5. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):  
  
TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

- VOC: RULE 463
- VOC: RULE 1149



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. F92218  
A/N 442110**

**Equipment Description:**

STORAGE TANK NO. OR-9, EXTERNAL FLOATING ROOF, 30'-0" DIA. X 24'-0" H., 3000 BBL CAPACITY, WELDED SHELL, PONTOON-TYPE, WITH A METALLIC SHOE-TYPE PRIMARY SEAL AND A SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT MUST BE CONDUCTED IN COMPLIANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT MUST BE PROPERLY MAINTAINED AND KEPT IN OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):  
  
TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

- VOC: RULE 463
- VOC: RULE 1149
- VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. F77344  
A/N 444799**

**Equipment Description:**

STORAGE TANK NO. OR-1, EXTERNAL FLOATING ROOF, 80'-0" DIA. X 40'-0" H., 35,500 BBL CAPACITY, WELDED SHELL, PONTOON-TYPE, WITH A METALLIC SHOE-TYPE PRIMARY SEAL AND A WIPER-TYPE SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT MUST BE CONDUCTED IN COMPLIANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT MUST BE PROPERLY MAINTAINED AND KEPT IN OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):  
  
TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 463  
VOC: RULE 1149  
VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. F77345  
A/N 444800**

**Equipment Description:**

STORAGE TANK NO.OR-2, EXTERNAL FLOATING ROOF, 70'-0" DIA. X 40'-0" H., 27,000 BBE CAPACITY, WELDED SHELL, PONTOON-TYPE, WITH A METALLIC SHOE-TYPE PRIMARY SEAL AND A WIPER-TYPE SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):  
  
TYPE OF LIQUID STORED  
THROUGHPUT  
TURNS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

- VOC: RULE 463
- VOC: RULE 1149
- VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

Permit No. F77346  
A/N 444801

**Equipment Description:**

STORAGE TANK NO. OR-5, EXTERNAL FLOATING ROOF, 60'-0" DIA. X 40'-0" H., 20,000 BBL CAPACITY, WELDED SHELL, PONTOON-TYPE, WITH A METALLIC SHOE-TYPE PRIMARY SEAL AND A WIPER-TYPE SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]

2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]

3. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):

TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 463  
VOC: RULE 1149  
VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. F77347  
A/N 444802**

**Equipment Description:**

STORAGE TANK NO.OR-3, EXTERNAL FLOATING ROOF, 60'-0" DIA. X 48'-0" H., 24,000 BBL CAPACITY, WELDED SHELL, PONTOON-TYPE, WITH A METALLIC SHOE-TYPE PRIMARY SEAL AND A WIPER-TYPE SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):  
  
TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

- VOC: RULE 463
- VOC: RULE 1149
- VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. F77348  
A/N 444803**

**Equipment Description:**

STORAGE TANK NO. OR-4, EXTERNAL FLOATING ROOF, 60'-0" DIA. X 48'-0" H., 24,000 BBL. CAPACITY, WELDED SHELL, PONTOON-TYPE, WITH A METALLIC SHOE-TYPE PRIMARY SEAL AND A WIPER-TYPE SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]

2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]

3. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):

TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 463  
VOC: RULE 1149  
VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

Permit No. F98622  
A/N: 459635

**Equipment Description:**

STORAGE TANK NO: OR-8, 86'-6" DIA. X 40'-0" H., 50,000-BBL CAPACITY, WELDED SHELL, INTERNAL FLOATING ROOF WITH MECHANICAL SHOE PRIMARY SEAL AND RIM MOUNTED, WIPER TYPE SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT MUST BE CONDUCTED IN COMPLIANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT MUST BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL NOT USE THIS EQUIPMENT WITH MATERIALS HAVING A TRUE VAPOR PRESSURE OF 9.14 PSIA OR GREATER UNDER ACTUAL STORAGE CONDITIONS.  
[RULE 1303(b)(2)-OFFSETS, RULE 1313(g)-EMISSION LIMITS]
4. THE OPERATOR SHALL LIMIT THE THROUGHPUT TO NO MORE THAN 416,667 BARRELS IN ANY ONE CALENDAR MONTH.  
[RULE 1303(b)(2)-OFFSETS, RULE 1313(g)-EMISSION LIMITS]
5. THE OPERATOR SHALL OPERATE THIS TANK IN SUCH A MANNER THAT THE ORGANIC VAPOR CONCENTRATION MEASURED IN THE VAPOR SPACE ABOVE THE INTERNAL FLOATING ROOF DOES NOT EXCEED 30 PERCENT OF ITS LOWER EXPLOSIVE LIMIT (LEL). THE OPERATOR SHALL USE AN EXPLOSIMETER OR EQUIVALENT TO MONITOR THE VAPOR SPACE AND MONITORING SHALL OCCUR AT LEAST TWICE ANNUALLY AT 4 TO 8 MONTH INTERVALS.  
[RULE 463, 1178]
6. THE OPERATOR SHALL KEEP RECORDS, IN A MANNER APPROVED BY THE SCAQMD, OF THE THROUGHPUT AND VAPOR PRESSURE OF STORED LIQUID(S). THE RECORDS SHALL BE KEPT ON FILE FOR FIVE YEARS AND MADE AVAILABLE TO SCAQMD PERSONNEL UPON REQUEST.  
[RULE 463, 60 CFR 60 SUBPART Kb]

Periodic Monitoring: NONE



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**Emissions and Requirements:**

7. THIS EQUIPMENT SHALL COMPLY WITH THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 464  
VOC: RULE 1149  
VOC: 40 CFR 60 SUBPART Kb  
HAP/TOC: 40 CFR 63 SUBPART R



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO CONSTRUCT/OPERATE**

**Permit No. G7392**  
**A/N 477567**

**Equipment Description:**

STORAGE TANK NO. OR-7, INTERNAL FLOATING ROOF, DENATURED ETHANOL, 12,000 BBL, DIAMETER: 48 FT.; HEIGHT: 40 FT; WITH A FLOATING ROOF, PAN WELDED SHELL PRIMARY SEAL, MECHANICAL SHOE SECONDARY SEAL, COMPRESSION PLATE-TYPE.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL NOT USE THIS EQUIPMENT WITH MATERIALS HAVING A REID VAPOR PRESSURE GREATER THAN 4 UNDER ACTUAL OPERATING CONDITIONS.  
[RULE 1303(b)(2) - OFFSET]
4. THE OPERATOR SHALL LIMIT THE THROUGHPUT TO NO MORE THAN 157,738 BARRELS IN ANY ONE CALENDAR MONTH.  
[RULE 1303(b)(2) - OFFSET, 1401]
5. THE OPERATOR SHALL USE THIS EQUIPMENT IN SUCH A MANNER THAT THE ORGANIC VAPOR CONCENTRATION BEING MONITORED, AS INDICATED BELOW, DOES NOT EXCEED 30 PERCENT OF THE LOWER EXPLOSIVE LIMIT.  
[RULE 463]
6. THE OPERATOR SHALL USE AN EXPLOSIMETER OR EQUIVALENT TO MONITOR THE VAPOR SPACE ABOVE THE INTERNAL FLOATING ROOF.  
[RULE 463]
7. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):  
  
TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

8. THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 463

VOC: RULE 1149

VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. G28981  
A/N 482011**

**Equipment Description:**

VAPOR RECOVERY SYSTEM, SERVING LOADING RACK 1 AND LOADING RACK 2, CONSISTING OF:

1. VAPOR HOLDING TANK (V-102), CAPACITY 126,420 GALLONS, 30'-0" DIA. X 24'-0" H.
2. AFTERBURNER, JOHN ZINK, 8'-0" DIA. X 45"-0" H., 63 MM BTU/HR., WITH A 10 H.P. BOOSTER BLOWER AND TWO AIR ASSIST BLOWERS, 2 HP EACH.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN COMPLIANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL USE THIS EQUIPMENT IN SUCH A MANNER THAT THE TEMPERATURE IN THE COMBUSTION CHAMBER IS NOT LESS THAN 1400 DEGREES FAHRENHEIT.  
[RULE 1303(a)(1)-BACT]

**Periodic Monitoring:**

4. THE OPERATOR SHALL CONDUCT SOURCE TEST(S) FOR THE POLLUTANT(S) IDENTIFIED BELOW.

Pollutant(s) to be Tested	Required test Method(s)	Averaging Time	Test Location
VOC	Approved District Method	District Approved Averaging Time	Outlet

THE TEST(S) SHALL BE CONDUCTED AT LEAST ONCE EVERY 60 CALENDAR MONTHS.

THE TEST SHALL BE CONDUCTED UNDER ACTUAL OPERATING CONDITIONS.

THE TEST SHALL DETERMINE THE BULK LOADING RATE IN GALLONS PER HOUR DURING THE SOURCE TEST.

THE TEST SHALL BE CONDUCTED TO DEMONSTRATE COMPLIANCE WITH THE VOC EMISSION LIMIT ON THIS PERMIT.



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

[RULE 462, RULE 1303(a)(1)-BACT, 1303(b)(2)-OFFSETS, 3004(a)PERIODIC MONITORING]

5. THE OPERATOR SHALL INSTALL AND MAINTAIN A CHART RECORDER TO RECORD THE TEMPERATURE OF THE EXHAUST GASES IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPROVED RULE 462 PLAN (APPLICATION NO. 324944), UNLESS OTHERWISE NOTED BELOW. THE RANGE OF THE CHART RECORDER SHALL BE SET SUCH THAT THE REQUIRED TEMPERATURE OF THE THERMAL OXIDIZER IS BETWEEN 30% AND 90% FUEL SCALE. A DIGITAL READOUT OF THE TEMPERATURE SHALL BE MAINTAINED IN A LOCATION ACCESSIBLE TO AQMD PERSONNEL.

[RULE 462, RULE 1303(a)(1)-BACT, RULE 3004(a)(4)-PERIODIC MONITORING]

**Emissions and Requirements:**

6. THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

CO: 2000 PPMV, RULE 407  
PM: RULE 404, SEE APPENDIX B FOR EMISSION LIMITS  
PM: 0.1 GRAINS/SCF, RULE 409  
VOC: 0.08 LBS/1000 GAL, RULE 462  
VOC: 0.045 LBS/1000 GAL, RULE 1303(b)(2)-OFFSETS, RULE 1313(g)-EMISSION LIMITS  
VOC: 35 MG/L, 40 CFR 60 SUBPART XX  
NOX: 3127 LB/MONTH, RULE 1313(g)-EMISSION LIMITS  
CO: 9198 LB/MONTH, RULE 1313(g)-EMISSION LIMITS



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. G28983  
A/N 482012**

**Equipment Description:**

BULK LOADING RACK NO. 1 (THIRTEEN POSITION GASOLINE AND DIESEL TANK TRUCK LOADING)  
CONSISTING OF:

1. THIRTEEN BOTTOM LOADING ASSEMBLIES, 4" DIA., EACH WITH DRY BREAK COUPLER.
2. TWELVE TURBINE METERS AND ONE POSITIVE DISPLACEMENT METER.
3. THREE LOADING PUMPS, EACH CENTRIFUGAL TYPE WITH MECHANICAL SEAL, TWO WITH 40 HP MOTOR EACH, AND ONE WITH 20 HP MOTOR.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL LIMIT THE THROUGHPUT TO NO MORE THAN 3,300,000 GALLON(S) PER DAY.

FOR THE PURPOSE OF THIS CONDITION, THROUGHPUT SHALL BE DEFINED AS GASOLINE AND DIESEL LOADED THROUGH BULK LOADING RACK NO. 1 AND BULK LOADING RACK NO. 2.

THE OPERATOR SHALL MAINTAIN RECORDS IN A MANNER APPROVED BY THE DISTRICT TO DEMONSTRATE COMPLIANCE WITH THIS CONDITION.

THE OPERATOR SHALL COMPLY WITH THIS THROUGHPUT LIMIT TO COMPLY WITH RULE 462 (d)(1)(A), WHICH IS THE CURRENT CALIFORNIA AIR RESOURCES BOARD'S CERTIFICATION (CARB) LIMIT. THIS LIMIT MAY BE MODIFIED AT A LATER DATE BASED ON A NEW CARB OR DISTRICT CERTIFICATION.  
[RULE 462]

4. THE OPERATOR SHALL LIMIT THE THROUGHPUT TO NO MORE THAN 63,000,000 GALLON(S) PER MONTH.



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

FOR THE PURPOSE OF THIS CONDITION, THROUGHPUT SHALL BE DEFINED AS GASOLINE AND DIESEL LOADED THROUGH BULK LOADING RACK NO. 1 AND BULK LOADING RACK NO. 2

THE OPERATOR SHALL MAINTAIN RECORDS IN A MANNER APPROVED BY THE DISTRICT TO DEMONSTRATE COMPLIANCE WITH THIS CONDITION:

[RULE 462, 1303(b)(2)-OFFSETS, 1313(g)-EMISSION LIMITS, 40CFR 60 SUBPART XX]

5. THE OPERATOR SHALL VENT THE VENT GASES FROM THIS EQUIPMENT AS FOLLOWS:

ALL VENT GASES FROM THIS LOADING RACK SHALL BE VENTED TO THE VAPOR RECOVERY AND DISPOSAL SYSTEM AND SHALL NOT BE VENTED TO ANY OTHER LOADING RACK.

THIS EQUIPMENT SHALL NOT BE OPERATED UNLESS THE VAPOR RECOVERY AND DISPOSAL SYSTEM IS IN FULL USE AND HAS A VALID PERMIT TO RECEIVE VENT GASES FROM THIS EQUIPMENT.

[RULE 462, 40CFR 60 SUBPART XX]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

6. THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

TOC/VOC: 35 MG/L, 40CFR 60 SUBPART XX

VOC: 0.08 LB/1000 GAL, RULE 462

VOC: 0.045 LB/1000 GAL, RULE 1303(b)(2)-OFFSET, 1313(g)-EMISSION LIMITS



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. G28984  
A/N 482013**

**Equipment Description:**

**BULK LOADING RACK NO. 2 (SIXTEEN POSITION GASOLINE AND DIESEL TANK TRUCK LOADING RACK) CONSISTING OF:**

1. SIXTEEN (16) BOTTOM LOADING ARMS, 4" DIA., EACH WITH DRY BREAK COUPLER.
2. EIGHT (8) LOADING RACK METERS.
3. FOUR (4) LOADING PUMPS, CENTRIFUGAL TYPE WITH MECHANICAL SEAL, 60 HP.
4. CONTROL VALVES.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL LIMIT THE THROUGHPUT TO NO MORE THAN 3,300,000 GALLON(S) PER DAY.

FOR THE PURPOSE OF THIS CONDITION, THROUGHPUT SHALL BE DEFINED AS GASOLINE AND DIESEL LOADED THROUGH BULK LOADING RACK NO. 1 AND BULK LOADING RACK NO. 2.

THE OPERATOR SHALL MAINTAIN RECORDS IN A MANNER APPROVED BY THE DISTRICT TO DEMONSTRATE COMPLIANCE WITH THIS CONDITION.

THE OPERATOR SHALL COMPLY WITH THIS THROUGHPUT LIMIT TO COMPLY WITH RULE 462 (D)(1)(A), WHICH IS THE CURRENT CALIFORNIA AIR RESOURCES BOARD'S CERTIFICATION (CARB) LIMIT. THIS LIMIT MAY BE MODIFIED AT A LATER DATE BASED ON A NEW CARB OR DISTRICT CERTIFICATION.  
[RULE 462]

4. THE OPERATOR SHALL LIMIT THE THROUGHPUT TO NO MORE THAN 63,000,000 GALLON(S) PER MONTH.



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

FOR THE PURPOSE OF THIS CONDITION, THROUGHPUT SHALL BE DEFINED AS GASOLINE AND DIESEL LOADED THROUGH BULK LOADING RACK NO. 1 AND BULK LOADING RACK NO. 2

THE OPERATOR SHALL MAINTAIN RECORDS IN A MANNER APPROVED BY THE DISTRICT TO DEMONSTRATE COMPLIANCE WITH THIS CONDITION:

[RULE 462, 1303(b)(2)-OFFSETS, 1313(g)-EMISSION LIMITS, 40CFR 60 SUBPART XX]

5. THE OPERATOR SHALL VENT THE VENT GASES FROM THIS EQUIPMENT AS FOLLOWS:

ALL VENT GASES FROM THIS LOADING RACK SHALL BE VENTED TO THE VAPOR RECOVERY AND DISPOSAL SYSTEM AND SHALL NOT BE VENTED TO ANY OTHER LOADING RACK.

THIS EQUIPMENT SHALL NOT BE OPERATED UNLESS THE VAPOR RECOVERY AND DISPOSAL SYSTEM IS IN FULL USE AND HAS A VALID PERMIT TO RECEIVE VENT GASES FROM THIS EQUIPMENT.

[RULE 462, 40CFR 60 SUBPART XX]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

6. THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

TOC/VOC: 35 MG/L, 40CFR 60 SUBPART XX

VOC: 0.08 LB/1000 GAL, RULE 462

VOC: 0.045 LB/1000 GAL, RULE 1303(b)(2)-OFFSET, 1313(g)-EMISSION LIMITS



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

Permit No. G28985  
A/N 511411

**Equipment Description:**

STORAGE TANK NO. OR-6; EXTERNAL FLOATING ROOF, 60'-0" DIA. X 40'-0" H, 20,000 BBL CAPACITY, WELDED SHELL, PONTOON-TYPE, WITH A METALLIC SHOE-TYPE PRIMARY SEAL AND A WIPER-TYPE SECONDARY SEAL.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THE OPERATOR SHALL KEEP RECORDS, IN MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):  
  
TYPE OF LIQUID STORED  
THROUGHPUT  
TURNOVERS  
RANGES OF TRUE VAPOR PRESSURE OF SUCH LIQUIDS  
[RULE 463]

**Periodic Monitoring:** NONE

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 463  
VOC: RULE 1149  
VOC: RULE 1178



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO OPERATE**

**Permit No. G28982  
A/N 524810**

**Equipment Description:**

**WASTE OIL/WATER SEPARATION SYSTEM CONSISTING OF:**

1. DEBRIS COLLECTOR SUMP, 3'-0" DIA. X 7'-0" H., UNDERGROUND, FIXED COVER AND ENCLOSED.
2. WASTE OIL/WATER SEPARATOR, 8'-3 1/2"DIA. X 27'-2"L., UNDERGROUND, FIXED COVER AND ENCLOSED.
3. WATER PUMP, TURBINE TYPE, VERTICAL 200 GPM, WITH A MECHANICAL SEAL AND A 7.5-H.P. MOTOR.
4. PRODUCT PUMP, TURBINE TYPE, VERTICAL, 100 GPM, WITH A MECHANICAL SEAL AND A 5.H.P. MOTOR.
5. WATER CIRCULATION PUMP, CENTRIFUGAL TYPE, 80 GPM, WITH A MECHANICAL SEAL AND A 10 H.P. MOTOR.
6. HOLDING TANK, WITH SECONDARY CONTAINMENT, STORING WATER FROM OIL/WATER SEPARATOR.

**Conditions:**

1. OPERATION OF THIS EQUIPMENT MUST BE CONDUCTED IN COMPLIANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT MUST BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. THROUGHPUT OF WASTEWATER SHALL NOT EXCEED 62083 GALLONS IN ANY ONE CALENDAR MONTH. A FLOW METER SHALL BE MAINTAINED TO MEASURE THE FLOW OF WASTEWATER THROUGH THIS SYSTEM.  
[RULE 1303(b)(2)-OFFSETS]

**Periodic Monitoring:** NONE



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**Emissions and Requirements:**

4. THIS EQUIPMENT SHALL COMPLY WITH THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATIONS:

VOC: RULE 464

VOC: 12.4 LB/MONTH, 1313(g)-EMISSION LIMITS



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**PERMIT TO CONSTRUCT/OPERATE**

**Permit No. G29532  
A/N 531070  
Granted 01/24/2014**

**Equipment Description:**

ALTERATION OF AN EXISTING DENATURED ETHANOL TANK TRUCK UNLOADING RACK SYSTEM (PREVIOUSLY PERMITTED UNDER A/N 366667:P/O F73531) CONSISTING OF:

1. TWO (2) 4" TRUCK CONNECTIONS
2. TWO (2) SUBMERSIBLE PUMPS, DOUBLE MECHANICAL SEAL, 5 H.P. EACH.
3. TWO PUMP SLEEVE TUBES
4. ONE FILL TUBE

**BY THE ADDITION OF:**

1. VAPOR BALANCE SYSTEM CONNECTING UNLOADING SYSTEM TO TANKER TRUCK(S).

**Conditions:**

1. CONSTRUCTION AND OPERATION OF THIS EQUIPMENT SHALL BE CONDUCTED IN ACCORDANCE WITH ALL DATA AND SPECIFICATIONS SUBMITTED WITH THE APPLICATION UNDER WHICH THIS PERMIT IS ISSUED UNLESS OTHERWISE NOTED BELOW.  
[RULE 204]
2. THIS EQUIPMENT SHALL BE PROPERLY MAINTAINED AND KEPT IN GOOD OPERATING CONDITION AT ALL TIMES.  
[RULE 204]
3. DURING UNLOADING OPERATIONS, THE VAPOR BALANCE SYSTEM SHALL BE CONNECTED AND IN FULL USE SO THAT DISPLACED VAPORS FROM THE UNLOADING OPERATION SHALL BE VENTED TO THE TRUCK(S) BEING UNLOADED.  
[RULE 1303(a)(1)-BACT, 1303(b)(2)-OFFSETS, 1401]
4. ALL NEW VALVES AND MAJOR COMPONENTS IN VOC SERVICE AS DEFINED IN RULE 1173, EXCEPT THOSE SPECIFICALLY EXEMPTED BY RULE 1173, SHALL BE DISTINCTLY IDENTIFIED FROM OTHER COMPONENTS THROUGH THEIR TAG NUMBER (e.g. NUMBERS ENDING IN THE LETTER "N") AND SHALL BE NOTED IN THE RECORDS.

ALL NEW FUGITIVE COMPONENTS IN VOC SERVICE, EXCEPT VALVES AND FLANGES, SHALL BE INSPECTED QUARTERLY USING EPA REFERENCE METHOD 21. ALL NEW VALVES AND FLANGES IN VOC SERVICE SHALL BE INSPECTED MONTHLY USING EPA METHOD 21.



## FACILITY PERMIT TO OPERATE SFPP, L.P. (NSR USE ONLY)

FOR ALL NEW FUGITIVE COMPONENTS IN VOC SERVICE, ANY LEAK GREATER THAN 500 PPM, MEASURED AS METHANE, ABOVE BACKGROUND, AS MEASURED USING EPA METHOD 21, SHALL BE REPAIRED WITHIN 14 DAYS OF DETECTION. COMPONENTS SHALL BE DEFINED AS ANY VALVE, FITTING, PUMP, COMPRESSOR, PRESSURE RELIEF VALVE, DIAPHRAGM, HATCH, SIGHT-GLASS, AND METER.

IF 98.0 PERCENT OR GREATER OF THE NEW (NON-BELLOWS-SEALED) VALVES AND THE NEW FLANGE POPULATION INSPECTED IS FOUND TO LEAK GASEOUS OR LIQUID VOLATILE ORGANIC COMPOUNDS AT A RATE LESS THAN 500 PPM FOR TWO CONSECUTIVE MONTHS, THEN THE OPERATOR SHALL REVERT TO A QUARTERLY INSPECTION PROGRAM WITH THE APPROVAL OF THE DISTRICT.

THE OPERATOR SHALL REVERT FROM QUARTERLY TO MONTHLY INSPECTION PROGRAM IF LESS THAN 98.0 PERCENT OF THE NEW (NON-BELLOWS SEAL) VALVES AND THE NEW FLANGE POPULATION IS FOUND TO LEAK GASEOUS OR LIQUID VOLATLE ORGANIC COMPOUNDS AT A RATE OF LESS THAN 500 PPM.

THE OPERATOR SHALL KEEP RECORDS OF THE MONTHLY INSPECTION (AND QUARTERLY, WHERE APPLICABLE), SUBSEQUENT REPAIR, AND REINSPECTION, IN A MANNER APPROVED BY THE DISTRICT.

[1303(b)2)-OFFSET]

5. THE OPERATOR SHALL PROVIDE TO THE DISTRICT, NO LATER THAN 60 DAYS AFTER COMPLETION OF CONSTRUCTION, A RECALCULATION OF THE FUGITIVE EMISSIONS BASED ON ACTUAL COMPONENTS INSTALLED AND/OR REMOVED FROM SERVICE. THE OPERATOR SHALL ALSO PROVIDE COMPLETE, AS BUILT, PIPING AND INSTRUMENTATION DIAGRAM(S) WITH A LISTING OF ALL NON-LEAKLESS TYPE VALVES CATEGORIZED BY TAG NO. SIZE, TYPE SERVICE, OPERATING CONDITIONS (i.e. TEMPERATURE AND PRESSURE), BODY MATERIAL, APPLICATION.  
[RULE 1303(b)2)-OFFSET]
6. THIS PERMIT TO CONSTRUCT SHALL EXPIRE JANUARY 23, 2015 UNLESS AN EXTENSION IS GRANTED BY THE EXECUTIVE OFFICER.  
[RULE 205]
7. RECORDS OF THROUGHPUT, TYPES OF PRODUCT STORED, AND VAPOR PRESSURE OF PRODUCT SHALL BE MAINTAINED FOR AT LEAST 5 YEARS AND MADE AVAILABLE TO DISTRICT PERSONNEL UPON REQUEST.  
[RULE 462, 1401]

Periodic Monitoring: NONE

Emissions and Requirements: NONE



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, COATING EQUIPMENT, PORTABLE, ARCHITECTURAL COATINGS.

**Periodic Monitoring:** NONE

**Conditions:**

1. THE OPERATOR SHALL KEEP RECORDS, IN A MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):

FOR ARCHITECTURAL APPLICATIONS WHERE NO THINNERS, REDUCERS, OR OTHER VOC CONTAINING MATERIALS ARE ADDED, MAINTAIN SEMI-ANNUAL RECORDS OF ALL COATINGS CONSISTING OF (A) COATING TYPE, (B) VOC CONTENT AS SUPPLIED IN GRAMS PER LITER (g/l) OF MATERIALS FOR LOW-SOLIDS COATINGS, (C) VOC CONTENT AS SUPPLIED IN g/l OF COATING, LESS WATER AND EXEMPT SOLVENT, FOR OTHER COATING.

FOR OTHER ARCHITECTURAL APPLICATIONS WHERE THINNERS, REDUCERS, OR OTHER VOC CONTAINING MATERIALS ARE ADDED, MAINTAIN DAILY RECORDS FOR EACH COATING CONSISTING OF (A) COATING TYPE, (B) VOC CONTENT AS APPLIED IN GRAMS PER LITER (g/l) OF MATERIALS USED FOR LOW-SOLIDS COATINGS (C) VOC CONTENT AS APPLIED IN g/l OF COATING, LESS WATER AND EXEMPT SOLVENT, FOR OTHER COATING.  
[RULE 3004 (a) (4)]

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

VOC: RULE 1113, SEE APPENDIX B FOR EMISSION LIMITS  
VOC: RULE 1171, SEE APPENDIX B FOR EMISSION LIMITS



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, HAND WIPING OPERATIONS.

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

VOC: RULE 1171, SEE APPENDIX B FOR EMISSION LIMITS



---

**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

---

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, COOLING TOWERS.

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

CR+6: RULE 1404



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, REFRIGERANT RECOVERY AND/OR RECYCLING UNITS.

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

TOC: RULE 1415



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, SMALL UNHEATED NON-CONVEYORIZED CLEANING EQUIPMENT

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

VOC: RULE 1122

VOC: RULE 1171



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, ABRASIVE BLASTING EQUIPMENT, GLOVE-BOX, <53 FT3, WITH DUST FILTER.

**Conditions:**

1. THE OPERATOR SHALL PERFORM AN ANNUAL INSPECTION OF THE EQUIPMENT AND FILTER MEDIA FOR LEAKS, BROKEN OR TORN FILTER MEDIA AND IMPROPERLY INSTALLED FILTER MEDIA. THE OPERATOR SHALL KEEP RECORDS, IN A MANNER APPROVED BY THE DISTRICT, FOR THE FOLLOWING PARAMETER(S) OR ITEM(S):
  - A. THE NAME OF THE PERSON PERFORMING THE INSPECTION AND/OR MAINTENANCE OF THE FILTER MEDIA;
  - B. THE DATE, TIME AND RESULTS OF THE INSPECTION; AND
  - C. THE DATE, TIME AND DESCRIPTION OF ANY MAINTENANCE OR REPAIRS RESULTING FROM THE INSPECTION.[RULE 3004(a)(4), 1140]
  
2. THE OPERATOR SHALL CONDUCT AN INSPECTION FOR VISIBLE EMISSIONS FROM ALL STACKS AND OTHER EMISSION POINTS OF THIS EQUIPMENT WHENEVER THERE IS A PUBLIC COMPLAINT OF VISIBLE EMISSIONS, WHENEVER VISIBLE EMISSIONS ARE OBSERVED, AND ON AN ANNUAL BASIS, AT LEAST, UNLESS THE EQUIPMENT DID NOT OPERATE DURING THE ENTIRE ANNUAL PERIOD. THE ROUTINE ANNUAL INSPECTION SHALL BE CONDUCTED WHILE THE EQUIPMENT IS IN OPERATION AND DURING DAYLIGHT HOURS.  
IF ANY VISIBLE EMISSIONS (NOT INCLUDING CONDENSED WATER VAPOR) ARE DETECTED, THE OPERATOR SHALL TAKE CORRECTIVE ACTION(S) THAT ELIMINATES THE VISIBLE EMISSIONS WITHIN 24 HOURS AND REPORT THE VISIBLE EMISSIONS AS A POTENTIAL DEVIATION IN ACCORDANCE WITH THE REPORTING REQUIREMENTS IN SECTION K OF THIS PERMIT.  
THE OPERATOR SHALL KEEP THE RECORDS IN ACCORDANCE WITH THE RECORDKEEPING REQUIREMENTS IN SECTION K OF THIS PERMIT AND THE FOLLOWING RECORDS:
  - A. STACK OR EMISSION POINT IDENTIFICATION;
  - B. DESCRIPTION OF ANY CORRECTIVE ACTIONS TAKEN TO ABATE VISIBLE EMISSIONS; AND
  - C. DATE AND TIME VISIBLE EMISSION WAS ABATED.[RULE 3004(a)(4), 1140]
  
3. THE OPERATOR SHALL DISCHARGE DUST COLLECTED IN THIS EQUIPMENT ONLY INTO CLOSED CONTAINERS.  
[RULE 3004(a)(4), 1140]

**Periodic Monitoring:** NONE



---

**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

---

**Emissions and Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

- PM: RULE 404, SEE APPENDIX B FOR EMISSION LIMITS
- PM: RULE 405, SEE APPENDIX B FOR EMISSION LIMITS
- PM: RULE 1140, SEE APPENDIX B FOR EMISSION LIMITS



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, LOW USE OR LOW EMISSIONS LAMINATING EQUIPMENT.

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

- VOC: RULE 109
- VOC: RULE 1168
- VOC: RULE 1171



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, FIRE EXTINGUISHING EQUIPMENT USING HALON.

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

TOC: RULE 1418



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT, LOW USE OR LOW EMISSIONS COATING EQUIPMENT.

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

VOC: RULE 109  
VOC: RULE 1107  
VOC: RULE 1171



**FACILITY PERMIT TO OPERATE  
SFPP, L.P. (NSR USE ONLY)**

**RULE 219 EQUIPMENT**

**Equipment Description:**

RULE 219 EXEMPT EQUIPMENT; SMALL BOILERS, WATER HEATERS AND PROCESS HEATERS.

**Conditions:** NONE

**Periodic Monitoring:** NONE

**Emissions And Requirements:**

THIS EQUIPMENT IS SUBJECT TO THE APPLICABLE REQUIREMENTS OF THE FOLLOWING RULES AND REGULATION:

CO: 400 PPMV, RULE 1146.2

CO: 2000 PPMV, RULE 407

PM: 0.1 GRAINS/SCF, RULE 409

PM: RULE 404, SEE APPENDIX B FOR EMISSION LIMITS

NOX: 30 PPMV, RULE 1146.2



**FACILITY PERMIT TO CONSTRUCT  
SFPP, L.P. (NSR USE ONLY)**

**Facility Equipment and Requirements  
(Section H)**

This section consists of a table listing all permitted equipment at the facility, facility wide requirements, all individual Permits to Construct issued to various equipment at the facility subject to source-specific requirements. Each permit will list operating conditions including periodic monitoring requirements, and applicable emission limits and requirements that the equipment is subject to. Also included is the rule origin and authority of each emission limit and permit condition.



---

**FACILITY PERMIT TO CONSTRUCT  
SFPP, L.P. (NSR USE ONLY)**

---

**PERMITTED EQUIPMENT LIST**

THE FOLLOWING IS A LIST OF ALL PERMITS TO CONSTRUCT AT THIS FACILITY:

NONE

**NOTE:** ANY OTHER APPLICATIONS THAT ARE STILL BEING PROCESSED AND HAVE NOT BEEN ISSUED PERMITS TO CONSTRUCT WILL NOT BE FOUND IN THIS TITLE V PERMIT